


Photometric test report

Family Silica® 21 round M	Order number: 51ME33DB3MWA EAN: 4069025802958	LP number 60080_2
	Version Suspended luminaire, housing, white, microprismatic optics, direct-/ indirect distribution, wide distribution, UGR≤19	serial documentation 20.05.2026
	Lamps LED 3000 K CRI ≥ 80	
	Controlgear ECG-DALI	
Rated values Net luminous flux = 7920 lm Power consumption = 50.5 W Luminous efficacy = 156.8 lm/W		



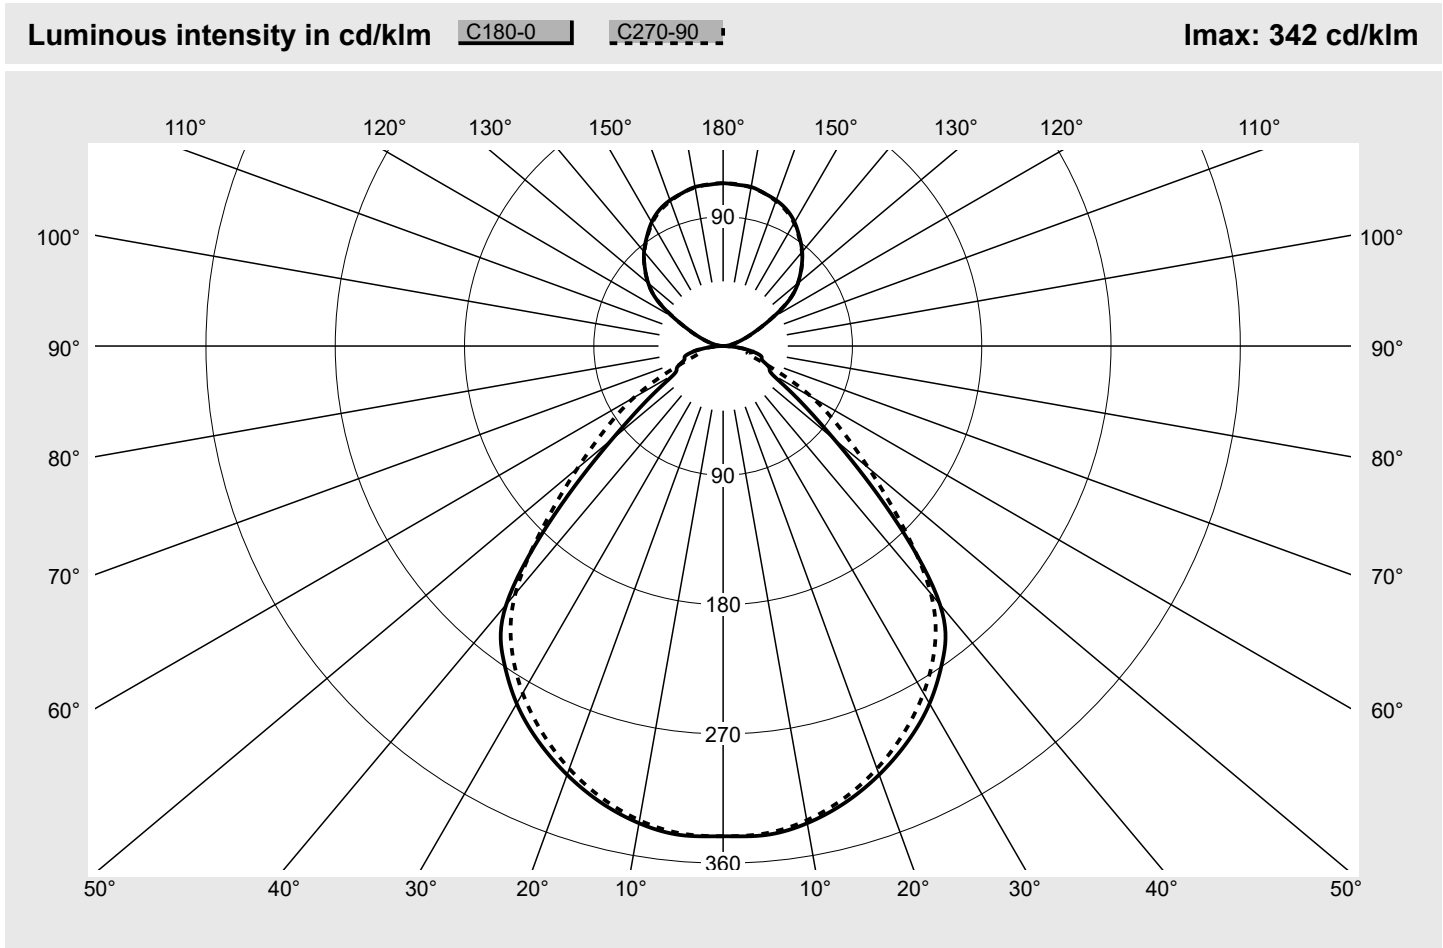

Classifications		Luminaire light output ratios	
DIN 5040	B 5 3	η_{LB}	100.0%
CIE	N1=64 N2=89 N3=97	ϕ_u	70.2%
	N4=70 N5=100	ϕ_o	29.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51ME33DB3MWA EAN: 4069025802958	LP number 60080_2
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	341.2	341.2	341.2	341.2	341.2	341.2	341.2	2.0	2.0
5°	341.7	339.9	337.9	339.1	340.7	340.5	340.5	16.2	18.3
10°	337.3	335.4	333.2	334.1	335.5	335.2	335.2	31.9	50.2
15°	328.9	327.1	324.7	325.3	326.3	325.9	325.7	46.3	96.4
20°	317.5	315.7	313.0	313.1	313.8	313.2	313.1	58.9	155.3
25°	303.8	301.7	298.3	298.2	298.8	297.9	297.4	69.3	224.6
30°	287.4	284.8	280.9	280.7	281.6	280.1	279.0	77.3	301.9
35°	266.6	264.1	259.3	259.6	260.3	258.7	256.6	81.9	383.8
40°	234.8	234.9	230.6	230.3	226.5	227.6	225.0	81.0	464.8
45°	166.0	176.7	179.3	175.8	160.5	175.5	176.3	67.1	531.9
50°	100.9	115.7	135.1	115.7	100.2	113.9	132.2	48.8	580.7
55°	62.2	71.0	100.7	70.7	61.6	69.2	99.0	34.0	614.7
60°	39.6	48.0	70.7	48.5	39.5	47.4	71.5	24.5	639.2
65°	35.4	41.0	43.7	42.1	36.2	42.1	41.4	20.2	659.4
70°	29.0	35.4	22.4	36.0	29.2	36.1	22.1	15.9	675.2
75°	27.4	24.7	19.6	25.2	27.8	25.0	18.0	12.8	688.0
80°	19.7	14.9	19.5	14.5	19.9	15.2	20.8	9.4	697.4
85°	9.2	8.6	7.3	8.6	9.1	8.8	7.3	4.6	702.0
90°	0.6	0.8	0.5	0.7	0.5	0.6	0.3	0.3	702.3
95°	2.6	2.5	2.5	2.5	2.5	2.5	2.5	1.4	703.7
100°	5.8	5.7	5.7	5.8	5.8	5.8	5.8	3.1	706.8
105°	10.2	10.1	10.3	10.4	10.5	10.4	10.4	5.5	712.3
110°	16.8	16.7	17.0	17.1	17.2	17.1	17.1	8.8	721.0
115°	25.9	25.9	26.1	26.2	26.4	26.5	26.4	13.0	734.0
120°	40.0	39.9	39.7	39.7	39.7	39.6	39.6	18.9	752.9
125°	56.5	56.4	56.4	56.3	56.6	56.6	56.3	25.3	778.3
130°	68.0	67.8	68.0	68.3	68.6	68.3	68.0	28.6	806.9
135°	77.1	77.1	77.4	77.9	77.8	77.5	77.3	30.0	836.9
140°	85.6	85.5	85.5	85.8	85.7	85.5	85.3	30.1	867.1
145°	92.6	92.7	92.9	92.8	92.5	92.4	92.2	29.1	896.2
150°	99.5	99.5	99.5	99.3	99.0	99.0	98.8	27.2	923.4
155°	104.7	104.4	104.2	103.9	103.9	103.9	103.9	24.1	947.5
160°	108.0	107.7	107.5	107.3	107.5	107.2	107.3	20.1	967.6
165°	110.2	110.2	110.1	110.3	110.2	109.9	110.2	15.6	983.3
170°	112.4	112.4	112.4	112.1	111.7	111.9	112.1	10.7	993.9
175°	112.7	112.7	112.8	112.9	112.9	113.0	113.1	5.4	999.3
180°	113.3	113.3	113.3	113.3	113.3	113.3	113.3	0.7	1000.0

Photometric test report

Family Silica® 21 round M			Order number: 51ME33DB3MWA EAN: 4069025802958							LP number 60080_2	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	15.0	16.0	15.7	16.8	17.7	14.8	15.8	15.5	16.6	17.5
	3H	15.5	16.5	16.3	17.3	18.2	15.4	16.3	16.2	17.1	18.1
	4H	16.0	16.9	16.8	17.7	18.6	15.7	16.6	16.5	17.4	18.3
	6H	16.4	17.2	17.2	18.0	19.0	16.1	16.9	16.9	17.7	18.7
	8H	16.6	17.3	17.4	18.1	19.1	16.3	17.0	17.1	17.9	18.9
	12H	16.7	17.4	17.5	18.2	19.2	16.4	17.1	17.3	17.9	18.9
4H	2H	15.1	15.9	15.8	16.7	17.7	14.9	15.8	15.7	16.6	17.6
	3H	15.8	16.6	16.6	17.4	18.4	15.8	16.6	16.6	17.4	18.4
	4H	16.4	17.0	17.2	17.9	18.9	16.3	17.0	17.2	17.8	18.8
	6H	17.0	17.5	17.8	18.4	19.4	16.9	17.5	17.7	18.3	19.3
	8H	17.1	17.6	18.0	18.5	19.6	17.1	17.6	18.0	18.5	19.5
	12H	17.4	17.8	18.2	18.7	19.8	17.3	17.8	18.2	18.6	19.7
8H	4H	16.5	17.0	17.4	17.9	18.9	16.5	17.0	17.4	17.9	18.9
	6H	17.3	17.7	18.1	18.5	19.6	17.2	17.7	18.1	18.5	19.6
	8H	17.6	18.0	18.5	18.9	19.9	17.6	18.0	18.5	18.9	20.0
	12H	17.9	18.3	18.8	19.1	20.2	17.9	18.2	18.8	19.1	20.2
12H	4H	16.6	17.0	17.4	17.9	19.0	16.6	17.0	17.4	17.9	18.9
	6H	17.4	17.7	18.3	18.6	19.7	17.4	17.7	18.2	18.6	19.7
	8H	17.7	18.1	18.6	18.9	20.0	17.8	18.1	18.7	19.0	20.1

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 586	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6895.7	7339.1	7445.0	7301.9	6663.9	7287.7	7322.0
50°	4609.3	5287.9	6174.0	5284.8	4578.7	5204.1	6040.3
55°	3183.8	3637.3	5154.4	3621.4	3154.5	3542.7	5068.8
60°	2326.8	2819.0	4150.4	2849.9	2319.7	2782.0	4199.4
65°	2456.9	2852.1	3038.8	2922.3	2518.1	2923.4	2874.8
70°	2492.2	3038.1	1924.6	3095.0	2506.1	3100.9	1901.2
75°	3112.8	2800.4	2222.8	2861.5	3157.7	2840.0	2037.9
80°	3329.9	2521.4	3290.4	2448.5	3368.3	2569.8	3510.4
85°	3096.8	2895.9	2444.8	2905.4	3079.6	2966.7	2457.9

Photometric test report

Family
Silica® 21 round M

Order number: 51ME33DB3MWA
EAN: 4069025802958

LP number
60080_2

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

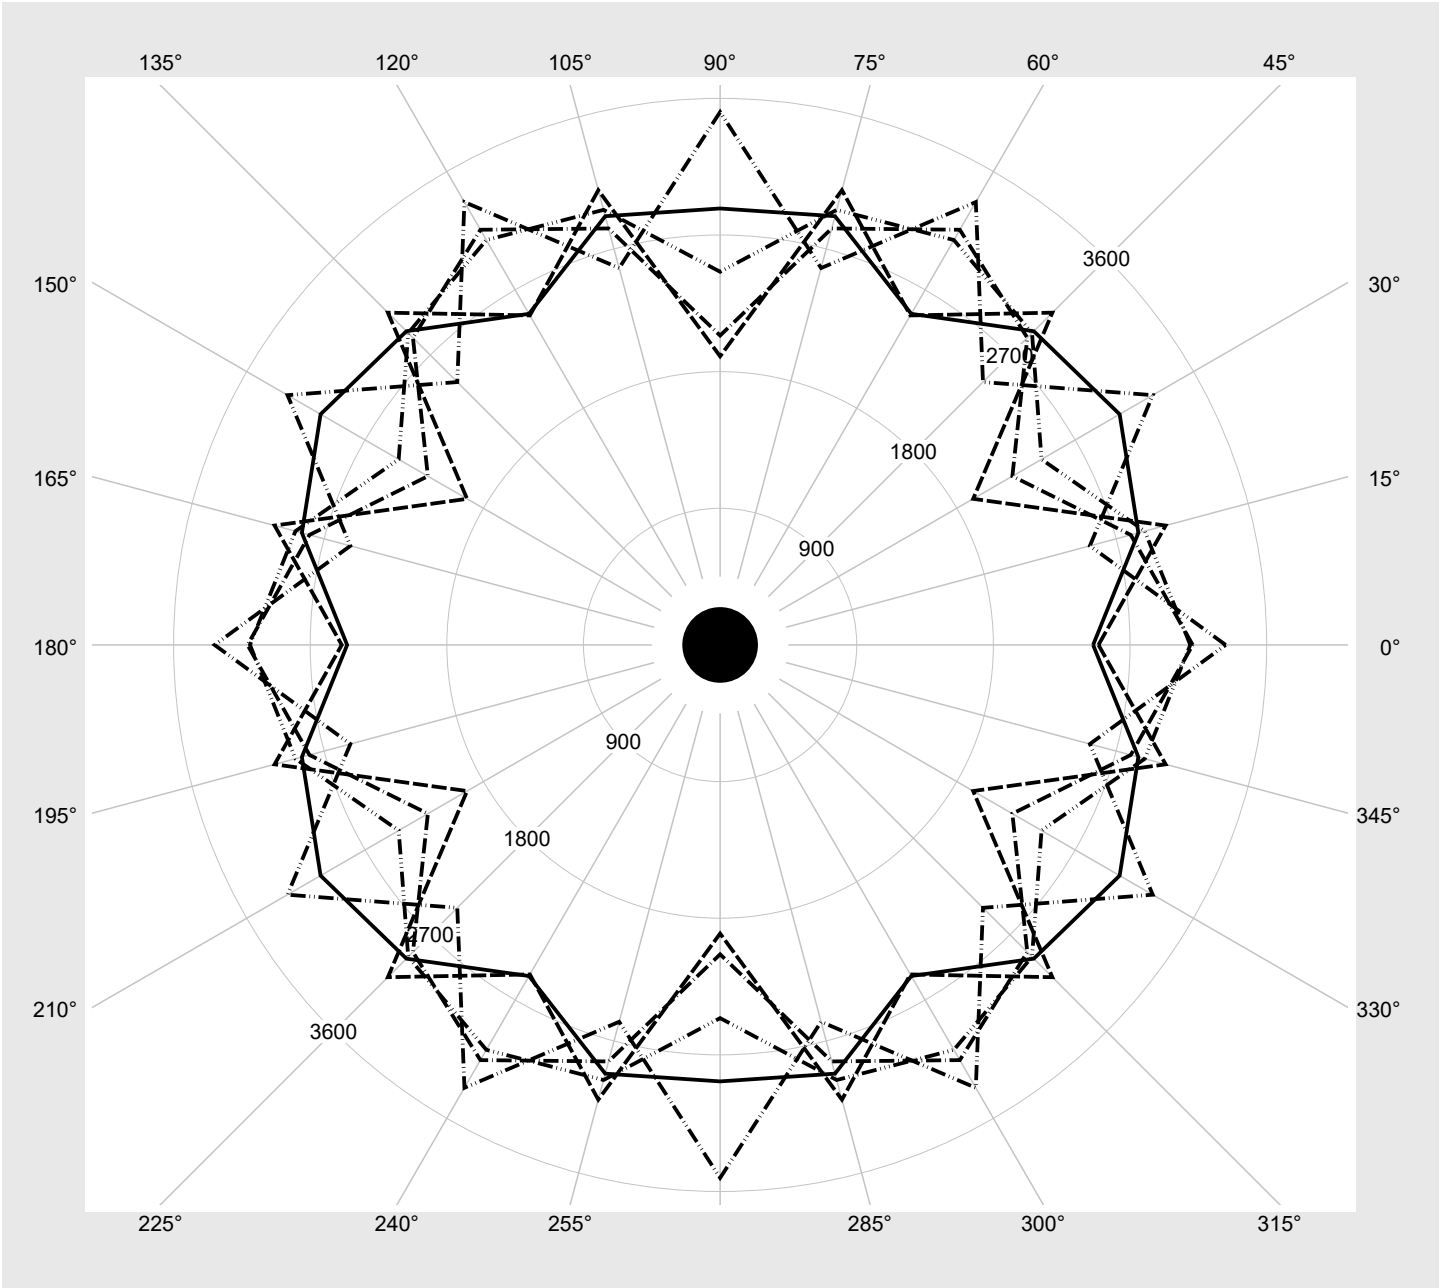

Photometric test report

Family Silica® 21 round M	Order number: 51ME33DB3MWA EAN: 4069025802958	LP number 60080_2
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	7920	50.5
95	241	252	7520	48.0
90	228	250	7118	45.5
85	216	248	6747	43.1
80	203	246	6344	40.6
75	190	243	5940	38.2
70	177	241	5535	35.8
65	165	238	5160	33.5
60	152	235	4753	31.0
55	139	232	4345	28.5
50	127	229	3967	26.2
45	114	225	3558	23.6
40	102	221	3178	21.3
35	89	216	2767	18.7
30	77	210	2386	16.4
25	64	204	1973	13.9
20	52	196	1590	11.6
15	39	185	1176	9.1
10	27	172	792	6.3
5	15	150	407	3.1
2	7	122	150	1.1