

Photometric test report

Family
Silica® 21 round M

Order number: 51ME41DB3NSA
EAN: 4069025803054

LP number
60071_98



Version Suspended luminaire, housing, silver, cover, opal, direct extremely wide distribution, UGR≤22

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 5060 lm
Power consumption = 34.0 W
Luminous efficacy = 148.8 lm/W


serial
documentation
20.05.2026

siteco

Luminous intensity in cd/klm

C180-0

Imax: 372 cd/klm

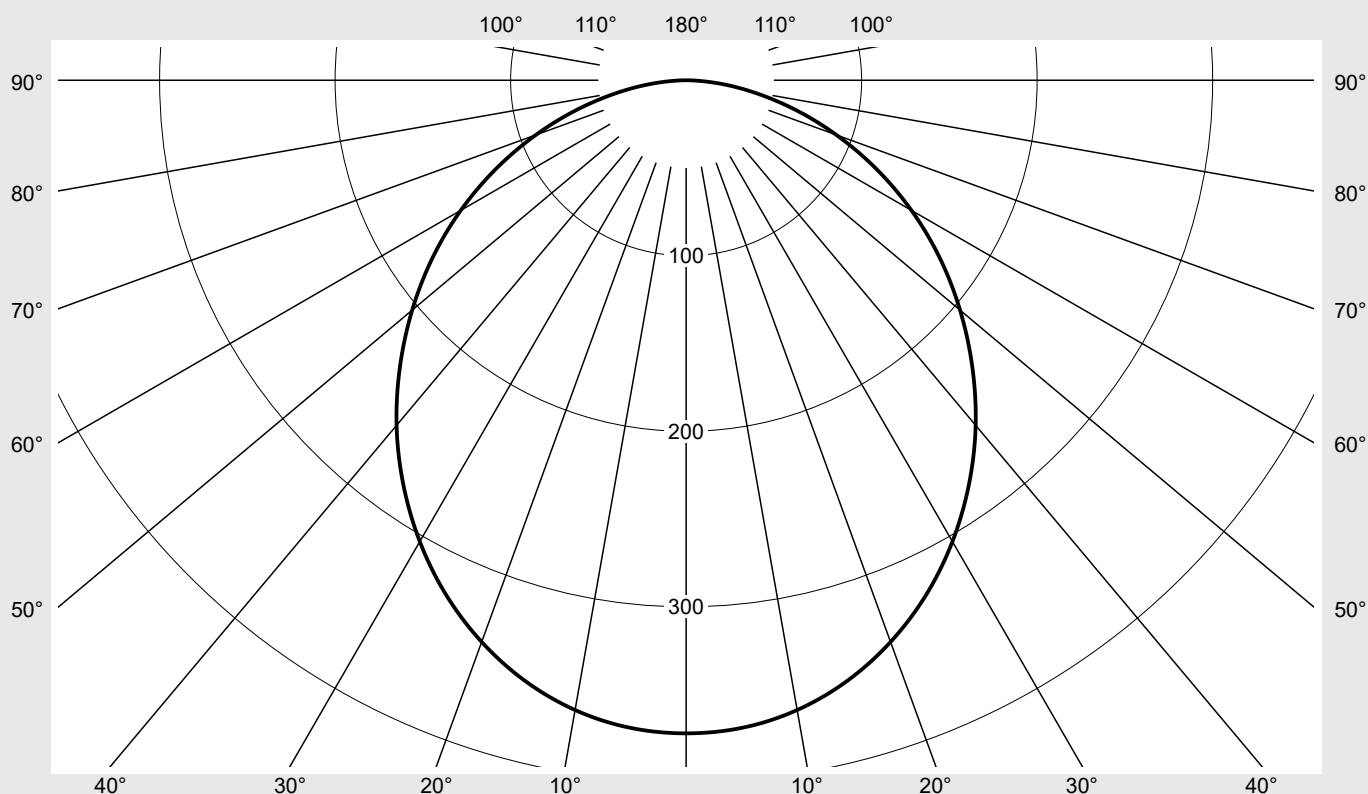

Classifications

DIN 5040 A 4 0
CIE N1=49 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51ME41DB3NSA EAN: 4069025803054	LP number 60071_98
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round M	Order number: 51ME41DB3NSA EAN: 4069025803054	LP number 60071_98
------------------------------	--	-----------------------

UGR-Table		Standard room									siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7	
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2	
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7	
	6H	21.1	22.4	21.5	22.8	23.1	21.1	22.4	21.5	22.8	23.1	
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3	
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3	
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3	
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9	
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6	
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1	
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2	
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3	
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8	
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4	
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6	
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8	
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7	
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4	
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7	

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 586
-----------------	---------------------------------	-------------------------------	---------

C-planes		0°
γ	Luminance in cd/m²	
45°	6117.2	
50°	5946.5	
55°	5769.9	
60°	5562.2	
65°	5309.9	
70°	4999.4	
75°	4626.8	
80°	4152.7	
85°	3547.3	

Photometric test report

Family
Silica® 21 round M

Order number: 51ME41DB3NSA
EAN: 4069025803054

LP number
60071_98

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

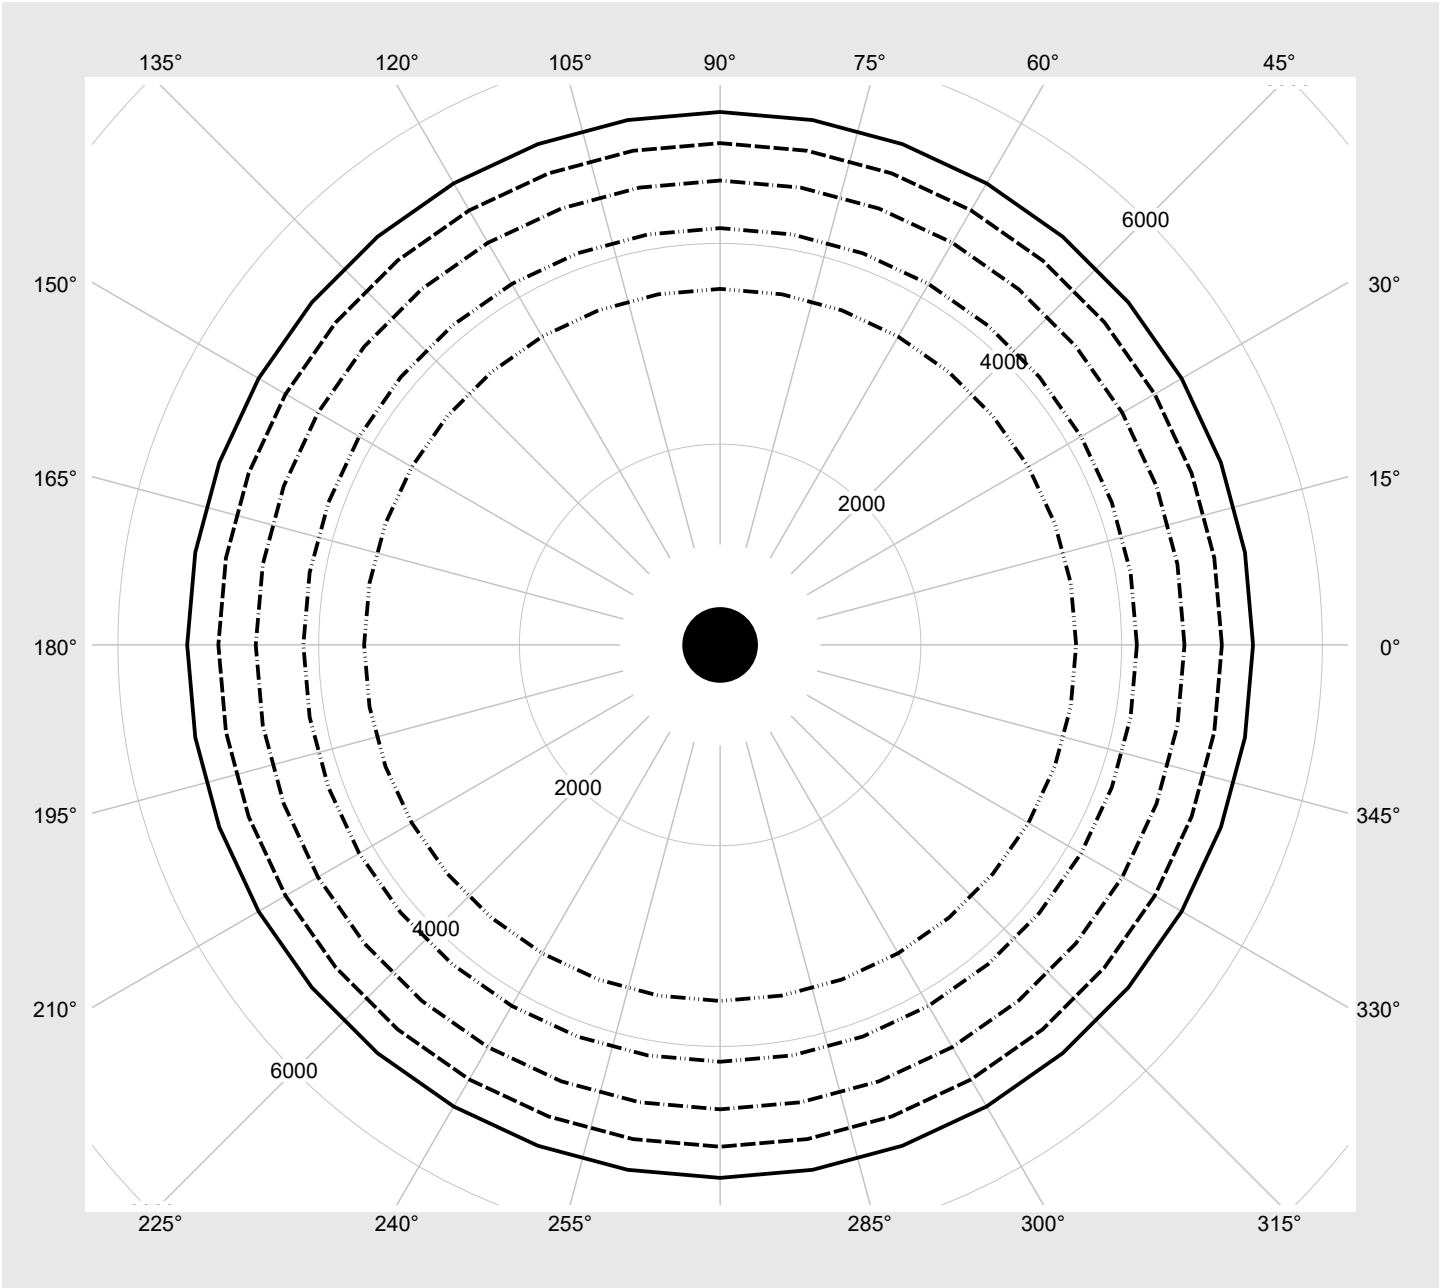

Photometric test report

Family Silica® 21 round M	Order number: 51ME41DB3NSA EAN: 4069025803054	LP number 60071_98
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5060	34.0
95	241	252	4804	32.3
90	228	250	4546	30.6
85	216	248	4309	29.1
80	203	246	4051	27.5
75	190	243	3792	25.8
70	177	241	3533	24.1
65	165	238	3293	22.5
60	152	235	3032	20.9
55	140	232	2792	19.4
50	127	229	2530	17.7
45	114	225	2268	16.1
40	102	221	2026	14.5
35	89	216	1762	13.0
30	77	210	1519	11.6
25	64	204	1255	9.9
20	52	196	1012	8.5
15	40	186	768	6.7
10	27	172	503	4.8
5	15	150	257	3.4
1	6	117	73	2.1