

Photometric test report

Family
Silica® 21 round M

Order number: 51ME41DB4NSA
EAN: 4069025803115

LP number
60071_99



Version Suspended luminaire, housing, silver, cover, opal, direct extremely wide distribution, UGR≤22

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 5060 lm
Power consumption = 32.5 W
Luminous efficacy = 155.7 lm/W


serial
documentation
20.05.2026

siteco

Luminous intensity in cd/klm

C180-0

Imax: 372 cd/klm

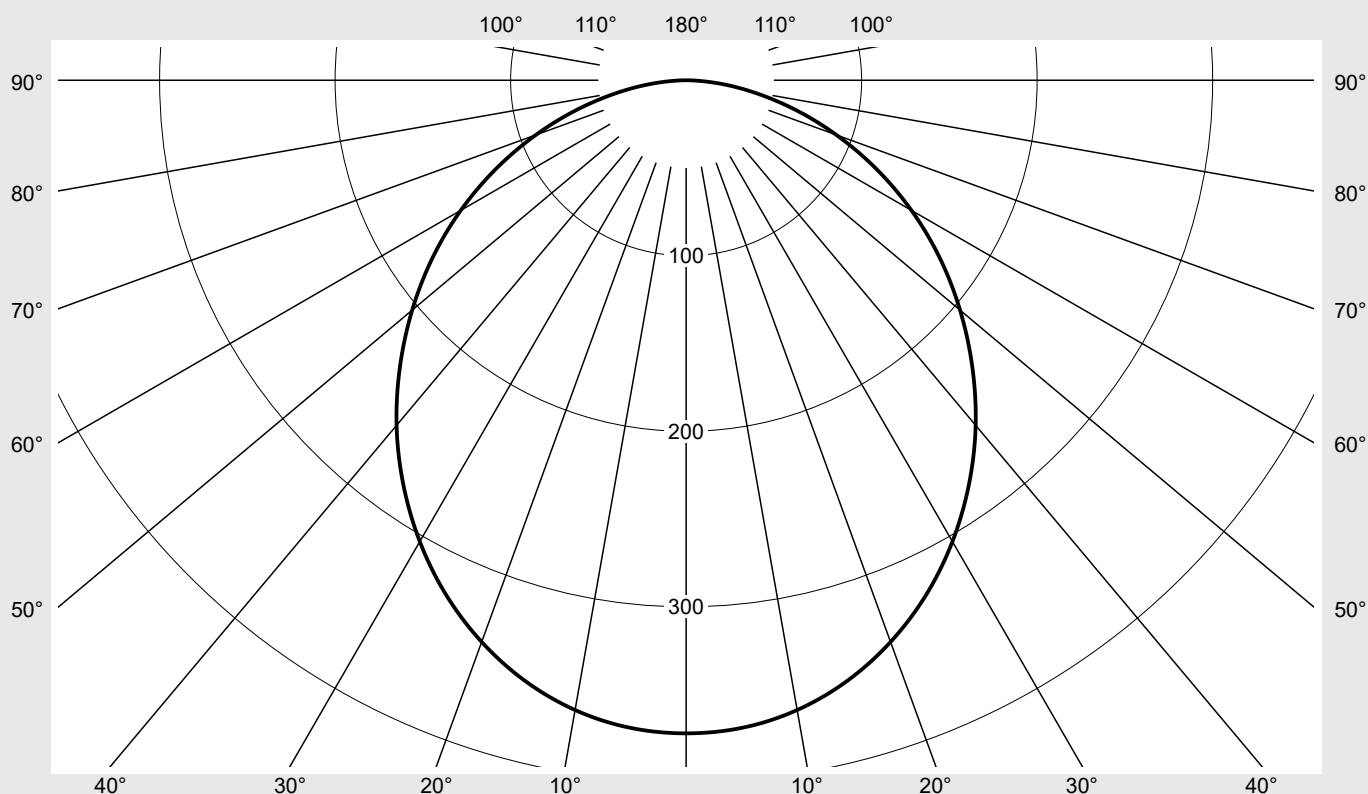

Classifications

DIN 5040 A 4 0
CIE N1=49 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51ME41DB4NSA EAN: 4069025803115	LP number 60071_99
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round M			Order number: 51ME41DB4NSA EAN: 4069025803115							LP number 60071_99	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.8	23.1	21.1	22.4	21.5	22.8	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 586
C-planes	0°		
γ	Luminance in cd/m²		
45°	6117.2		
50°	5946.5		
55°	5769.9		
60°	5562.2		
65°	5309.9		
70°	4999.4		
75°	4626.8		
80°	4152.7		
85°	3547.3		

Photometric test report

Family
Silica® 21 round M

Order number: 51ME41DB4NSA
EAN: 4069025803115

LP number
60071_99

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

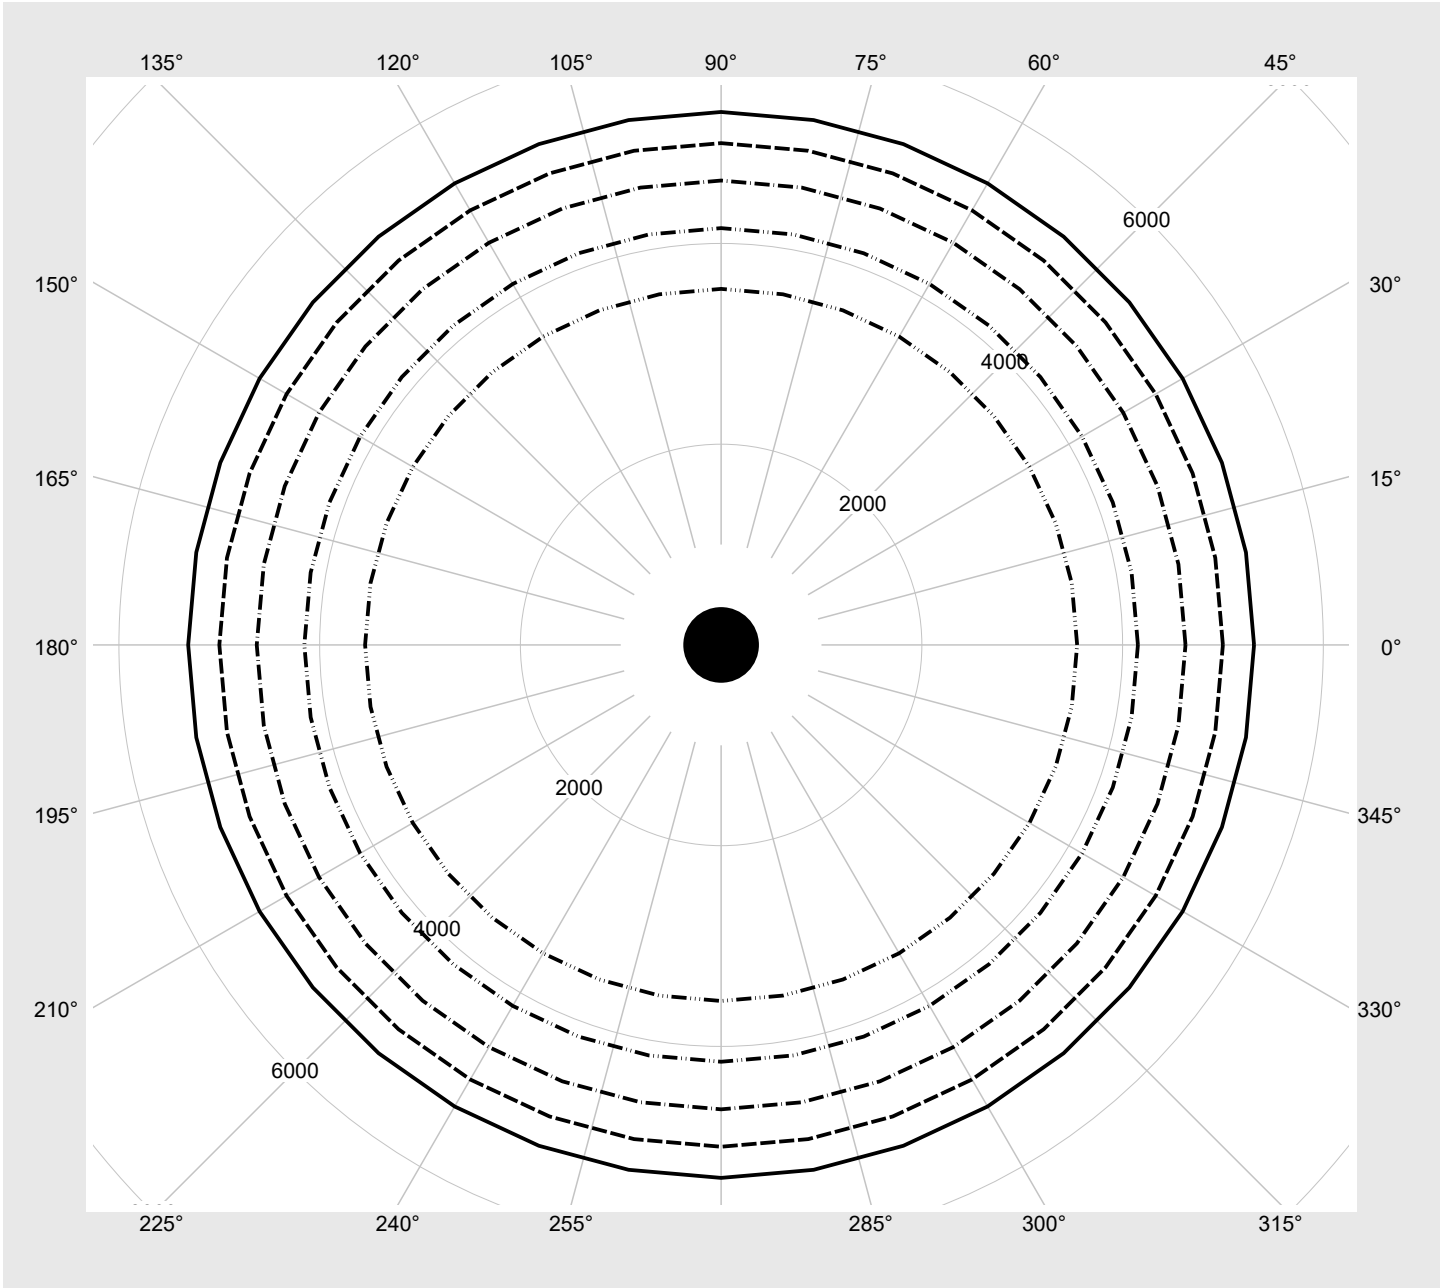

Photometric test report

Family Silica® 21 round M	Order number: 51ME41DB4NSA EAN: 4069025803115	LP number 60071_99
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5060	32.5
95	241	252	4802	30.9
90	228	250	4545	29.3
85	216	248	4306	27.9
80	203	246	4048	26.3
75	190	243	3789	24.7
70	178	241	3548	23.2
65	165	238	3288	21.6
60	152	235	3027	20.1
55	140	232	2787	18.6
50	127	229	2525	17.0
45	115	225	2283	15.6
40	102	221	2021	14.1
35	90	216	1778	12.7
30	77	210	1514	11.2
25	65	204	1271	9.7
20	52	196	1008	8.1
15	40	186	764	6.4
10	27	172	499	4.7
5	15	150	255	3.3
2	7	122	91	2.2