

Photometric test report

Family
Silica® 21 round M

Order number: 51ME43DB4MWA
EAN: 4069025803252

LP number
59826_834

serial
documentation
20.05.2026

siteco



Version Suspended luminaire, housing, white, microprismatic optics, direct wide distribution, UGR≤19

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 5560 lm
Power consumption = 34.8 W
Luminous efficacy = 159.8 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 487 cd/klm

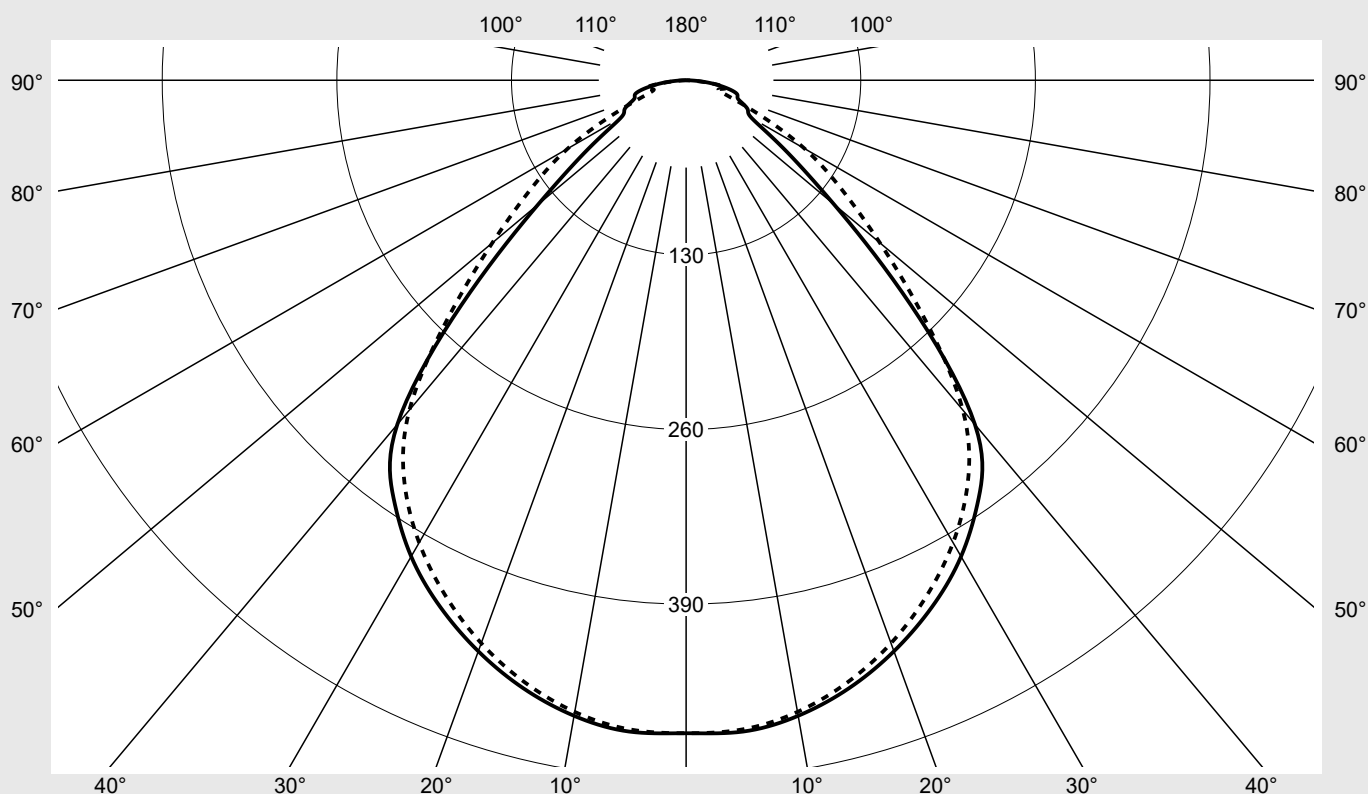

Classifications

DIN 5040 A 5 0
CIE N1=64 N2=89 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51ME43DB4MWA EAN: 4069025803252	LP number 59826_834
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	486.1	486.1	486.1	486.1	486.1	486.1	486.1	2.9	2.9
5°	486.7	484.1	481.4	483.1	485.4	485.1	485.0	23.1	26.0
10°	480.4	477.8	474.6	475.9	477.9	477.5	477.5	45.4	71.5
15°	468.5	466.0	462.5	463.3	464.8	464.2	464.0	65.9	137.4
20°	452.3	449.7	445.8	446.0	446.9	446.2	446.0	83.9	221.2
25°	432.8	429.8	425.0	424.8	425.7	424.4	423.6	98.8	320.0
30°	409.4	405.7	400.1	399.8	401.2	399.1	397.5	110.0	430.0
35°	379.7	376.2	369.4	369.8	370.7	368.6	365.6	116.7	546.7
40°	334.5	334.6	328.5	328.1	322.7	324.2	320.4	115.4	662.1
45°	236.5	251.7	255.4	250.5	228.6	250.0	251.1	95.6	757.7
50°	143.7	164.9	192.5	164.8	142.8	162.3	188.3	69.5	827.3
55°	88.6	101.2	143.4	100.8	87.8	98.6	141.0	48.4	875.6
60°	56.4	68.4	100.7	69.1	56.3	67.5	101.9	34.9	910.5
65°	50.4	58.5	62.3	59.9	51.6	59.9	58.9	28.7	939.3
70°	41.3	50.4	31.9	51.3	41.6	51.4	31.5	22.6	961.8
75°	39.1	35.2	27.9	35.9	39.6	35.7	25.6	18.2	980.1
80°	28.0	21.2	27.7	20.6	28.4	21.6	29.6	13.4	993.4
85°	13.1	12.2	10.3	12.3	13.0	12.5	10.4	6.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round M	Order number: 51ME43DB4MWA EAN: 4069025803252	LP number 59826_834
------------------------------	--	------------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5	18.9
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2	19.5
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4	19.8
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8	20.2
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0	20.4
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1	20.5
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6	19.0
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5	19.9
	4H	18.6	19.5	19.0	19.9	20.4	18.5	19.5	19.0	19.9	20.3
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4	20.8
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6	21.1
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7	21.2
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0	20.5
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7	21.2
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0	21.5
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2	21.8
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0	20.5
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7	21.2
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1	21.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 586	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6895.8	7339.3	7445.2	7302.1	6664.0	7287.8	7322.1
50°	4609.4	5288.0	6174.1	5284.9	4578.8	5204.1	6040.3
55°	3183.9	3637.3	5154.5	3621.4	3154.6	3542.8	5068.9
60°	2326.8	2819.0	4150.5	2850.0	2319.7	2782.0	4199.5
65°	2456.9	2852.1	3038.8	2922.3	2518.2	2923.4	2874.8
70°	2492.3	3038.3	1924.6	3095.1	2506.2	3101.0	1901.3
75°	3112.9	2800.5	2222.8	2861.5	3157.8	2840.1	2038.0
80°	3329.9	2521.3	3290.4	2448.6	3368.4	2569.8	3510.6
85°	3096.7	2895.9	2444.6	2905.3	3079.4	2966.8	2458.3

Photometric test report

Family
Silica® 21 round M

Order number: 51ME43DB4MWA
EAN: 4069025803252

LP number
59826_834

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

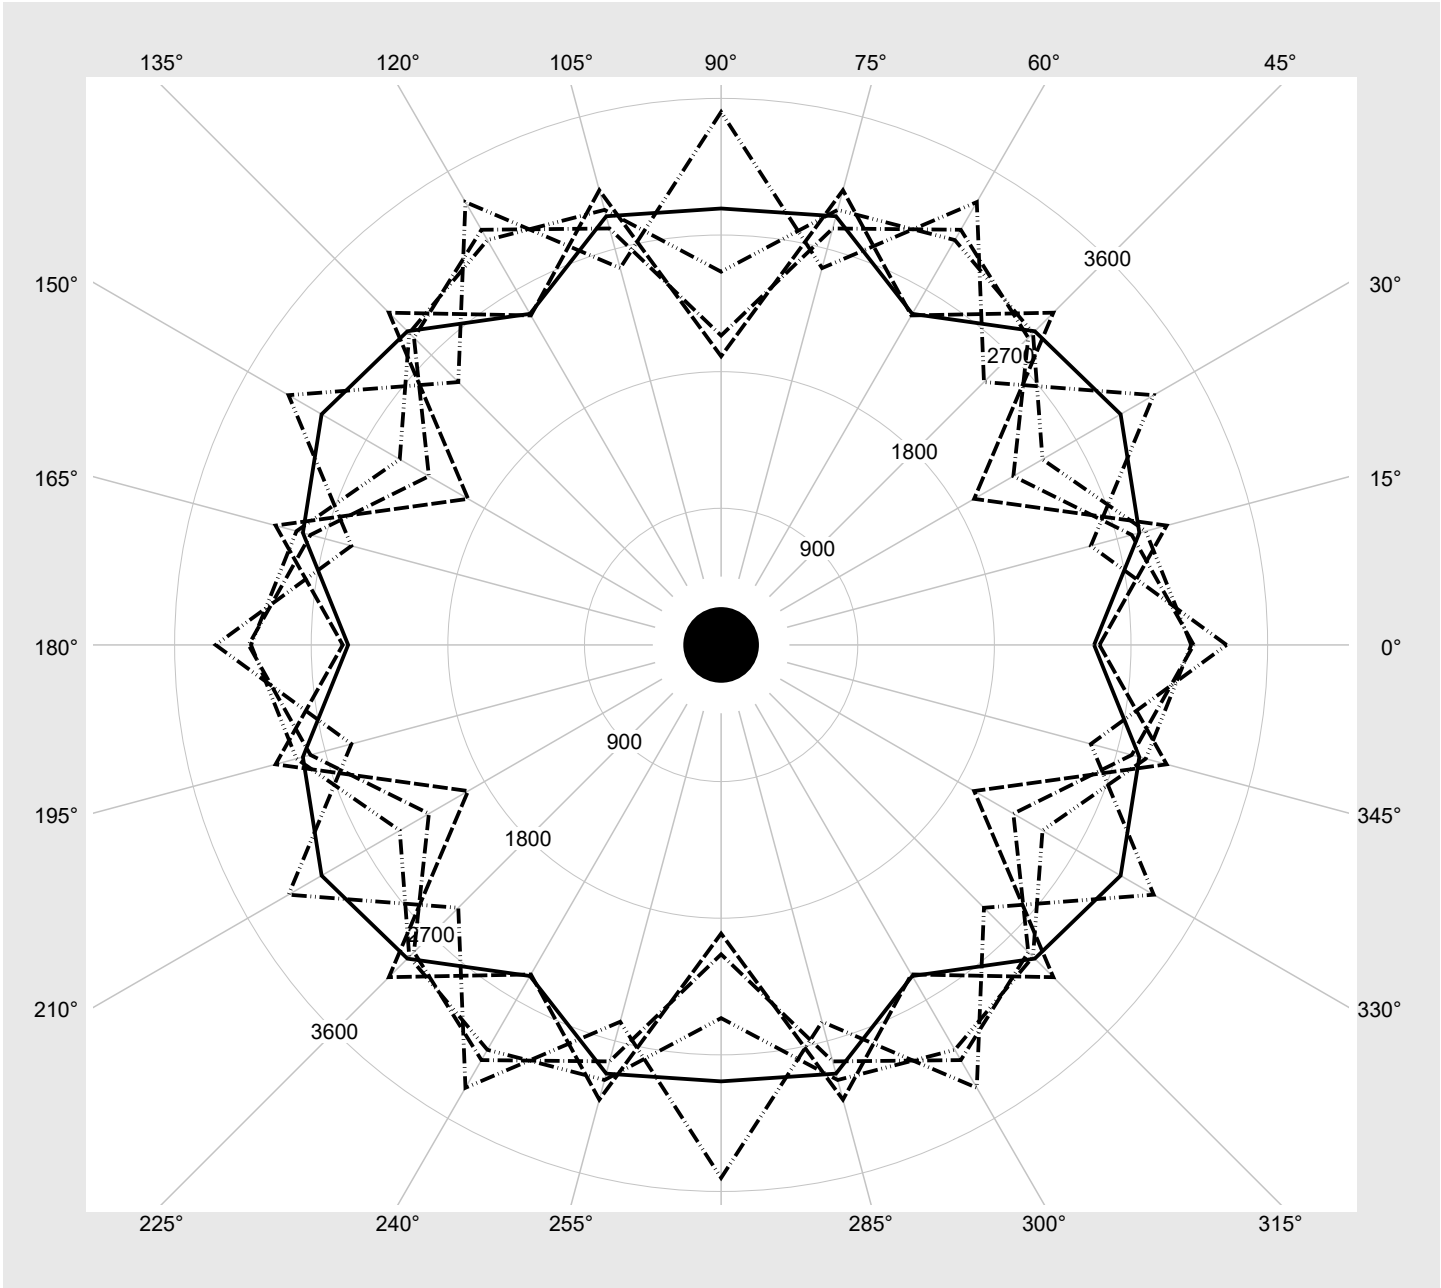

Photometric test report

Family Silica® 21 round M	Order number: 51ME43DB4MWA EAN: 4069025803252	LP number 59826_834
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5560	34.8
95	241	252	5278	33.0
90	228	250	4994	31.3
85	216	248	4733	29.7
80	203	246	4449	28.0
75	190	243	4165	26.3
70	178	241	3903	24.7
65	165	238	3616	23.0
60	152	235	3330	21.3
55	140	232	3065	19.9
50	127	229	2779	18.1
45	115	225	2513	16.5
40	102	221	2224	14.8
35	89	216	1935	13.3
30	77	210	1668	11.8
25	65	204	1401	10.3
20	52	196	1111	8.7
15	40	186	843	6.8
10	27	172	553	4.9
5	15	150	284	3.4
1	6	117	82	2.2