

Photometric test report

Family
Silica® 21 round M

Order number: 51MF21DB4NWA
EAN: 4069025806079

LP number
60073_11

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, cover, opal, direct extremely wide distribution with ceiling illumination, UGR≤22

Lamps LED 4000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 5210 lm
Power consumption = 29.9 W
Luminous efficacy = 174.2 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 362 cd/klm

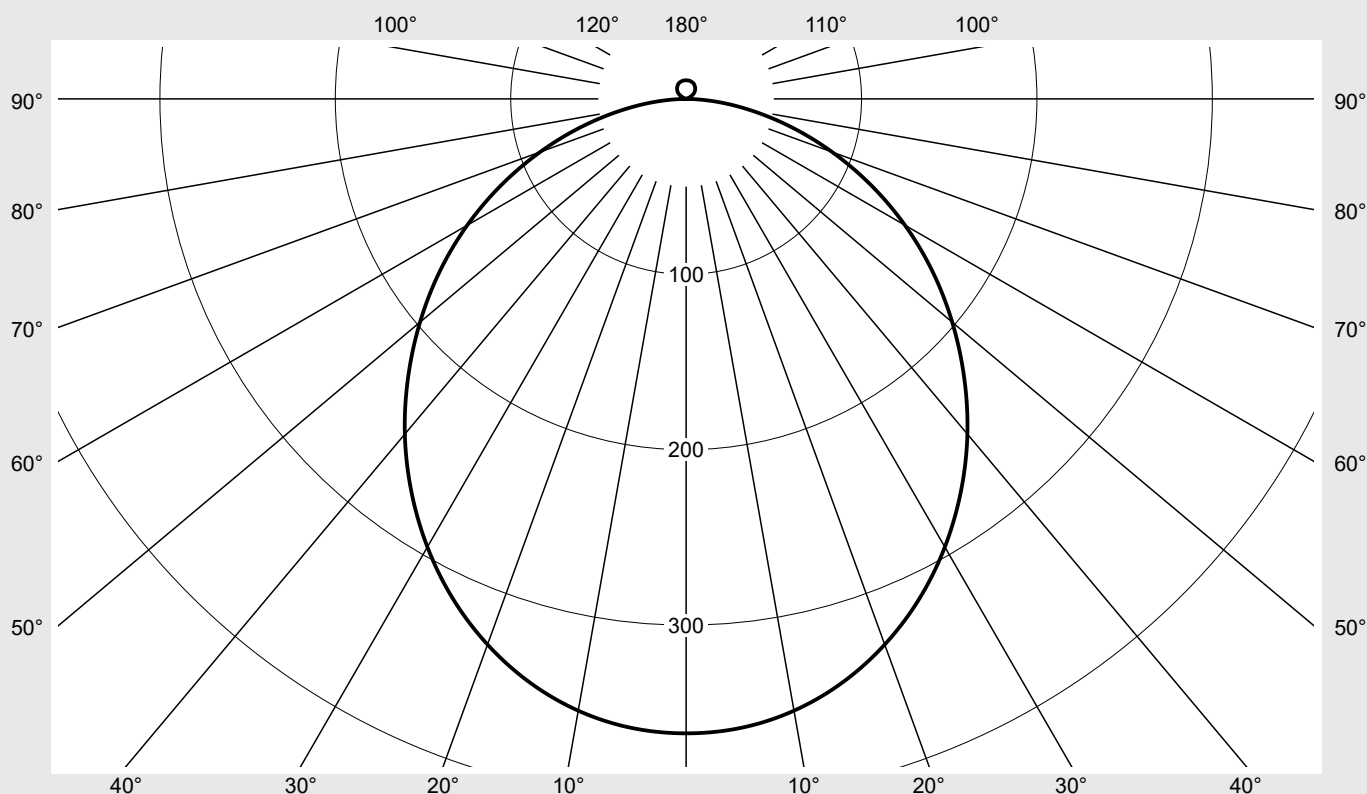

Classifications

DIN 5040 A 4 3
CIE N1=49 N2=79 N3=96
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51MF21DB4NWA EAN: 4069025806079	LP number 60073_11
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	361.7	2.2	2.2
5°	359.9	17.2	19.4
10°	354.2	33.7	53.1
15°	344.4	48.9	101.9
20°	331.1	62.1	164.0
25°	314.5	72.9	236.9
30°	295.0	80.9	317.7
35°	273.1	85.9	403.6
40°	249.5	87.9	491.5
45°	224.1	86.9	578.4
50°	198.0	83.2	661.5
55°	171.5	77.0	738.5
60°	144.1	68.4	806.9
65°	116.3	57.8	864.7
70°	88.6	45.6	910.3
75°	62.0	32.8	943.1
80°	37.4	20.2	963.3
85°	16.0	8.7	972.1
90°	0.1	0.0	972.1
95°	0.2	0.1	972.2
100°	0.5	0.3	972.5
105°	1.0	0.5	973.0
110°	1.6	0.8	973.8
115°	2.4	1.2	975.0
120°	3.8	1.8	976.8
125°	5.3	2.4	979.2
130°	6.4	2.7	981.9
135°	7.2	2.8	984.7
140°	8.0	2.8	987.5
145°	8.7	2.7	990.2
150°	9.3	2.6	992.8
155°	9.8	2.3	995.1
160°	10.1	1.9	997.0
165°	10.3	1.5	998.4
170°	10.5	1.0	999.4
175°	10.6	0.5	999.9
180°	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round M	Order number: 51MF21DB4NWA EAN: 4069025806079	LP number 60073_11
------------------------------	--	-----------------------

UGR-Table		Standard room									siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions		View crosswise (C0)					View endwise (C90)					
x	y											
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7	
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2	
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7	
	6H	21.1	22.4	21.5	22.8	23.1	21.1	22.4	21.5	22.8	23.1	
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3	
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3	
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3	
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9	
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6	
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1	
	8H	22.5	23.3	22.9	23.8	24.2	22.5	23.3	22.9	23.8	24.2	
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3	
8H	4H	22.0	22.9	22.4	23.3	23.8	22.0	22.9	22.4	23.3	23.8	
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4	
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6	
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8	
12H	4H	22.0	22.8	22.5	23.3	23.8	22.0	22.8	22.5	23.3	23.8	
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4	
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7	

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 586
-----------------	---------------------------------	-------------------------------	---------

C-planes		0°
γ	Luminance in cd/m²	
45°	6122.6	
50°	5951.7	
55°	5774.9	
60°	5567.1	
65°	5314.6	
70°	5003.7	
75°	4630.8	
80°	4156.4	
85°	3550.3	

Photometric test report

Family
Silica® 21 round M

Order number: 51MF21DB4NWA
EAN: 4069025806079

LP number
60073_11

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

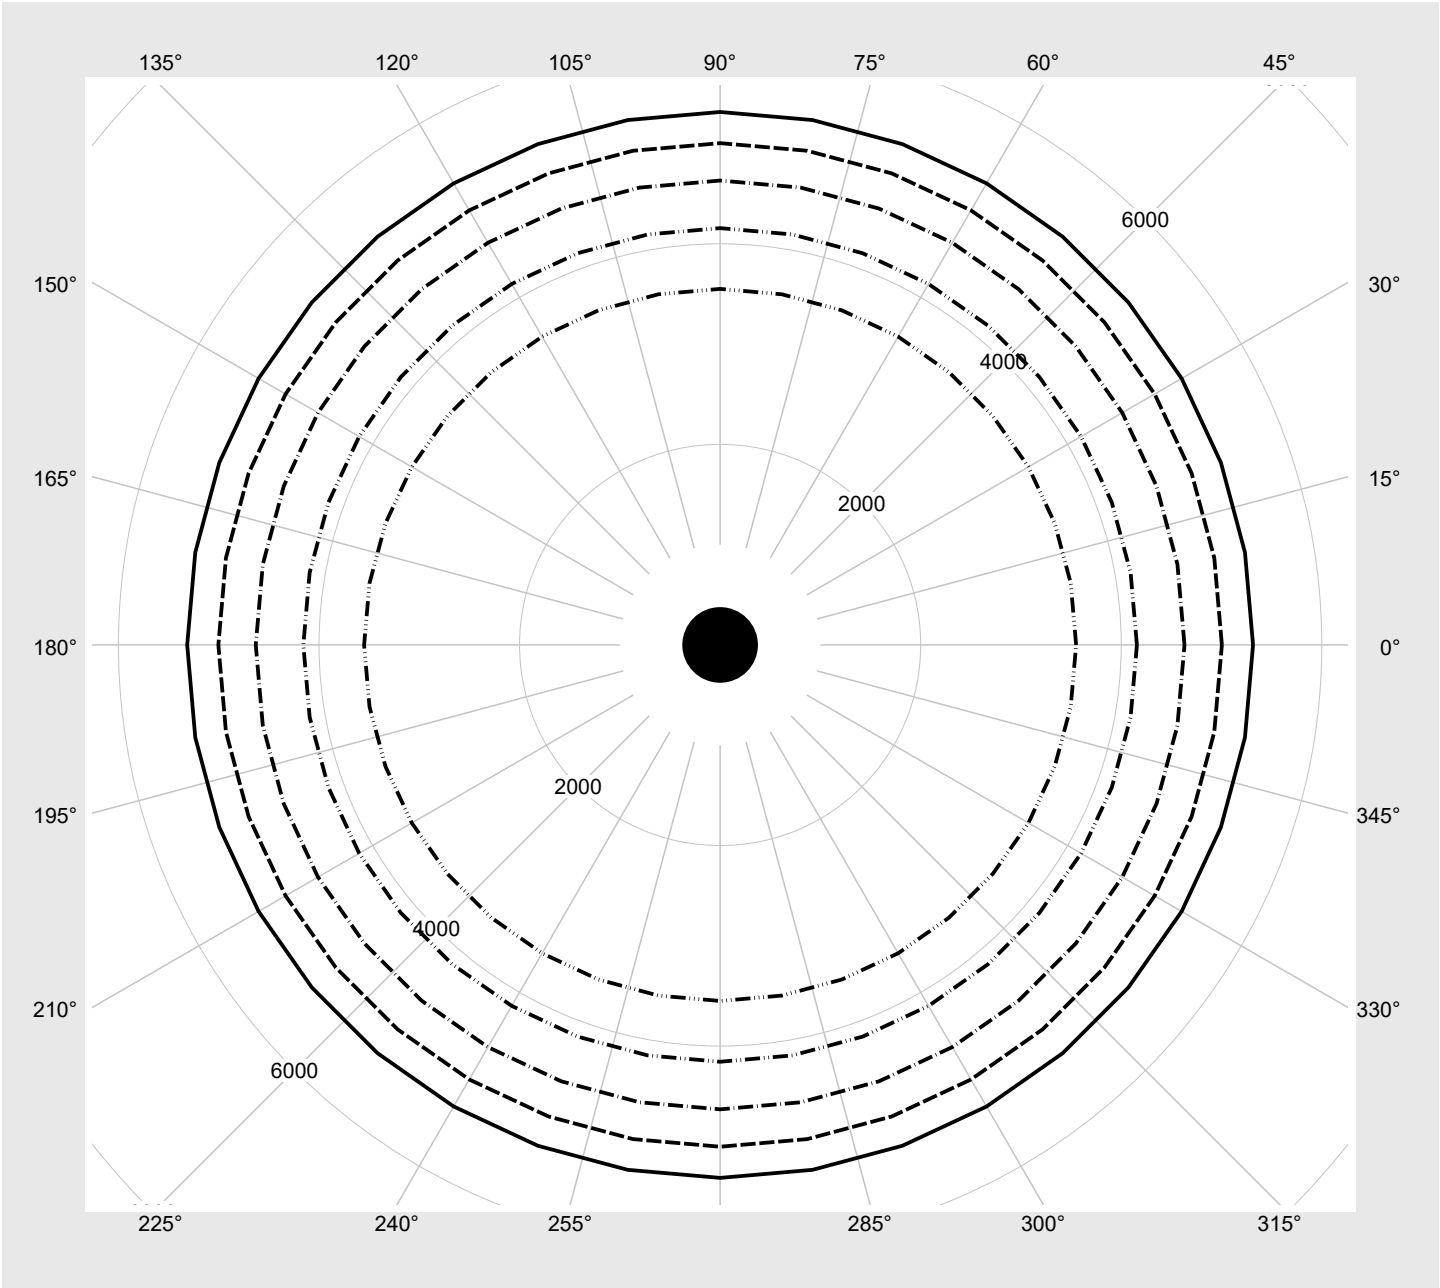

Photometric test report

Family Silica® 21 round M	Order number: 51MF21DB4NWA EAN: 4069025806079	LP number 60073_11
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5210	29.9
95	241	252	4946	28.4
90	228	250	4682	27.0
85	216	248	4437	25.6
80	203	246	4171	24.1
75	190	243	3905	22.6
70	177	241	3637	21.1
65	165	238	3389	19.9
60	152	235	3120	18.4
55	140	232	2871	17.0
50	127	229	2601	15.6
45	115	225	2350	14.3
40	102	221	2078	12.9
35	90	216	1826	11.7
30	77	210	1553	10.3
25	65	204	1300	9.0
20	53	197	1046	7.6
15	40	186	771	5.9
10	28	173	516	4.4
5	16	153	260	3.1
1	7	122	68	2.1