

Photometric test report

Family
Silica® 21 round M

Order number: 51MF21DBENWA
EAN: 4069025806192

LP number
60073_13

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, cover, opal, direct extremely wide distribution with ceiling illumination, UGR≤22

Lamps LED 4000 K | CRI ≥ 90


Controlgear ECG-DALI

Rated values Net luminous flux = 5210 lm
Power consumption = 32.5 W
Luminous efficacy = 160.3 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 362 cd/klm

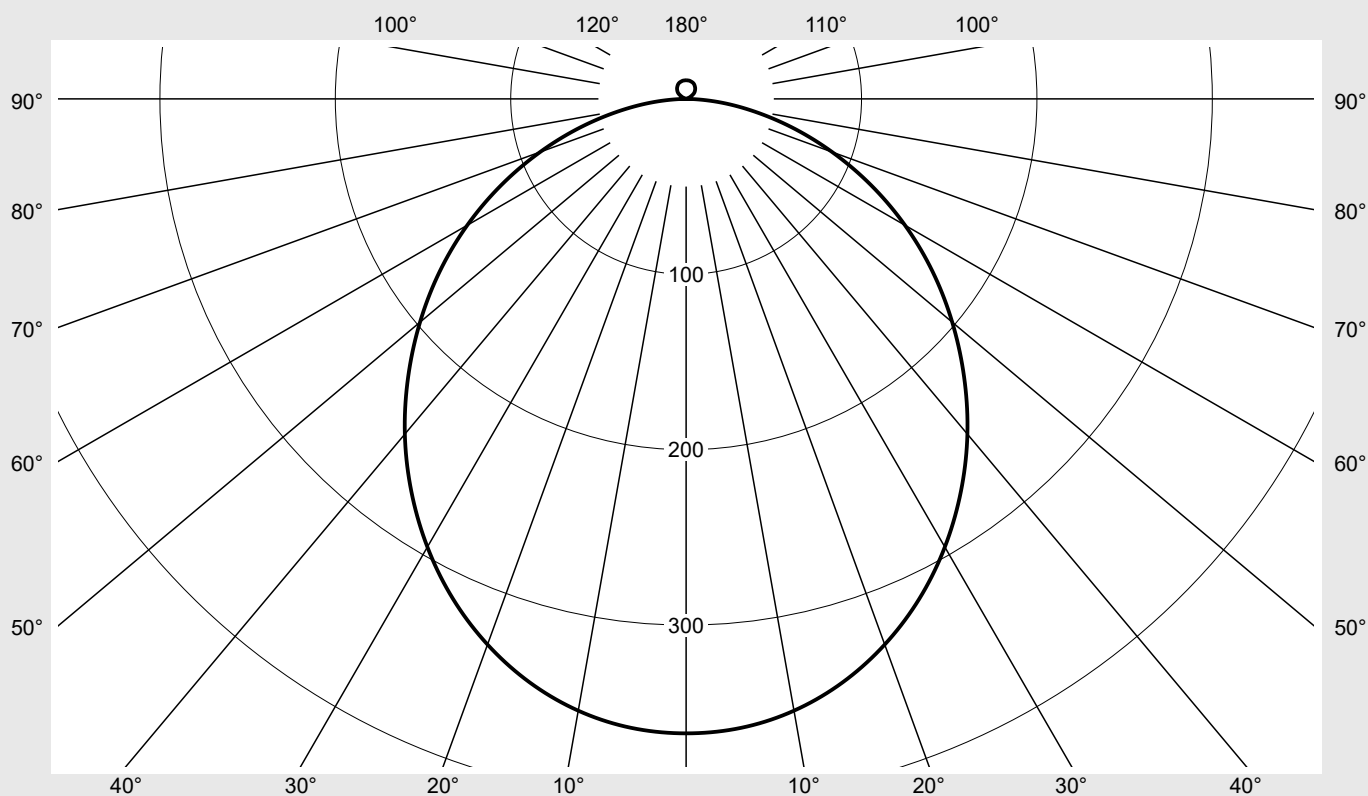

Classifications

DIN 5040 A 4 3
CIE N1=49 N2=79 N3=96
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51MF21DBENWA EAN: 4069025806192	LP number 60073_13
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	361.7	2.2	2.2
5°	359.9	17.2	19.4
10°	354.2	33.7	53.1
15°	344.4	48.9	101.9
20°	331.1	62.1	164.0
25°	314.5	72.9	236.9
30°	295.0	80.9	317.7
35°	273.1	85.9	403.6
40°	249.5	87.9	491.5
45°	224.1	86.9	578.4
50°	198.0	83.2	661.5
55°	171.5	77.0	738.5
60°	144.1	68.4	806.9
65°	116.3	57.8	864.7
70°	88.6	45.6	910.3
75°	62.0	32.8	943.1
80°	37.4	20.2	963.3
85°	16.0	8.7	972.1
90°	0.1	0.0	972.1
95°	0.2	0.1	972.2
100°	0.5	0.3	972.5
105°	1.0	0.5	973.0
110°	1.6	0.8	973.8
115°	2.4	1.2	975.0
120°	3.8	1.8	976.8
125°	5.3	2.4	979.2
130°	6.4	2.7	981.9
135°	7.2	2.8	984.7
140°	8.0	2.8	987.5
145°	8.7	2.7	990.2
150°	9.3	2.6	992.8
155°	9.8	2.3	995.1
160°	10.1	1.9	997.0
165°	10.3	1.5	998.4
170°	10.5	1.0	999.4
175°	10.6	0.5	999.9
180°	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round M	Order number: 51MF21DBENWA EAN: 4069025806192	LP number 60073_13
------------------------------	--	-----------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.8	23.1	21.1	22.4	21.5	22.8	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.5	23.3	22.9	23.8	24.2	22.5	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.9	22.4	23.3	23.8	22.0	22.9	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.8	22.0	22.8	22.5	23.3	23.8
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 586
-----------------	---------------------------------	-------------------------------	---------

C-planes		0°
γ	Luminance in cd/m²	
45°	6122.6	
50°	5951.7	
55°	5774.9	
60°	5567.1	
65°	5314.6	
70°	5003.7	
75°	4630.8	
80°	4156.4	
85°	3550.3	

Photometric test report

Family
Silica® 21 round M

Order number: 51MF21DBENWA
EAN: 4069025806192

LP number
60073_13

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

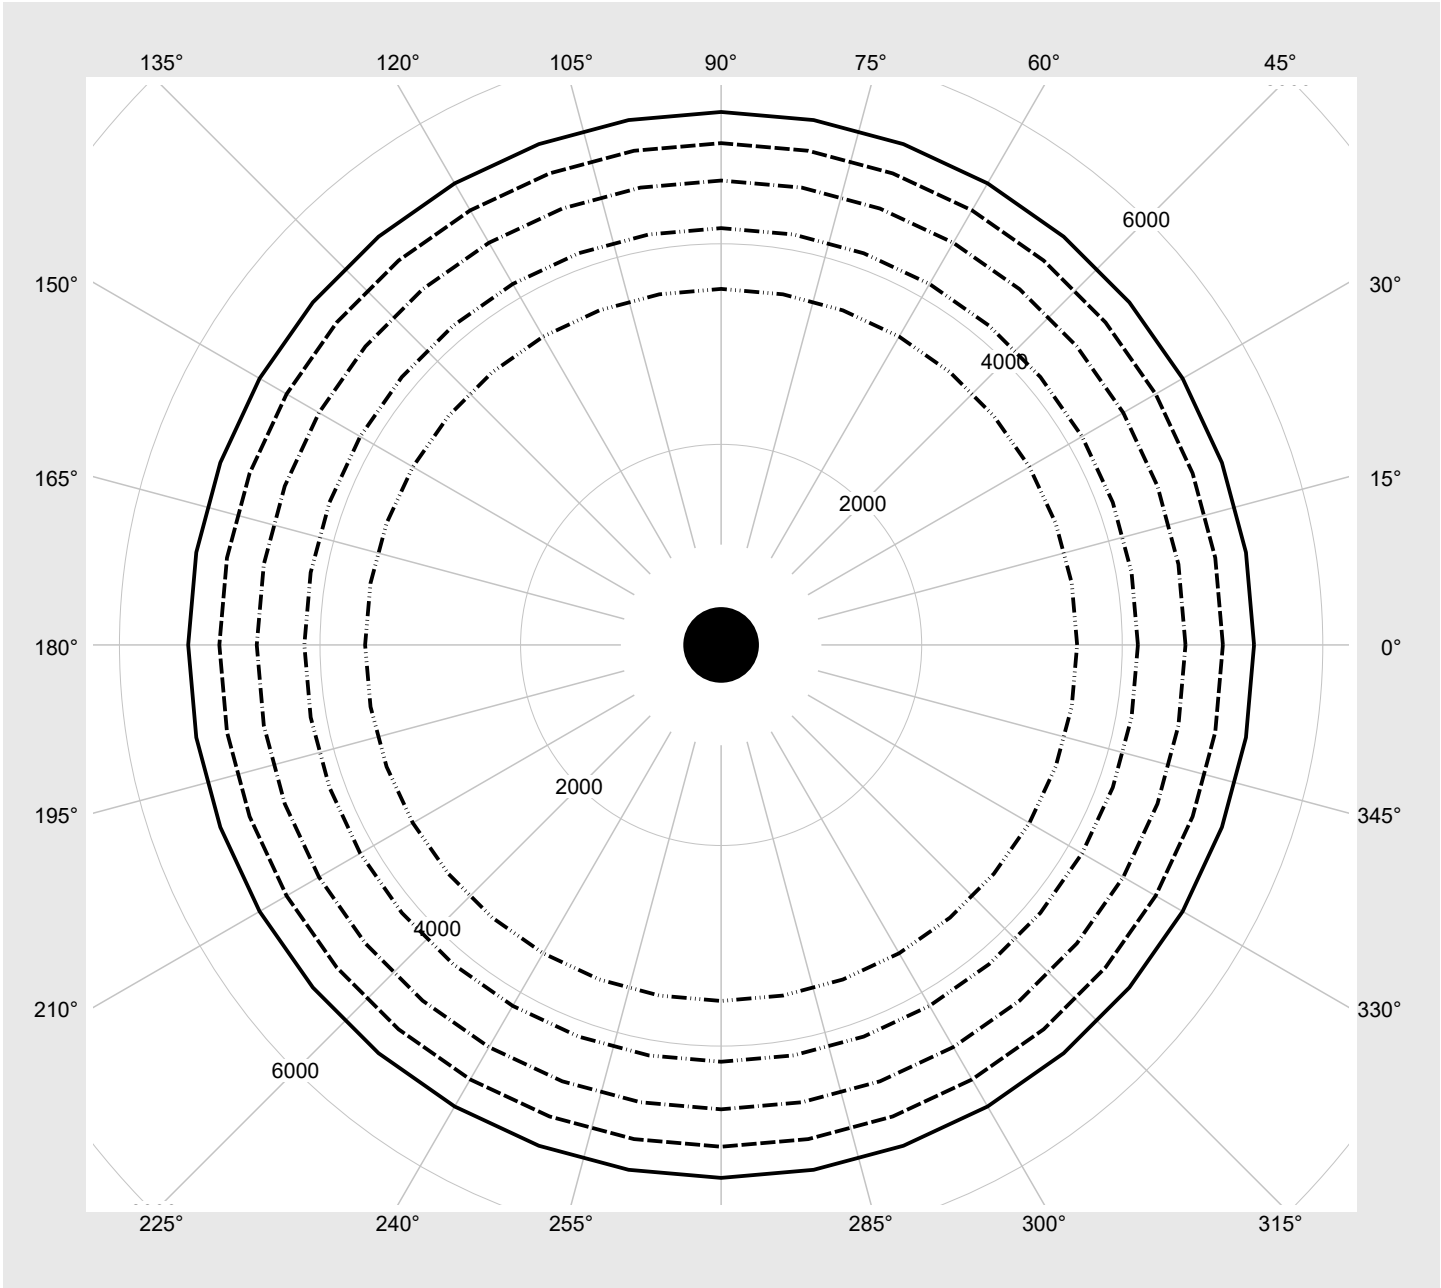

Photometric test report

Family Silica® 21 round M	Order number: 51MF21DBENWA EAN: 4069025806192	LP number 60073_13
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5210	32.5
95	241	252	4952	30.9
90	228	250	4694	29.3
85	215	248	4434	27.6
80	202	246	4173	26.0
75	189	243	3912	24.4
70	176	241	3648	22.8
65	163	238	3384	21.2
60	150	235	3119	19.6
55	138	232	2873	18.1
50	125	228	2606	16.5
45	112	224	2339	14.9
40	100	220	2090	13.6
35	87	215	1819	12.2
30	75	209	1569	10.7
25	62	202	1298	9.2
20	50	194	1046	7.7
15	37	183	773	5.9
10	25	169	519	4.3
5	13	145	265	2.9
3	7	122	137	2.1