


Photometric test report

Family Silica® 21 round M	Order number: 51MF31DB4NWA EAN: 4069025807519	LP number 60083_5
	Version	Suspended luminaire, housing, white, cover, opal, direct-/ indirect distribution, extremely wide distribution, UGR≤22
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 7210 lm Power consumption = 40.3 W Luminous efficacy = 178.9 lm/W
		serial documentation 20.05.2026
		siteco

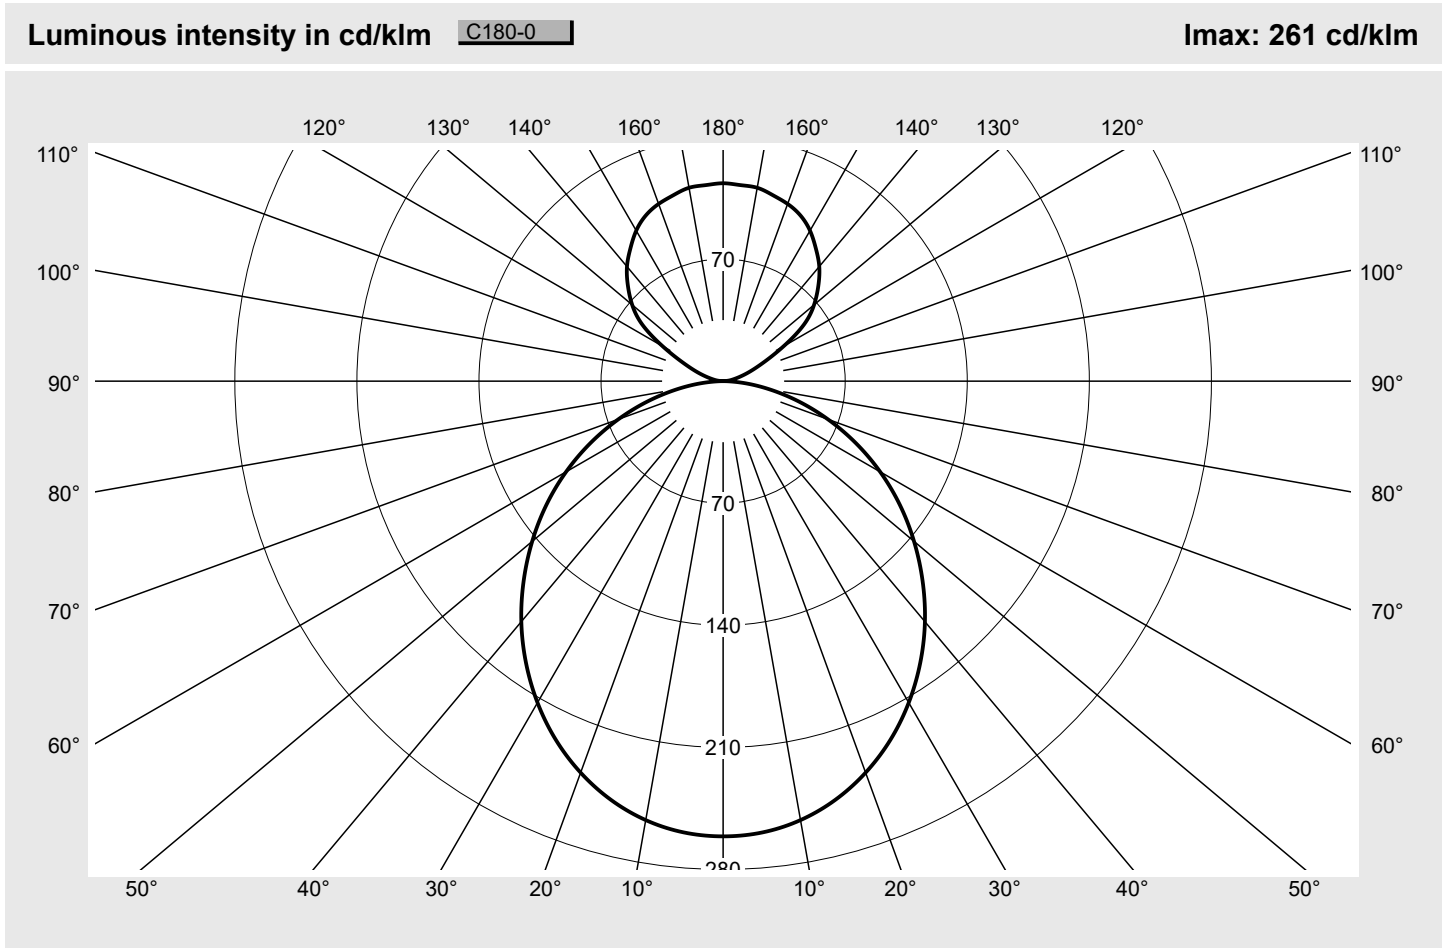

Classifications		Luminaire light output ratios	
DIN 5040	B 4 3	η_{LB}	100.0%
CIE	N1=49 N2=79 N3=96	ϕ_u	70.2%
	N4=70 N5=100	ϕ_o	29.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51MF31DB4NWA EAN: 4069025807519	LP number 60083_5
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	261.0	1.6	1.6
5°	259.7	12.4	14.0
10°	255.6	24.3	38.3
15°	248.6	35.3	73.6
20°	238.9	44.8	118.3
25°	227.0	52.6	170.9
30°	212.9	58.3	229.3
35°	197.1	62.0	291.2
40°	180.0	63.4	354.7
45°	161.7	62.7	417.3
50°	142.9	60.0	477.4
55°	123.7	55.6	532.9
60°	104.0	49.4	582.3
65°	83.9	41.7	623.9
70°	63.9	32.9	656.9
75°	44.8	23.7	680.6
80°	27.0	14.6	695.1
85°	11.6	6.3	701.4
90°	0.6	0.3	701.8
95°	2.6	1.4	703.2
100°	5.8	3.1	706.3
105°	10.2	5.4	711.8
110°	16.8	8.7	720.4
115°	26.0	12.9	733.3
120°	40.1	19.0	752.4
125°	56.6	25.4	777.8
130°	68.1	28.6	806.4
135°	77.2	29.9	836.3
140°	85.8	30.2	866.5
145°	92.8	29.2	895.7
150°	99.6	27.3	923.0
155°	104.9	24.3	947.3
160°	108.1	20.3	967.6
165°	110.4	15.7	983.2
170°	112.6	10.7	993.9
175°	112.9	5.4	999.3
180°	113.5	0.7	1000.0

Photometric test report

Family Silica® 21 round M			Order number: 51MF31DB4NWA EAN: 4069025807519							LP number 60083_5	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.5	17.7	17.2	18.4	19.3	16.5	17.7	17.2	18.4	19.3
	3H	18.0	19.0	18.7	19.8	20.7	18.0	19.0	18.7	19.8	20.7
	4H	18.6	19.5	19.3	20.3	21.3	18.6	19.5	19.3	20.3	21.3
	6H	19.0	19.9	19.8	20.7	21.7	19.0	19.9	19.8	20.7	21.7
	8H	19.1	19.9	19.9	20.7	21.7	19.1	19.9	19.9	20.7	21.7
	12H	19.2	20.0	20.0	20.8	21.8	19.2	20.0	20.0	20.8	21.8
4H	2H	17.1	18.1	17.9	18.9	19.8	17.1	18.1	17.9	18.9	19.8
	3H	18.8	19.6	19.6	20.4	21.4	18.8	19.6	19.6	20.4	21.4
	4H	19.5	20.2	20.3	21.1	22.1	19.5	20.2	20.3	21.1	22.1
	6H	20.1	20.7	20.9	21.6	22.6	20.1	20.7	20.9	21.6	22.6
	8H	20.2	20.8	21.0	21.6	22.7	20.2	20.8	21.0	21.6	22.7
	12H	20.4	20.9	21.2	21.7	22.8	20.4	20.9	21.2	21.7	22.8
8H	4H	19.7	20.3	20.6	21.2	22.2	19.7	20.3	20.6	21.2	22.2
	6H	20.4	20.9	21.2	21.7	22.8	20.4	20.9	21.2	21.7	22.8
	8H	20.7	21.1	21.5	22.0	23.1	20.7	21.1	21.5	22.0	23.1
	12H	20.9	21.3	21.8	22.2	23.2	20.9	21.3	21.8	22.2	23.2
12H	4H	19.8	20.3	20.6	21.2	22.2	19.8	20.3	20.6	21.2	22.2
	6H	20.5	20.9	21.4	21.8	22.9	20.5	20.9	21.4	21.8	22.9
	8H	20.8	21.2	21.7	22.0	23.1	20.8	21.2	21.7	22.0	23.1

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 586
C-planes	0°		
γ	Luminance in cd/m²		
45°	6114.1		
50°	5943.5		
55°	5766.9		
60°	5559.4		
65°	5307.2		
70°	4996.9		
75°	4624.5		
80°	4150.6		
85°	3545.8		

Photometric test report

Family
Silica® 21 round M

Order number: 51MF31DB4NWA
EAN: 4069025807519

LP number
60083_5

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

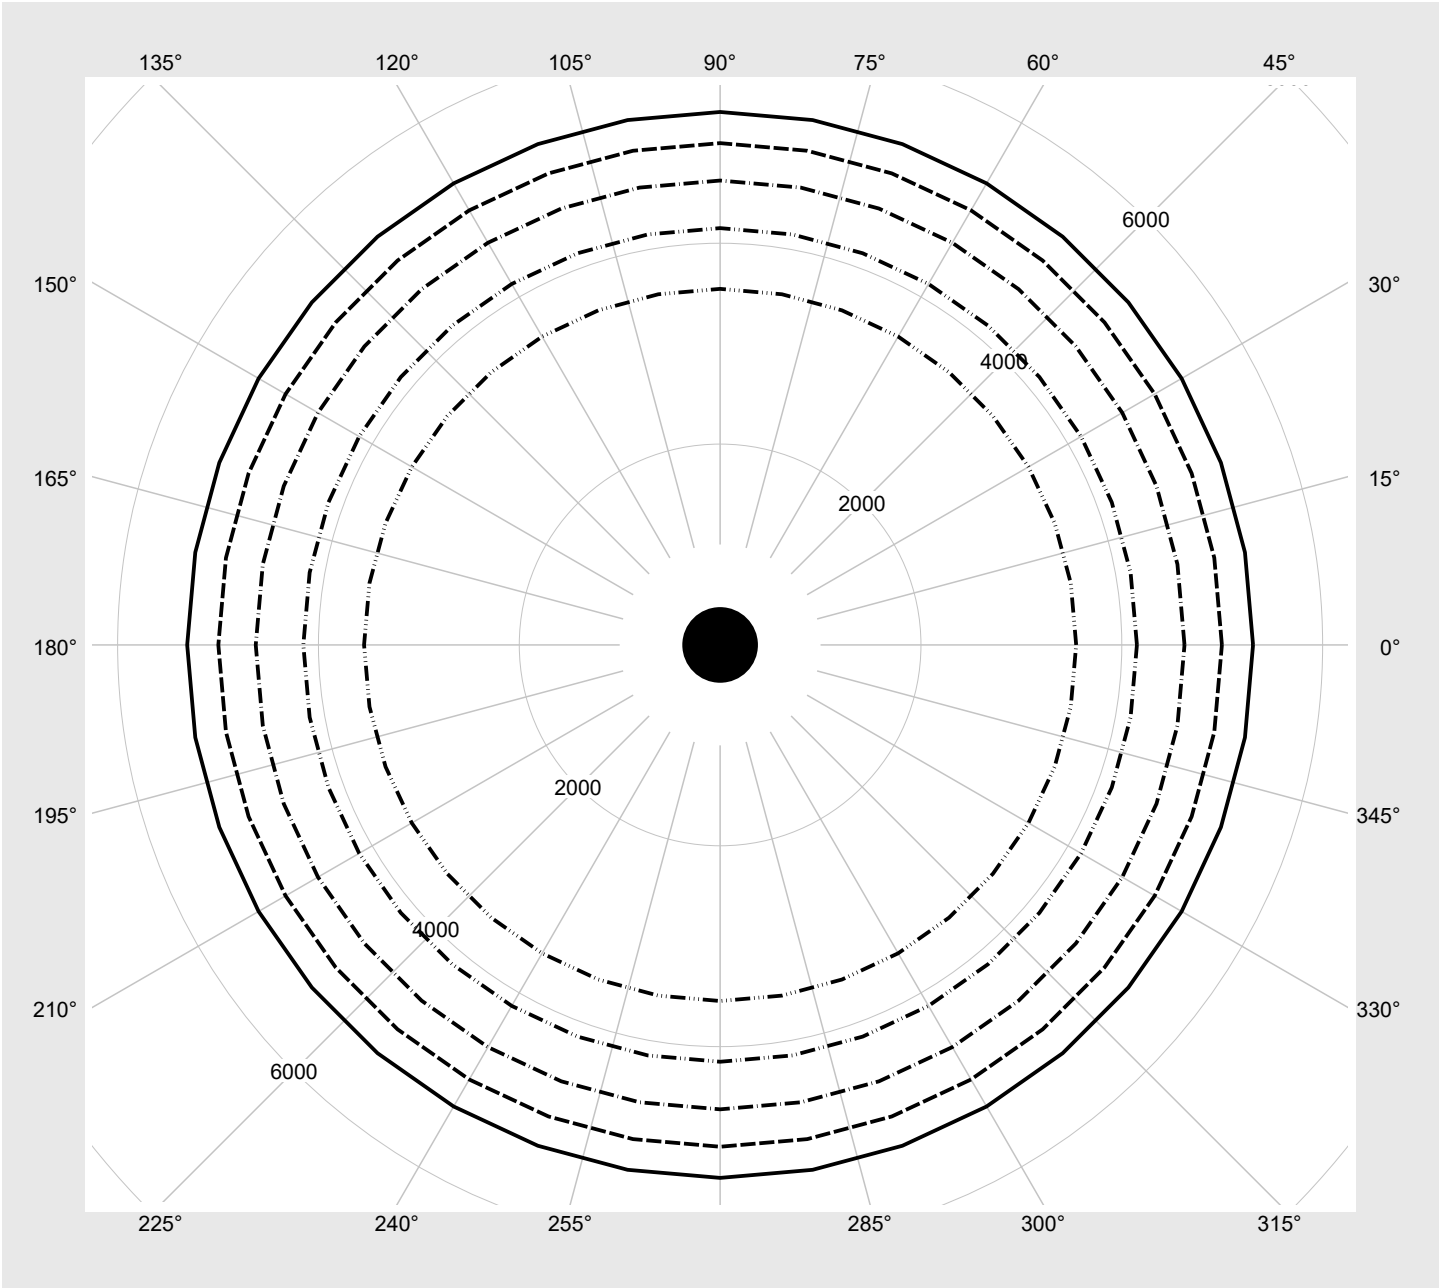

Photometric test report

Family Silica® 21 round M	Order number: 51MF31DB4NWA EAN: 4069025807519	LP number 60083_5
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	7210	40.3
95	241	252	6845	38.3
90	228	250	6479	36.4
85	216	248	6140	34.6
80	203	246	5771	32.6
75	190	243	5402	30.7
70	178	241	5060	28.8
65	165	238	4688	26.8
60	152	235	4315	24.8
55	140	232	3970	22.9
50	127	229	3596	20.8
45	115	225	3249	19.0
40	102	221	2873	16.9
35	90	216	2524	15.1
30	78	211	2175	13.3
25	65	204	1794	11.4
20	53	197	1443	9.5
15	41	187	1091	7.5
10	28	173	708	4.9
5	16	153	354	2.4
2	8	127	118	1.0