

Photometric test report

Family
Silica® 21 round S

Order number: 51MF33DA4MSA
EAN: 4069025807977

LP number
60076_5

serial
documentation
20.05.2026



Version Suspended luminaire, housing, silver,
microprismatic optics, direct-/ indirect
distribution, wide distribution, UGR≤19

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 3820 lm
Power consumption = 24.4 W
Luminous efficacy = 156.6 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 307 cd/klm

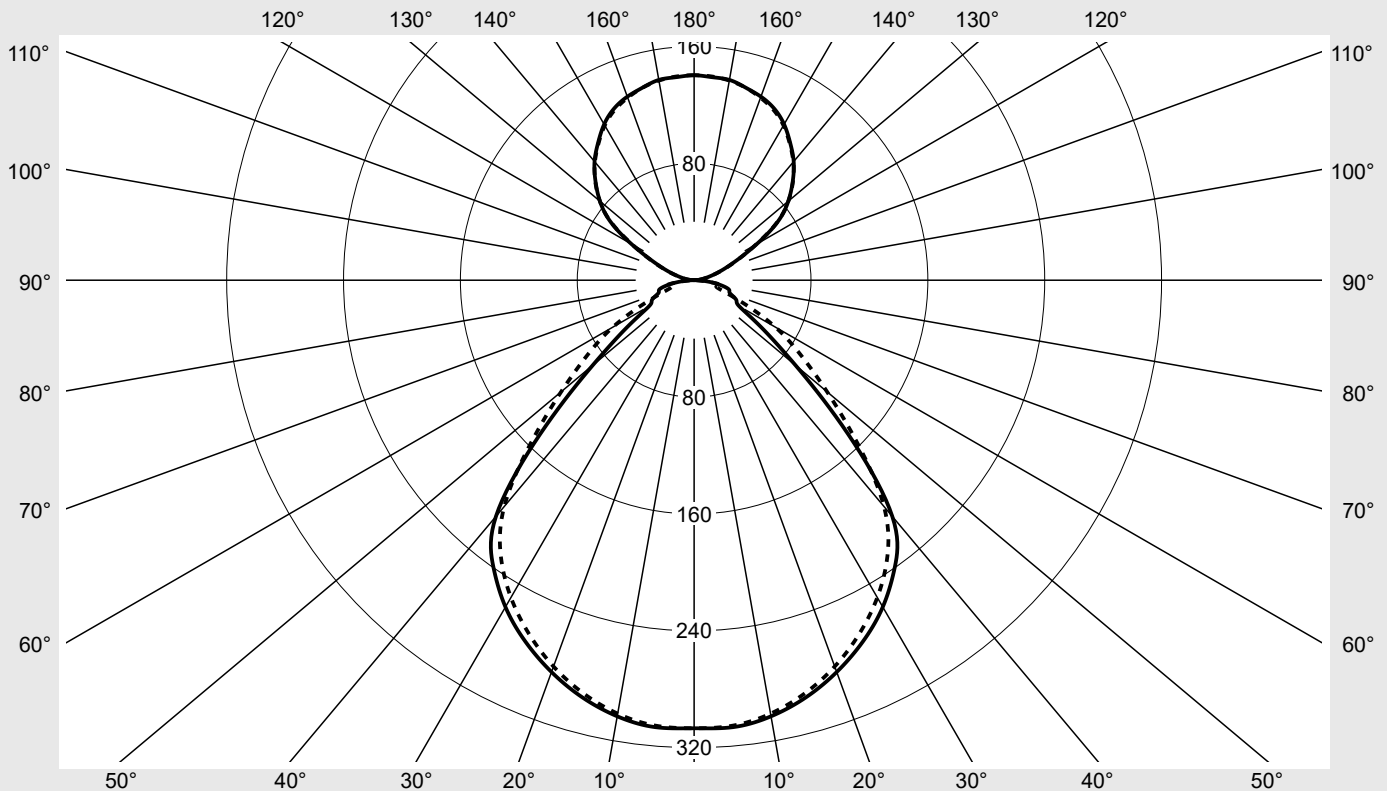

Classifications

DIN 5040 B 5 3
CIE N1=64 N2=89 N3=97
N4=63 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 63.1%
 ϕ_o 36.9%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51MF33DA4MSA EAN: 4069025807977	LP number 60076_5
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	306.7	306.7	306.7	306.7	306.7	306.7	306.7	1.8	1.8
5°	307.1	305.5	303.8	304.8	306.3	306.1	306.1	14.6	16.4
10°	303.1	301.5	299.5	300.3	301.6	301.3	301.3	28.7	45.1
15°	295.7	294.0	291.8	292.4	293.3	292.9	292.8	41.6	86.7
20°	285.4	283.8	281.3	281.4	282.0	281.5	281.4	52.9	139.6
25°	273.1	271.2	268.2	268.0	268.6	267.8	267.3	62.3	201.9
30°	258.3	256.0	252.5	252.3	253.1	251.8	250.8	69.4	271.3
35°	239.6	237.4	233.1	233.4	233.9	232.6	230.7	73.6	345.0
40°	211.1	211.1	207.3	207.0	203.6	204.6	202.2	72.8	417.8
45°	149.2	158.8	161.1	158.0	144.2	157.7	158.5	60.3	478.1
50°	90.7	104.0	121.5	104.0	90.1	102.4	118.8	43.9	522.0
55°	55.9	63.9	90.5	63.6	55.4	62.2	89.0	30.5	552.5
60°	35.6	43.1	63.5	43.6	35.5	42.6	64.3	22.0	574.6
65°	31.8	36.9	39.3	37.8	32.6	37.8	37.2	18.1	592.7
70°	26.1	31.8	20.1	32.4	26.2	32.5	19.9	14.3	606.9
75°	24.7	22.2	17.6	22.7	25.0	22.5	16.1	11.5	618.4
80°	17.7	13.4	17.5	13.0	17.9	13.7	18.7	8.4	626.9
85°	8.3	7.7	6.5	7.8	8.2	7.9	6.6	4.1	631.0
90°	0.8	1.0	0.6	0.9	0.6	0.7	0.4	0.4	631.4
95°	3.2	3.1	3.1	3.0	3.1	3.1	3.1	1.7	633.1
100°	7.2	7.0	7.0	7.1	7.2	7.2	7.2	3.8	636.9
105°	12.7	12.5	12.7	12.8	12.9	12.8	12.9	6.8	643.7
110°	20.8	20.7	21.0	21.2	21.2	21.2	21.2	10.8	654.6
115°	32.1	32.1	32.3	32.5	32.7	32.8	32.7	16.1	670.7
120°	49.6	49.4	49.2	49.2	49.1	49.1	49.0	23.4	694.0
125°	70.0	69.8	69.8	69.7	70.1	70.1	69.7	31.4	725.4
130°	84.2	84.0	84.2	84.5	85.0	84.6	84.2	35.4	760.9
135°	95.4	95.5	95.8	96.4	96.4	95.9	95.7	37.2	798.0
140°	106.1	105.8	105.9	106.2	106.1	105.8	105.6	37.3	835.4
145°	114.7	114.8	115.0	114.9	114.6	114.5	114.2	36.1	871.4
150°	123.2	123.2	123.2	122.9	122.6	122.6	122.3	33.7	905.1
155°	129.7	129.3	129.0	128.7	128.6	128.6	128.6	29.9	935.0
160°	133.7	133.4	133.1	132.8	133.1	132.7	132.9	24.9	959.9
165°	136.5	136.5	136.4	136.5	136.4	136.1	136.4	19.3	979.3
170°	139.2	139.2	139.1	138.8	138.4	138.6	138.7	13.2	992.5
175°	139.5	139.6	139.6	139.8	139.8	139.9	140.0	6.7	999.2
180°	140.3	140.3	140.3	140.3	140.3	140.3	140.3	0.8	1000.0

Photometric test report

Family Silica® 21 round S	Order number: 51MF33DA4MSA EAN: 4069025807977	LP number 60076_5
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	14.4	15.4	15.2	16.2	17.3	14.2	15.2	15.0	16.0	17.1
	3H	15.0	15.9	15.8	16.7	17.8	14.8	15.7	15.7	16.6	17.6
	4H	15.4	16.3	16.3	17.1	18.2	15.1	16.0	16.0	16.8	17.9
	6H	15.9	16.6	16.8	17.5	18.6	15.6	16.3	16.4	17.2	18.3
	8H	16.0	16.7	16.9	17.6	18.7	15.7	16.4	16.6	17.3	18.4
	12H	16.1	16.8	17.0	17.7	18.8	15.9	16.5	16.7	17.4	18.5
4H	2H	14.5	15.3	15.4	16.2	17.3	14.4	15.2	15.2	16.1	17.1
	3H	15.3	16.0	16.2	16.8	17.9	15.3	16.0	16.2	16.8	17.9
	4H	15.8	16.4	16.7	17.3	18.4	15.8	16.4	16.7	17.3	18.4
	6H	16.4	16.9	17.3	17.8	19.0	16.3	16.9	17.2	17.8	18.9
	8H	16.5	17.0	17.5	17.9	19.1	16.5	17.0	17.4	17.9	19.1
	12H	16.8	17.2	17.7	18.1	19.3	16.7	17.1	17.7	18.1	19.2
8H	4H	15.9	16.4	16.9	17.3	18.5	15.9	16.4	16.8	17.3	18.5
	6H	16.7	17.0	17.6	18.0	19.2	16.6	17.0	17.6	18.0	19.2
	8H	17.0	17.4	18.0	18.3	19.5	17.0	17.4	18.0	18.3	19.5
	12H	17.3	17.6	18.3	18.6	19.8	17.3	17.6	18.3	18.6	19.8
12H	4H	16.0	16.4	16.9	17.3	18.5	16.0	16.4	16.9	17.3	18.5
	6H	16.8	17.1	17.7	18.1	19.3	16.8	17.1	17.7	18.0	19.2
	8H	17.2	17.5	18.1	18.4	19.6	17.2	17.5	18.1	18.4	19.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 386	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6890.1	7333.3	7439.1	7296.1	6658.5	7281.9	7316.1
50°	4605.6	5283.7	6169.0	5280.6	4575.1	5199.9	6035.4
55°	3181.2	3634.4	5150.2	3618.5	3152.0	3539.9	5064.8
60°	2324.9	2816.8	4147.1	2847.7	2317.8	2779.8	4196.0
65°	2454.9	2849.8	3036.4	2920.0	2516.2	2921.1	2872.5
70°	2490.1	3035.8	1923.1	3092.6	2504.1	3098.5	1899.6
75°	3110.3	2798.1	2221.1	2859.1	3155.2	2837.8	2036.3
80°	3327.2	2519.4	3287.7	2446.5	3365.7	2567.7	3507.7
85°	3094.1	2893.4	2442.8	2903.1	3077.3	2964.1	2455.9

Photometric test report

Family Silica® 21 round S	Order number: 51MF33DA4MSA EAN: 4069025807977	LP number 60076_5
--	--	------------------------------------

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

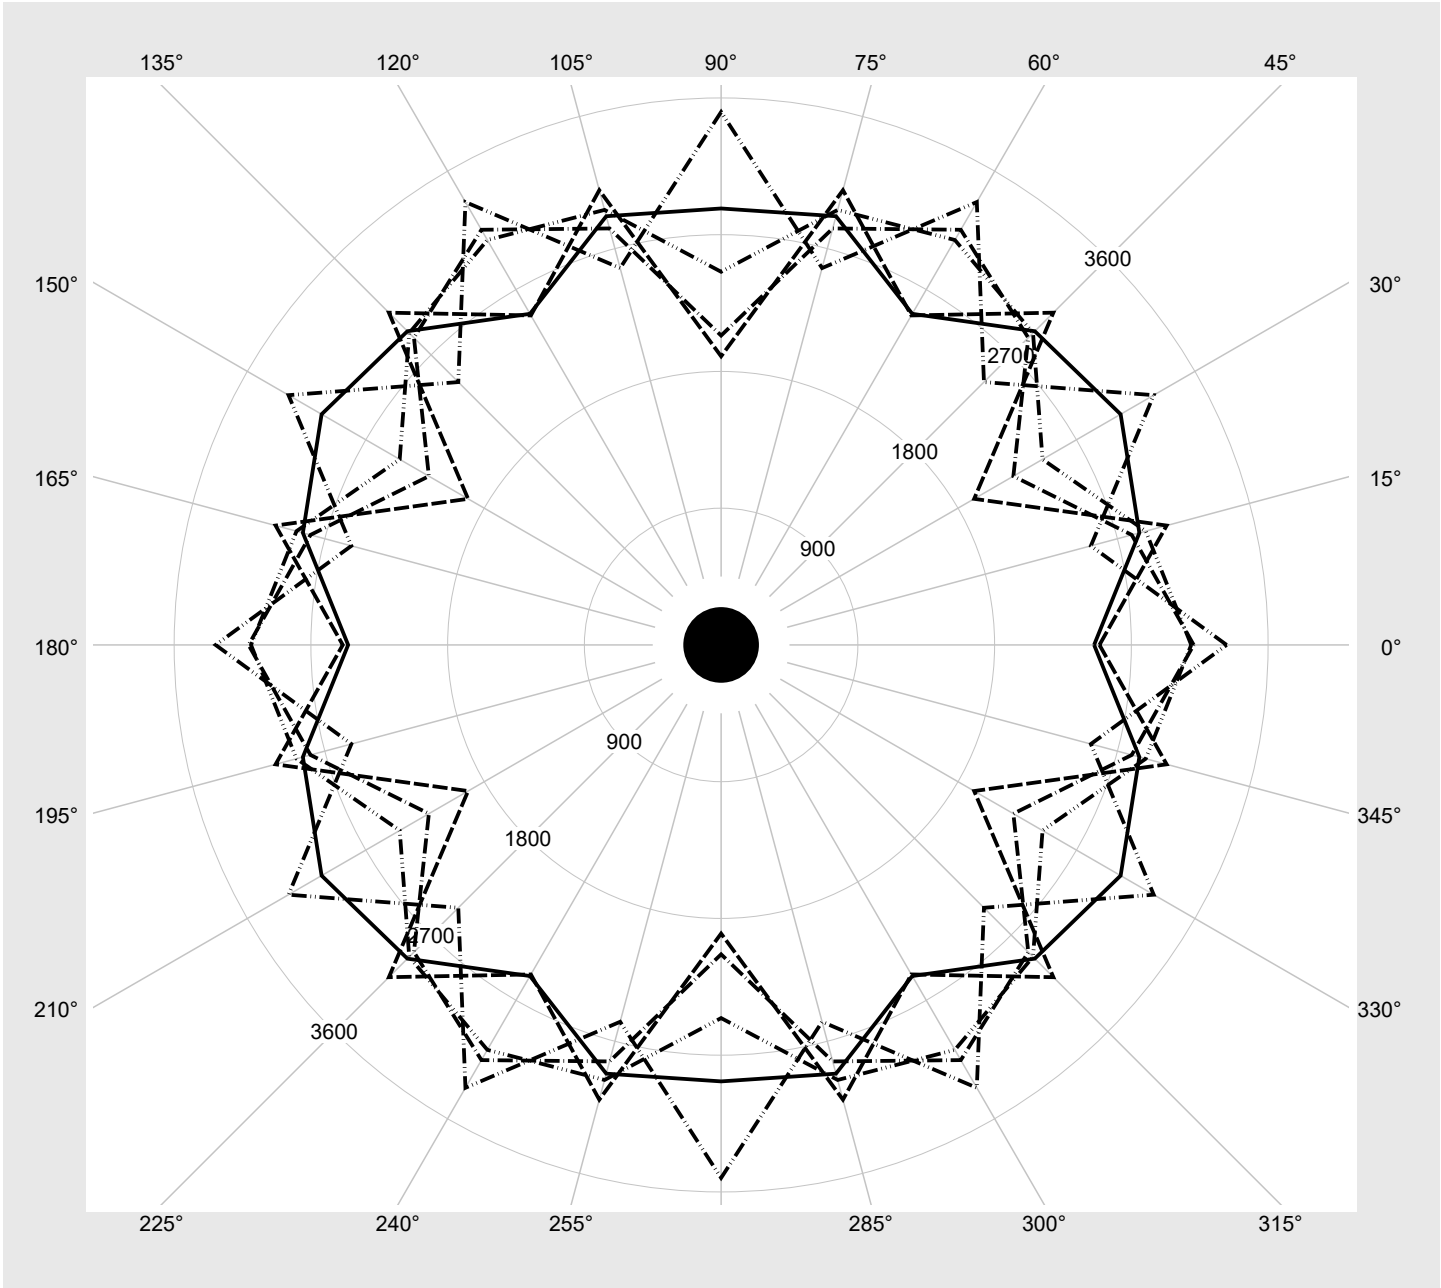

Photometric test report

Family Silica® 21 round S	Order number: 51MF33DA4MSA EAN: 4069025807977	LP number 60076_5
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	3820	24.4
95	241	252	3629	23.2
90	228	250	3437	22.0
85	215	248	3244	20.7
80	202	246	3051	19.5
75	190	243	2871	18.4
70	177	241	2677	17.3
65	164	238	2481	16.1
60	152	235	2299	15.0
55	139	232	2103	13.8
50	126	228	1905	12.6
45	114	225	1722	11.4
40	101	220	1523	10.2
35	89	216	1338	9.1
30	76	210	1138	7.9
25	64	204	953	6.8
20	52	196	767	5.7
15	40	186	580	4.6
10	27	172	377	3.3
5	15	150	188	2.0
2	9	132	94	1.3