

Photometric test report

Family
Silica® 21 round M

Order number: 51MF33DB3MBA
EAN: 4069025808141

LP number
60081_4

serial
documentation
20.05.2026



Version Suspended luminaire, housing, black,
microprismatic optics, direct-/ indirect
distribution, wide distribution, UGR≤19

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 8230 lm
Power consumption = 50.3 W
Luminous efficacy = 163.6 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 329 cd/klm

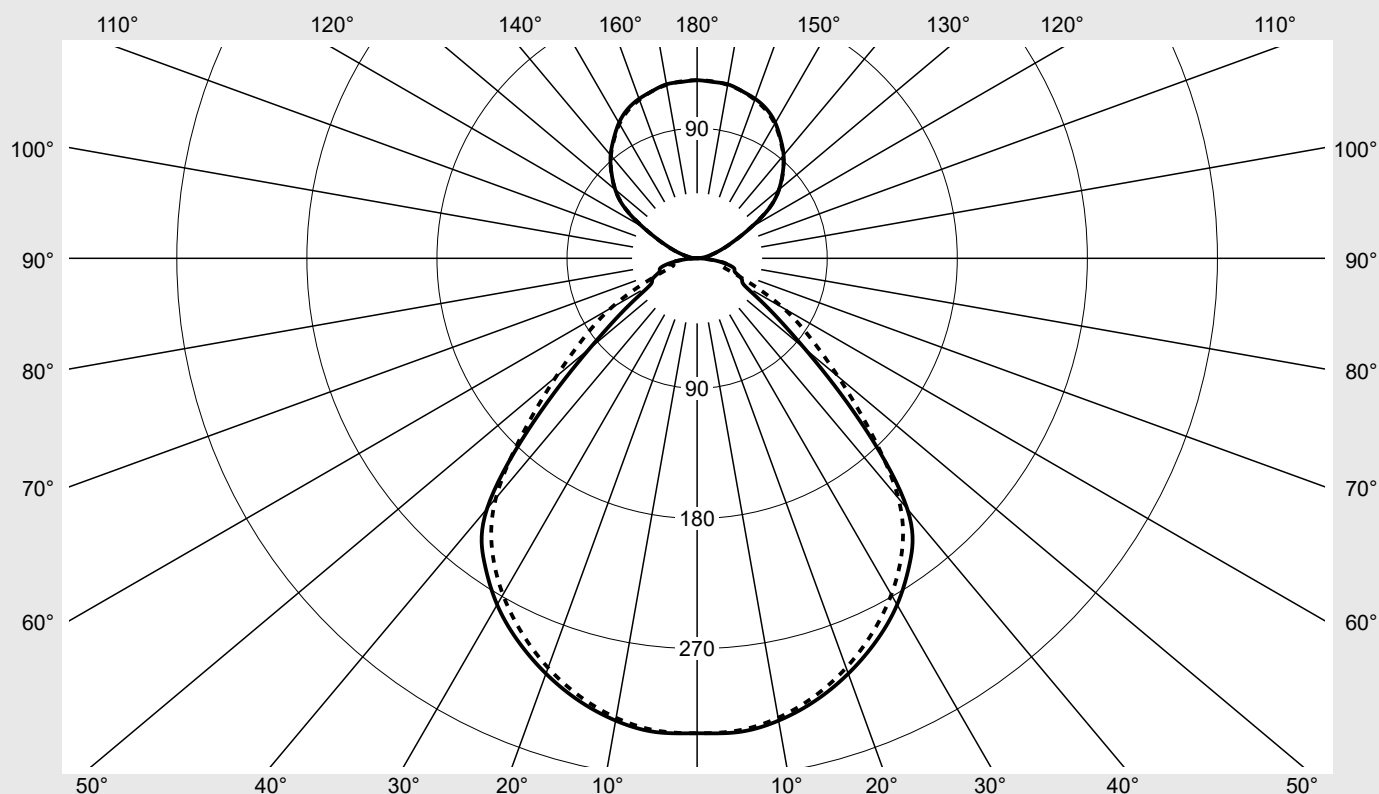

Classifications

DIN 5040 B 5 3
CIE N1=64 N2=89 N3=97
N4=68 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 67.6%
 ϕ_o 32.4%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51MF33DB3MBA EAN: 4069025808141	LP number 60081_4
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	328.6	328.6	328.6	328.6	328.6	328.6	328.6	2.0	2.0
5°	329.0	327.3	325.4	326.6	328.1	327.9	327.9	15.6	17.6
10°	324.8	323.0	320.8	321.7	323.1	322.8	322.8	30.7	48.3
15°	316.7	315.0	312.7	313.2	314.2	313.8	313.7	44.5	92.8
20°	305.8	304.0	301.4	301.5	302.1	301.6	301.5	56.7	149.5
25°	292.6	290.5	287.3	287.1	287.8	286.9	286.3	66.8	216.3
30°	276.7	274.3	270.5	270.3	271.2	269.8	268.7	74.4	290.7
35°	256.7	254.3	249.7	250.0	250.6	249.2	247.1	78.9	369.6
40°	226.1	226.2	222.1	221.8	218.1	219.2	216.6	78.0	447.6
45°	159.9	170.2	172.6	169.3	154.5	169.0	169.8	64.6	512.2
50°	97.2	111.5	130.1	111.4	96.5	109.7	127.3	47.0	559.2
55°	59.9	68.4	96.9	68.1	59.3	66.6	95.3	32.7	591.9
60°	38.2	46.2	68.1	46.7	38.0	45.6	68.9	23.6	615.5
65°	34.0	39.5	42.1	40.5	34.9	40.5	39.8	19.4	634.9
70°	28.0	34.1	21.6	34.7	28.1	34.8	21.3	15.3	650.2
75°	26.4	23.8	18.9	24.3	26.8	24.1	17.3	12.3	662.5
80°	19.0	14.4	18.7	13.9	19.2	14.6	20.0	9.0	671.6
85°	8.9	8.3	7.0	8.3	8.8	8.5	7.0	4.4	676.0
90°	0.7	0.9	0.5	0.8	0.6	0.6	0.4	0.3	676.4
95°	2.8	2.7	2.7	2.7	2.7	2.7	2.7	1.5	677.8
100°	6.3	6.2	6.2	6.3	6.3	6.3	6.3	3.4	681.2
105°	11.1	11.0	11.2	11.3	11.4	11.3	11.4	5.9	687.2
110°	18.3	18.1	18.4	18.6	18.6	18.6	18.6	9.5	696.7
115°	28.2	28.2	28.4	28.5	28.7	28.8	28.7	14.2	710.8
120°	43.5	43.3	43.2	43.2	43.1	43.1	43.0	20.5	731.3
125°	61.5	61.3	61.3	61.2	61.6	61.6	61.2	27.6	758.9
130°	73.9	73.8	73.9	74.2	74.6	74.3	74.0	31.1	790.0
135°	83.8	83.8	84.1	84.6	84.6	84.2	84.0	32.6	822.7
140°	93.1	92.9	93.0	93.3	93.2	92.9	92.8	32.8	855.5
145°	100.7	100.8	101.0	100.9	100.6	100.5	100.2	31.7	887.1
150°	108.2	108.2	108.2	108.0	107.7	107.6	107.4	29.6	916.7
155°	113.8	113.5	113.3	113.0	112.9	112.9	112.9	26.2	942.9
160°	117.4	117.1	116.9	116.6	116.9	116.5	116.7	21.9	964.8
165°	119.8	119.8	119.8	119.9	119.8	119.5	119.8	17.0	981.8
170°	122.2	122.2	122.2	121.9	121.5	121.7	121.8	11.6	993.4
175°	122.5	122.5	122.6	122.7	122.8	122.9	122.9	5.9	999.3
180°	123.2	123.2	123.2	123.2	123.2	123.2	123.2	0.7	1000.0

Photometric test report

Family Silica® 21 round M			Order number: 51MF33DB3MBA EAN: 4069025808141							LP number 60081_4	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	14.8	15.8	15.5	16.6	17.5	14.6	15.6	15.3	16.4	17.3
	3H	15.4	16.3	16.1	17.1	18.1	15.2	16.1	16.0	16.9	17.9
	4H	15.8	16.7	16.6	17.5	18.5	15.5	16.4	16.3	17.2	18.2
	6H	16.2	17.0	17.1	17.9	18.9	15.9	16.7	16.8	17.5	18.6
	8H	16.4	17.1	17.2	17.9	19.0	16.1	16.8	16.9	17.7	18.7
	12H	16.5	17.2	17.4	18.0	19.1	16.2	16.9	17.1	17.7	18.8
4H	2H	14.9	15.7	15.7	16.5	17.5	14.7	15.6	15.5	16.4	17.4
	3H	15.6	16.4	16.5	17.2	18.2	15.6	16.4	16.5	17.2	18.2
	4H	16.2	16.8	17.0	17.7	18.7	16.1	16.8	17.0	17.6	18.7
	6H	16.8	17.3	17.6	18.2	19.2	16.7	17.3	17.6	18.1	19.2
	8H	16.9	17.4	17.8	18.3	19.4	16.9	17.4	17.8	18.3	19.4
	12H	17.2	17.6	18.1	18.5	19.6	17.1	17.5	18.0	18.4	19.5
8H	4H	16.3	16.8	17.2	17.7	18.8	16.3	16.8	17.2	17.7	18.8
	6H	17.0	17.5	17.9	18.3	19.5	17.0	17.4	17.9	18.3	19.4
	8H	17.4	17.8	18.3	18.7	19.8	17.4	17.8	18.3	18.7	19.8
	12H	17.7	18.0	18.6	18.9	20.1	17.7	18.0	18.6	18.9	20.1
12H	4H	16.4	16.8	17.3	17.7	18.8	16.4	16.8	17.2	17.7	18.8
	6H	17.2	17.5	18.1	18.4	19.5	17.1	17.5	18.0	18.4	19.5
	8H	17.5	17.8	18.4	18.8	19.9	17.6	17.9	18.5	18.8	19.9

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 586	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6900.2	7344.0	7449.9	7306.7	6668.2	7292.4	7326.8
50°	4612.3	5291.4	6178.0	5288.3	4581.7	5207.5	6044.2
55°	3185.9	3639.7	5157.8	3623.8	3156.6	3545.0	5072.2
60°	2328.3	2820.8	4153.2	2851.8	2321.2	2783.8	4202.1
65°	2458.4	2854.0	3040.8	2924.2	2519.8	2925.4	2876.7
70°	2493.8	3040.2	1925.9	3097.0	2507.7	3102.9	1902.4
75°	3114.8	2802.3	2224.2	2863.4	3159.8	2841.9	2039.2
80°	3332.0	2522.9	3292.5	2450.2	3370.5	2571.4	3512.7
85°	3098.9	2897.6	2446.3	2907.4	3081.8	2968.7	2459.6

Photometric test report

Family
Silica® 21 round M

Order number: 51MF33DB3MBA
EAN: 4069025808141

LP number
60081_4

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

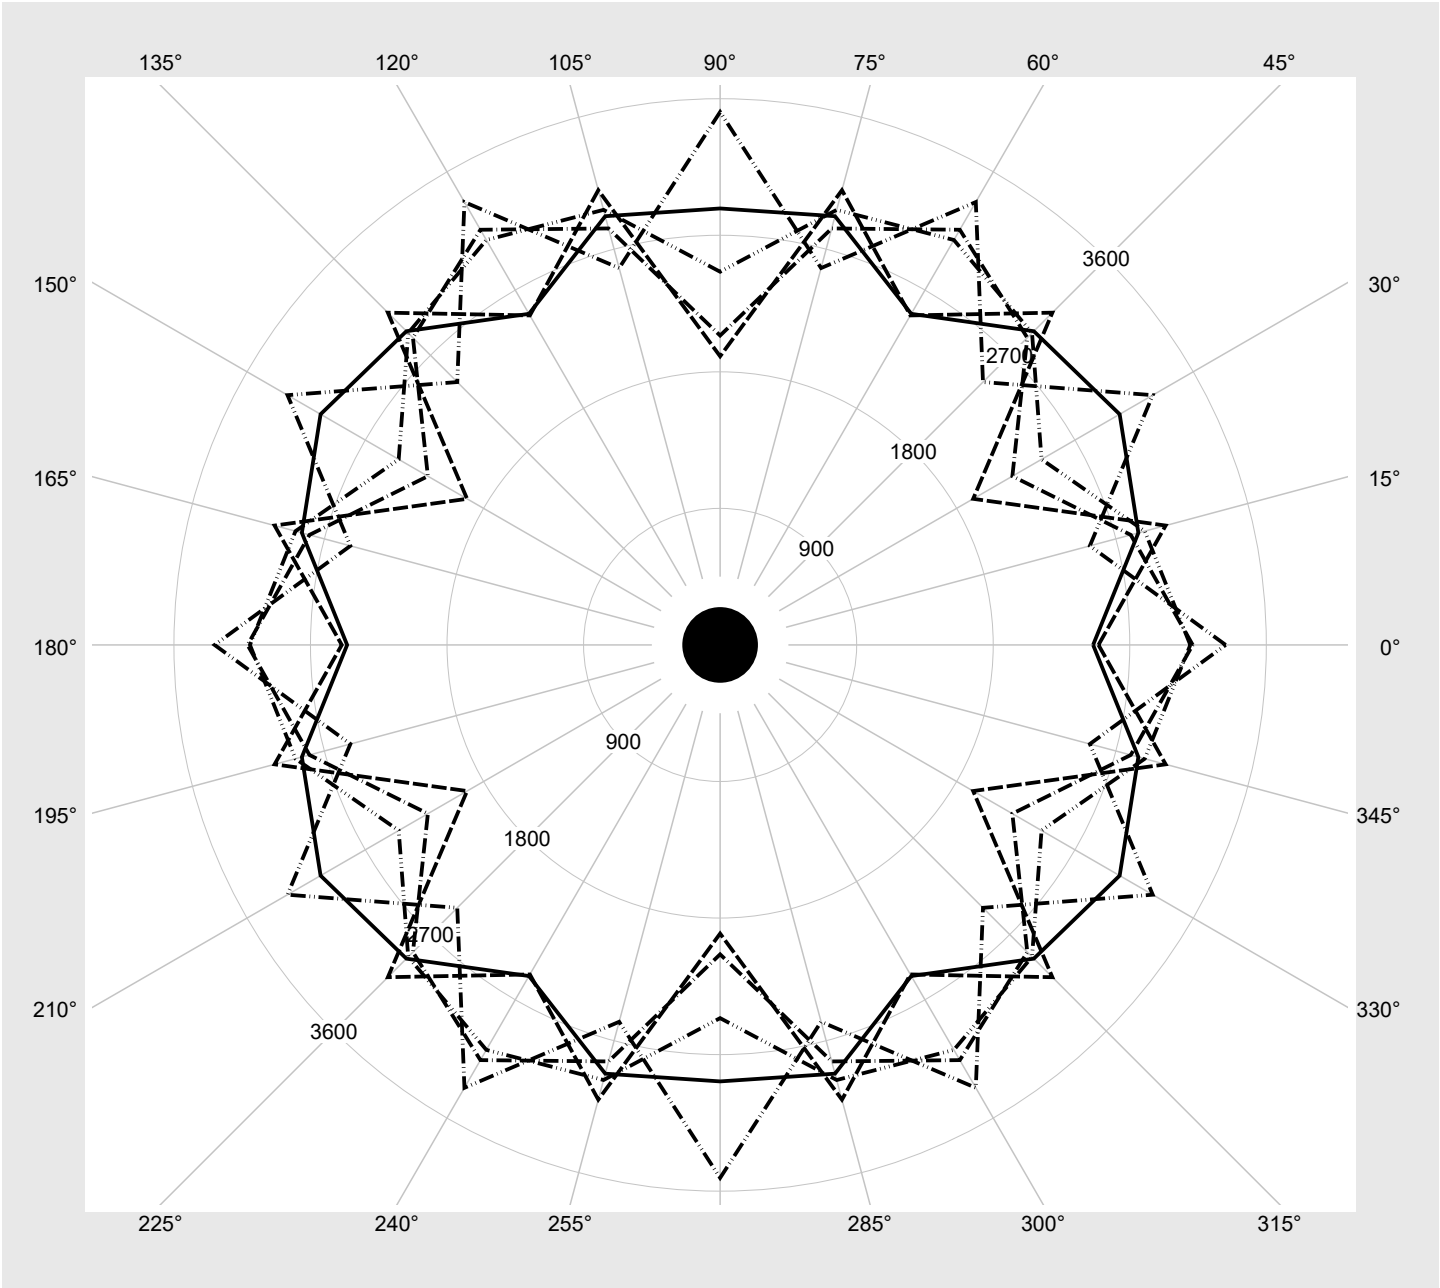

Photometric test report

Family Silica® 21 round M	Order number: 51MF33DB3MBA EAN: 4069025808141	LP number 60081_4
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	8230	50.3
95	241	252	7818	47.7
90	228	250	7405	45.2
85	215	248	6989	42.6
80	202	246	6573	40.1
75	190	243	6188	37.8
70	177	241	5769	35.4
65	164	238	5348	33.0
60	151	235	4927	30.5
55	139	232	4536	28.1
50	126	228	4112	25.6
45	114	225	3718	23.3
40	101	220	3291	20.7
35	89	216	2895	18.4
30	76	210	2465	15.9
25	64	204	2067	13.6
20	51	195	1635	11.2
15	39	185	1234	8.8
10	27	172	832	6.2
5	14	148	396	2.7
2	7	122	160	1.1