


Photometric test report

Family Silica® 21 round S	Order number: 51MF41DAENBA EAN: 4069025808790	LP number 60071_79
	Version Suspended luminaire, housing, black, cover, opal, direct extremely wide distribution, UGR≤22	serial documentation 20.05.2026
	Lamps LED 4000 K CRI ≥ 90	
	Controlgear ECG-DALI	
	Rated values Net luminous flux = 2190 lm Power consumption = 16.6 W Luminous efficacy = 131.9 lm/W	



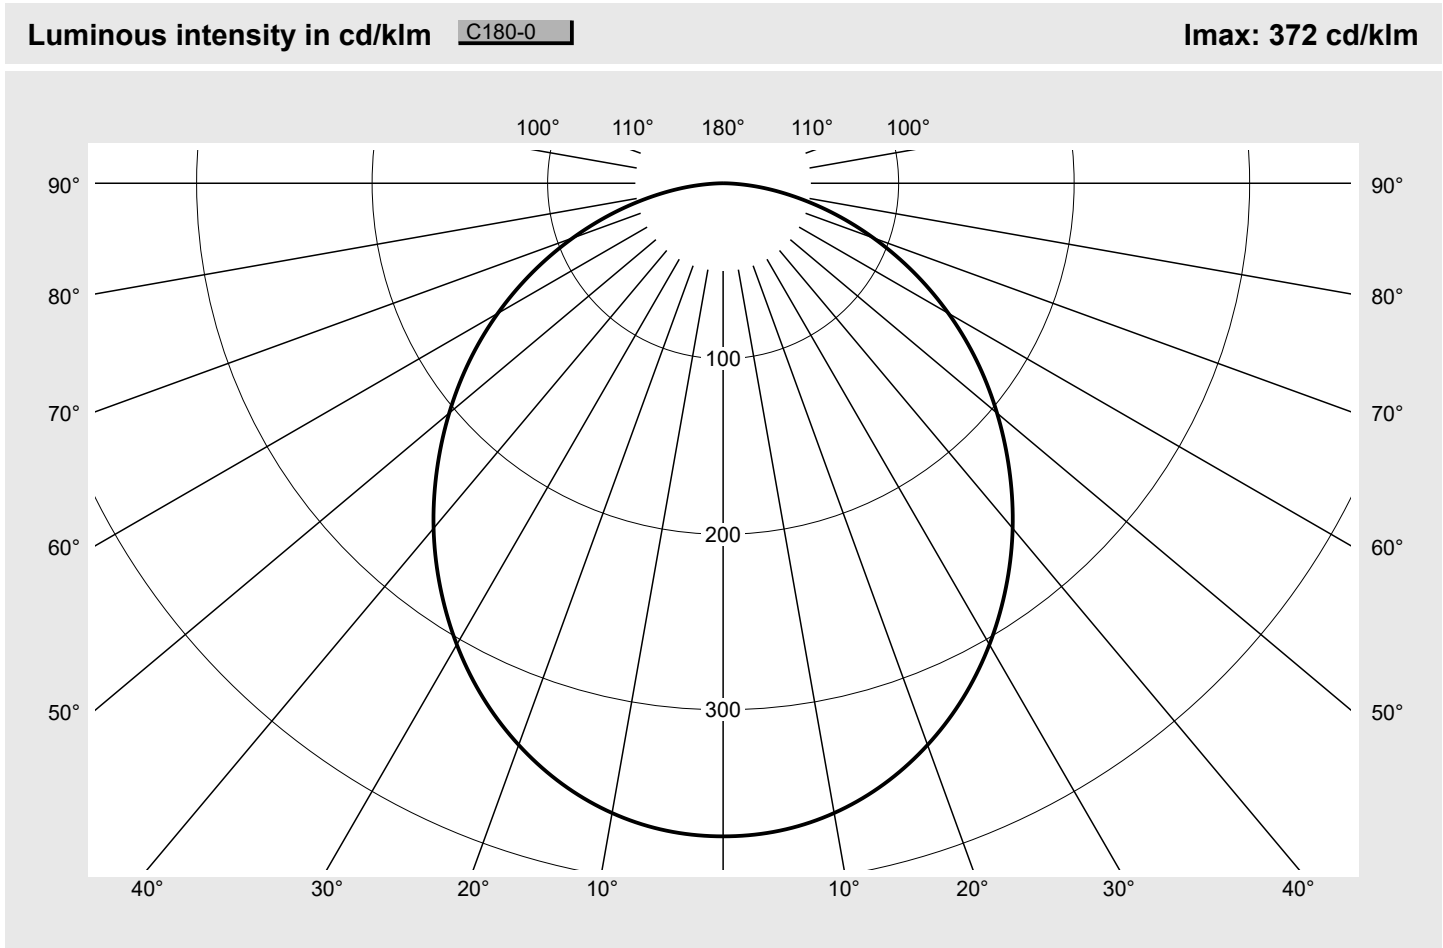

Classifications		Luminaire light output ratios	
DIN 5040	A 4 0	η_{LB}	100.0%
CIE	N1=49 N2=79 N3=96	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51MF41DAENBA EAN: 4069025808790	LP number 60071_79
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	372.1	2.2	2.2
5°	370.3	17.7	19.9
10°	364.3	34.7	54.6
15°	354.3	50.3	104.9
20°	340.6	63.8	168.7
25°	323.6	75.0	243.7
30°	303.5	83.2	326.8
35°	281.0	88.3	415.2
40°	256.7	90.4	505.6
45°	230.6	89.4	595.0
50°	203.7	85.5	680.5
55°	176.4	79.2	759.7
60°	148.2	70.4	830.1
65°	119.6	59.4	889.5
70°	91.1	46.9	936.5
75°	63.8	33.8	970.3
80°	38.4	20.7	991.0
85°	16.5	9.0	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Silica® 21 round S			Order number: 51MF41DAENBA EAN: 4069025808790							LP number 60071_79	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	19.9	21.5	20.3	21.8	22.2	19.9	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 386
C-planes		0°		
γ	Luminance in cd/m²			
45°	6102.0			
50°	5931.7			
55°	5755.5			
60°	5548.3			
65°	5296.6			
70°	4986.9			
75°	4615.2			
80°	4142.4			
85°	3538.5			

Photometric test report

Family
Silica® 21 round S

Order number: 51MF41DAENBA
EAN: 4069025808790

LP number
60071_79

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

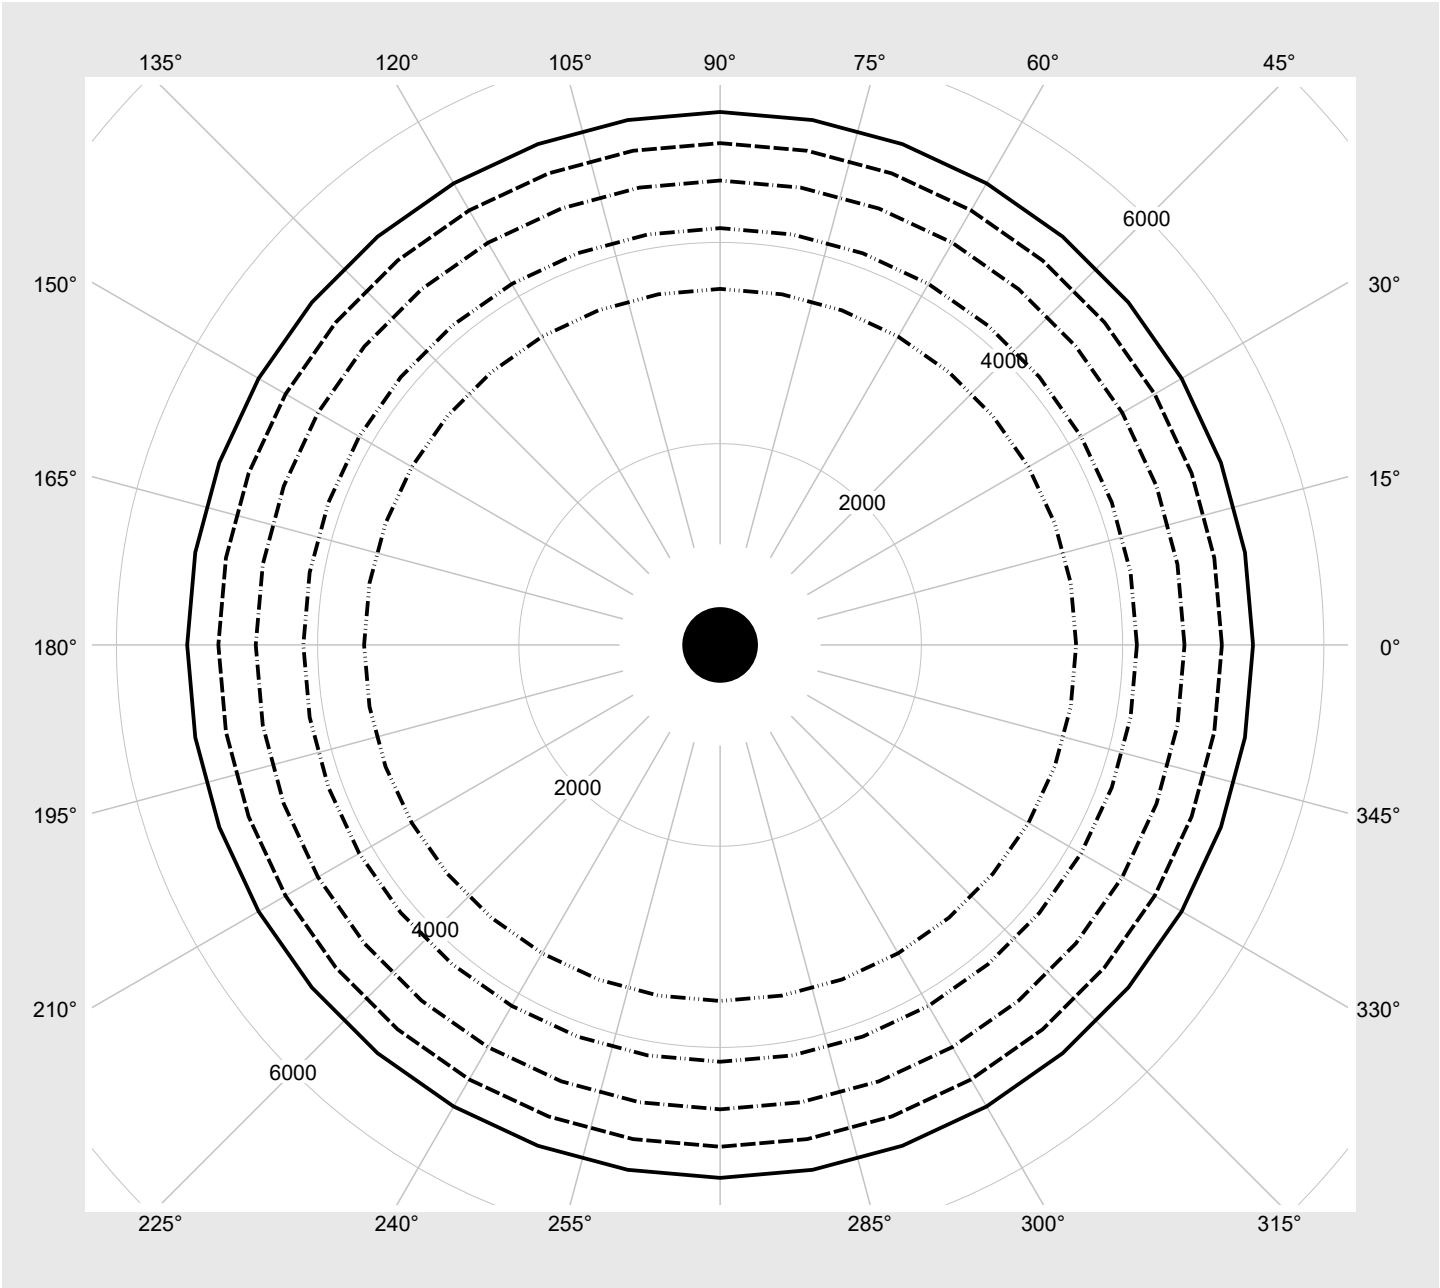

Photometric test report

Family Silica® 21 round S	Order number: 51MF41DAENBA EAN: 4069025808790	LP number 60071_79
Dimming levels table environmental temperature: 25°C		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2190	16.6
95	241	252	2082	15.8
90	228	250	1973	14.9
85	215	248	1863	14.1
80	202	246	1754	13.3
75	189	243	1643	12.5
70	176	241	1533	11.7
65	163	238	1422	10.9
60	150	235	1310	10.1
55	138	232	1207	9.4
50	125	228	1096	8.6
45	112	224	983	7.8
40	100	220	879	7.0
35	87	215	766	6.2
30	75	209	660	5.5
25	62	202	547	4.6
20	50	194	440	3.8
15	37	183	326	3.0
10	25	169	219	2.2
5	13	145	112	1.3