




# Photometric test report

<b>Family</b> <b>Spot 21 Licross®</b>	<b>Order number: 51SL33MB11D2C</b> <b>EAN: 4069025502575</b>	<b>LP number</b> <b>59933_38</b>										
	<table border="0"> <tr> <td><b>Version</b></td> <td>housing, black, reflector, cover glass, transparent, medium distribution</td> </tr> <tr> <td><b>Lamps</b></td> <td>LED 4000 K   CRI ≥ 90</td> </tr> <tr> <td><b>Controlgear</b></td> <td>ECG Multilumen</td> </tr> <tr> <td><b>Setting</b></td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td><b>Rated values</b></td> <td>Net luminous flux = 2890 lm Power consumption = 18.5 W Luminous efficacy = 156.2 lm/W</td> </tr> </table>	<b>Version</b>	housing, black, reflector, cover glass, transparent, medium distribution	<b>Lamps</b>	LED 4000 K   CRI ≥ 90	<b>Controlgear</b>	ECG Multilumen	<b>Setting</b>	factory setting: DIP-Step=4	<b>Rated values</b>	Net luminous flux = 2890 lm Power consumption = 18.5 W Luminous efficacy = 156.2 lm/W	<b>serial documentation</b> <b>21.05.2026</b>  
<b>Version</b>	housing, black, reflector, cover glass, transparent, medium distribution											
<b>Lamps</b>	LED 4000 K   CRI ≥ 90											
<b>Controlgear</b>	ECG Multilumen											
<b>Setting</b>	factory setting: DIP-Step=4											
<b>Rated values</b>	Net luminous flux = 2890 lm Power consumption = 18.5 W Luminous efficacy = 156.2 lm/W											

**Luminous intensity in cd/klm** C180-0 **Imax: 2394 cd/klm**

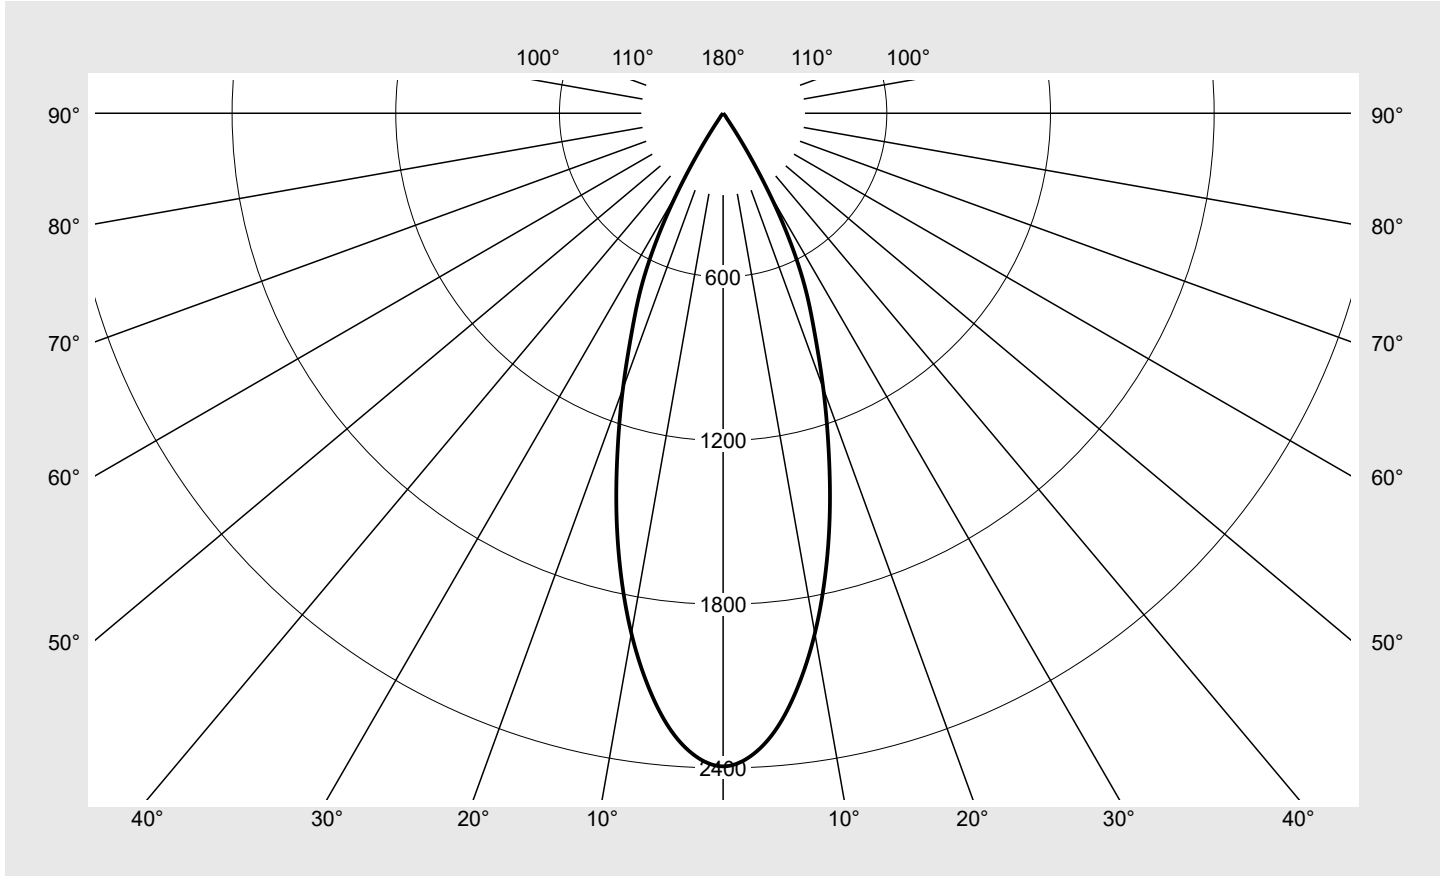

Classifications	
DIN 5040	A 8 0
CIE	N1=99 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Spot 21 Licross®</b>	<b>Order number: 51SL33MB11D2C</b> <b>EAN: 4069025502575</b>	<b>LP number</b> <b>59933_38</b>
--	---	-------------------------------------

**sitEco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2394.0	3.6	3.6
2,5°	2357.4	28.2	31.8
5,0°	2262.2	54.0	85.8
7,5°	2115.3	75.7	161.5
10,0°	1936.2	92.2	253.7
12,5°	1731.2	102.7	356.4
15,0°	1511.2	107.2	463.6
17,5°	1284.7	105.9	569.5
20,0°	1073.6	100.7	670.2
22,5°	880.1	92.3	762.5
25,0°	718.6	83.3	845.8
27,5°	537.0	68.0	913.7
30,0°	335.8	46.0	959.8
32,5°	147.9	21.8	981.5
35,0°	37.2	5.9	987.4
37,5°	18.1	3.0	990.4
40,0°	12.3	2.2	992.6
42,5°	9.0	1.7	994.3
45,0°	6.5	1.3	995.5
47,5°	4.7	1.0	996.5
50,0°	3.6	0.8	997.2
52,5°	2.8	0.6	997.8
55,0°	2.2	0.5	998.3
57,5°	1.8	0.4	998.8
60,0°	1.4	0.3	999.1
62,5°	1.1	0.3	999.4
65,0°	0.9	0.2	999.6
67,5°	0.7	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

Family <b>Spot 21 Licross®</b>	Order number: <b>51SL33MB11D2C</b> EAN: <b>4069025502575</b>	LP number <b>59933_38</b>
-----------------------------------	---	------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	12.9	13.9	13.3	14.3	14.6	12.9	13.9	13.3	14.3	14.6
	3H	12.8	13.7	13.2	14.0	14.3	12.8	13.7	13.2	14.0	14.3
	4H	12.7	13.5	13.1	13.8	14.2	12.7	13.5	13.1	13.8	14.2
	6H	12.6	13.3	13.0	13.7	14.1	12.6	13.3	13.0	13.7	14.1
	8H	12.7	13.2	13.2	13.6	14.0	12.7	13.2	13.2	13.6	14.0
	12H	12.7	13.1	13.1	13.5	13.9	12.7	13.1	13.1	13.5	13.9
4H	2H	12.7	13.5	13.1	13.8	14.2	12.7	13.5	13.1	13.8	14.2
	3H	12.5	13.1	12.9	13.5	14.0	12.5	13.1	12.9	13.5	14.0
	4H	12.4	13.0	12.8	13.4	13.8	12.4	13.0	12.8	13.4	13.8
	6H	12.2	12.7	12.7	13.2	13.7	12.2	12.7	12.7	13.2	13.7
	8H	12.2	12.6	12.7	13.1	13.6	12.2	12.6	12.7	13.1	13.6
	12H	12.2	12.5	12.7	13.0	13.5	12.2	12.5	12.7	13.0	13.5
8H	4H	12.2	12.6	12.7	13.1	13.6	12.2	12.6	12.7	13.1	13.6
	6H	12.1	12.4	12.6	12.9	13.4	12.1	12.4	12.6	12.9	13.4
	8H	12.0	12.3	12.5	12.8	13.3	12.0	12.3	12.5	12.8	13.3
	12H	12.0	12.2	12.5	12.7	13.3	12.0	12.2	12.5	12.7	13.3
12H	4H	12.2	12.5	12.7	13.0	13.5	12.2	12.5	12.7	13.0	13.5
	6H	12.1	12.3	12.6	12.8	13.3	12.1	12.3	12.6	12.8	13.3
	8H	12.0	12.2	12.5	12.7	13.3	12.0	12.2	12.5	12.7	13.3


<b>Luminance table</b>	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---------------------------------	--------------------------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45,0°	5047.5
50,0°	3075.1
55,0°	2105.7
60,0°	1537.8
65,0°	1169.3
70,0°	803.2
75,0°	211.4
80,0°	0.0
85,0°	0.0

**Photometric test report**

<b>Family</b> Spot 21 Licross®	<b>Order number: 51SL33MB11D2C</b> <b>EAN: 4069025502575</b>	<b>LP number</b> 59933_38
-----------------------------------	---	------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

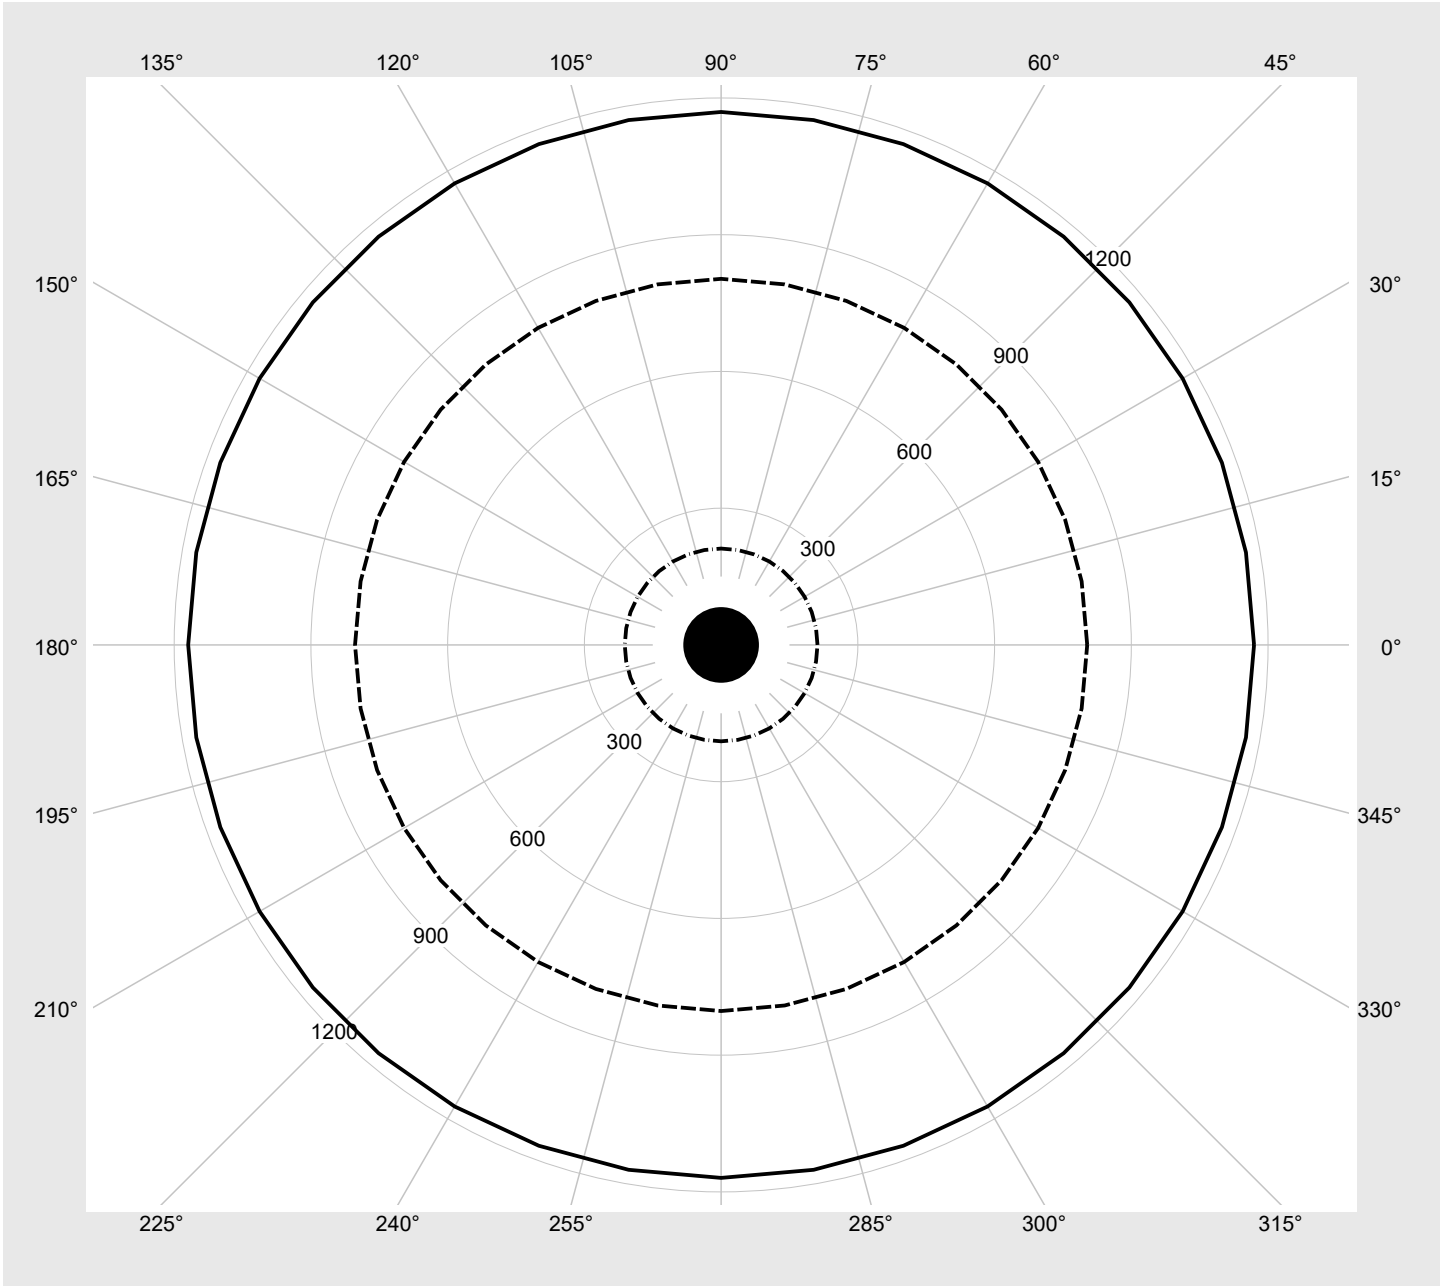

### Photometric test report

<b>Family</b> <b>Spot 21 Licross®</b>	<b>Order number: 51SL33MB11D2C</b> <b>EAN: 4069025502575</b>	<b>LP number</b> <b>59933_38</b>
--	---	-------------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3890	26.5
1	ON	OFF	OFF	3650	24.5
2	OFF	ON	OFF	3400	22.5
3	ON	ON	OFF	3150	20.5
4	OFF	OFF	ON	2890	18.5
5	ON	OFF	ON	2620	16.6
6	OFF	ON	ON	2350	14.8
7	ON	ON	ON	2070	12.9