




Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11A2C EAN: 4069025502612	LP number 59934_37										
	<table border="0"> <tr> <td>Version</td> <td>housing, black, reflector, cover glass, transparent, wide distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 2700 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td>Rated values</td> <td>Net luminous flux = 2580 lm Power consumption = 18.5 W Luminous efficacy = 139.5 lm/W</td> </tr> </table>	Version	housing, black, reflector, cover glass, transparent, wide distribution	Lamps	LED 2700 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=4	Rated values	Net luminous flux = 2580 lm Power consumption = 18.5 W Luminous efficacy = 139.5 lm/W	serial documentation 21.05.2026 
Version	housing, black, reflector, cover glass, transparent, wide distribution											
Lamps	LED 2700 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=4											
Rated values	Net luminous flux = 2580 lm Power consumption = 18.5 W Luminous efficacy = 139.5 lm/W											

Luminous intensity in cd/klm C180-0 **Imax: 1518 cd/klm**

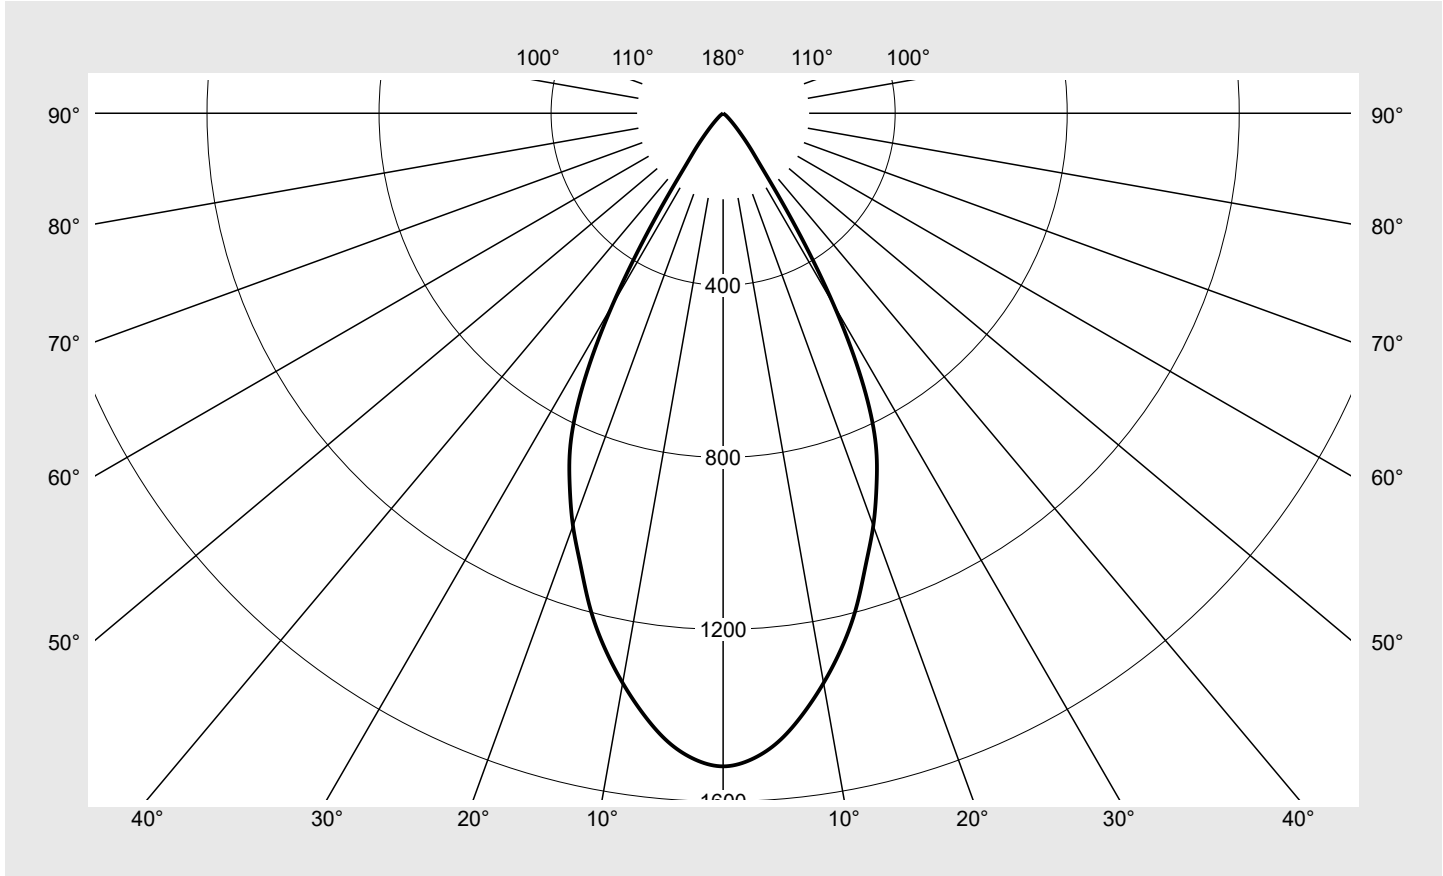

Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11A2C EAN: 4069025502612	LP number 59934_37
-----------------------------------	---	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0,0°	1518.5	2.3	2.3
2,5°	1503.9	18.0	20.3
5,0°	1467.3	35.1	55.3
7,5°	1410.8	50.5	105.8
10,0°	1345.0	64.0	169.8
12,5°	1273.2	75.5	245.4
15,0°	1192.8	84.6	330.0
17,5°	1102.1	90.9	420.8
20,0°	1020.8	95.7	516.6
22,5°	932.5	97.8	614.4
25,0°	836.7	96.9	711.3
27,5°	696.4	88.2	799.5
30,0°	514.1	70.5	869.9
32,5°	318.7	46.9	916.9
35,0°	172.5	27.1	944.0
37,5°	109.8	18.3	962.3
40,0°	70.5	12.4	974.8
42,5°	44.6	8.3	983.0
45,0°	28.1	5.4	988.5
47,5°	17.7	3.6	992.0
50,0°	11.6	2.4	994.5
52,5°	7.9	1.7	996.2
55,0°	5.3	1.2	997.4
57,5°	3.6	0.8	998.2
60,0°	2.5	0.6	998.8
62,5°	1.8	0.4	999.3
65,0°	1.2	0.3	999.6
67,5°	0.8	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11A2C EAN: 4069025502612	LP number 59934_37
-----------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.7	19.8	19.1	20.1	20.4	18.7	19.8	19.1	20.1	20.4
	3H	18.5	19.5	18.9	19.8	20.2	18.5	19.5	18.9	19.8	20.2
	4H	18.5	19.3	18.9	19.7	20.1	18.5	19.3	18.9	19.7	20.1
	6H	18.4	19.1	18.8	19.5	19.9	18.4	19.1	18.8	19.5	19.9
	8H	18.5	19.1	18.9	19.5	19.9	18.5	19.1	18.9	19.5	19.9
	12H	18.4	19.0	18.9	19.4	19.8	18.4	19.0	18.9	19.4	19.8
4H	2H	18.5	19.3	18.9	19.7	20.1	18.5	19.3	18.9	19.7	20.1
	3H	18.3	19.0	18.7	19.4	19.8	18.3	19.0	18.7	19.4	19.8
	4H	18.2	18.8	18.6	19.2	19.6	18.2	18.8	18.6	19.2	19.6
	6H	18.0	18.6	18.5	19.0	19.5	18.0	18.6	18.5	19.0	19.5
	8H	18.0	18.5	18.5	18.9	19.4	18.0	18.5	18.5	18.9	19.4
	12H	18.0	18.4	18.5	18.8	19.3	18.0	18.4	18.5	18.8	19.3
8H	4H	18.0	18.5	18.5	18.9	19.4	18.0	18.5	18.5	18.9	19.4
	6H	17.9	18.3	18.4	18.7	19.3	17.9	18.3	18.4	18.7	19.3
	8H	17.8	18.2	18.3	18.6	19.2	17.8	18.2	18.3	18.6	19.2
	12H	17.8	18.0	18.3	18.5	19.1	17.8	18.0	18.3	18.5	19.1
12H	4H	18.0	18.4	18.5	18.8	19.3	18.0	18.4	18.5	18.8	19.3
	6H	17.9	18.1	18.4	18.6	19.2	17.9	18.1	18.4	18.6	19.2
	8H	17.8	18.0	18.3	18.5	19.1	17.8	18.0	18.3	18.5	19.1


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45,0°	19384.7
50,0°	8834.7
55,0°	4523.6
60,0°	2447.6
65,0°	1389.5
70,0°	715.6
75,0°	188.8
80,0°	0.0
85,0°	0.0

Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11A2C EAN: 4069025502612	LP number 59934_37
--	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

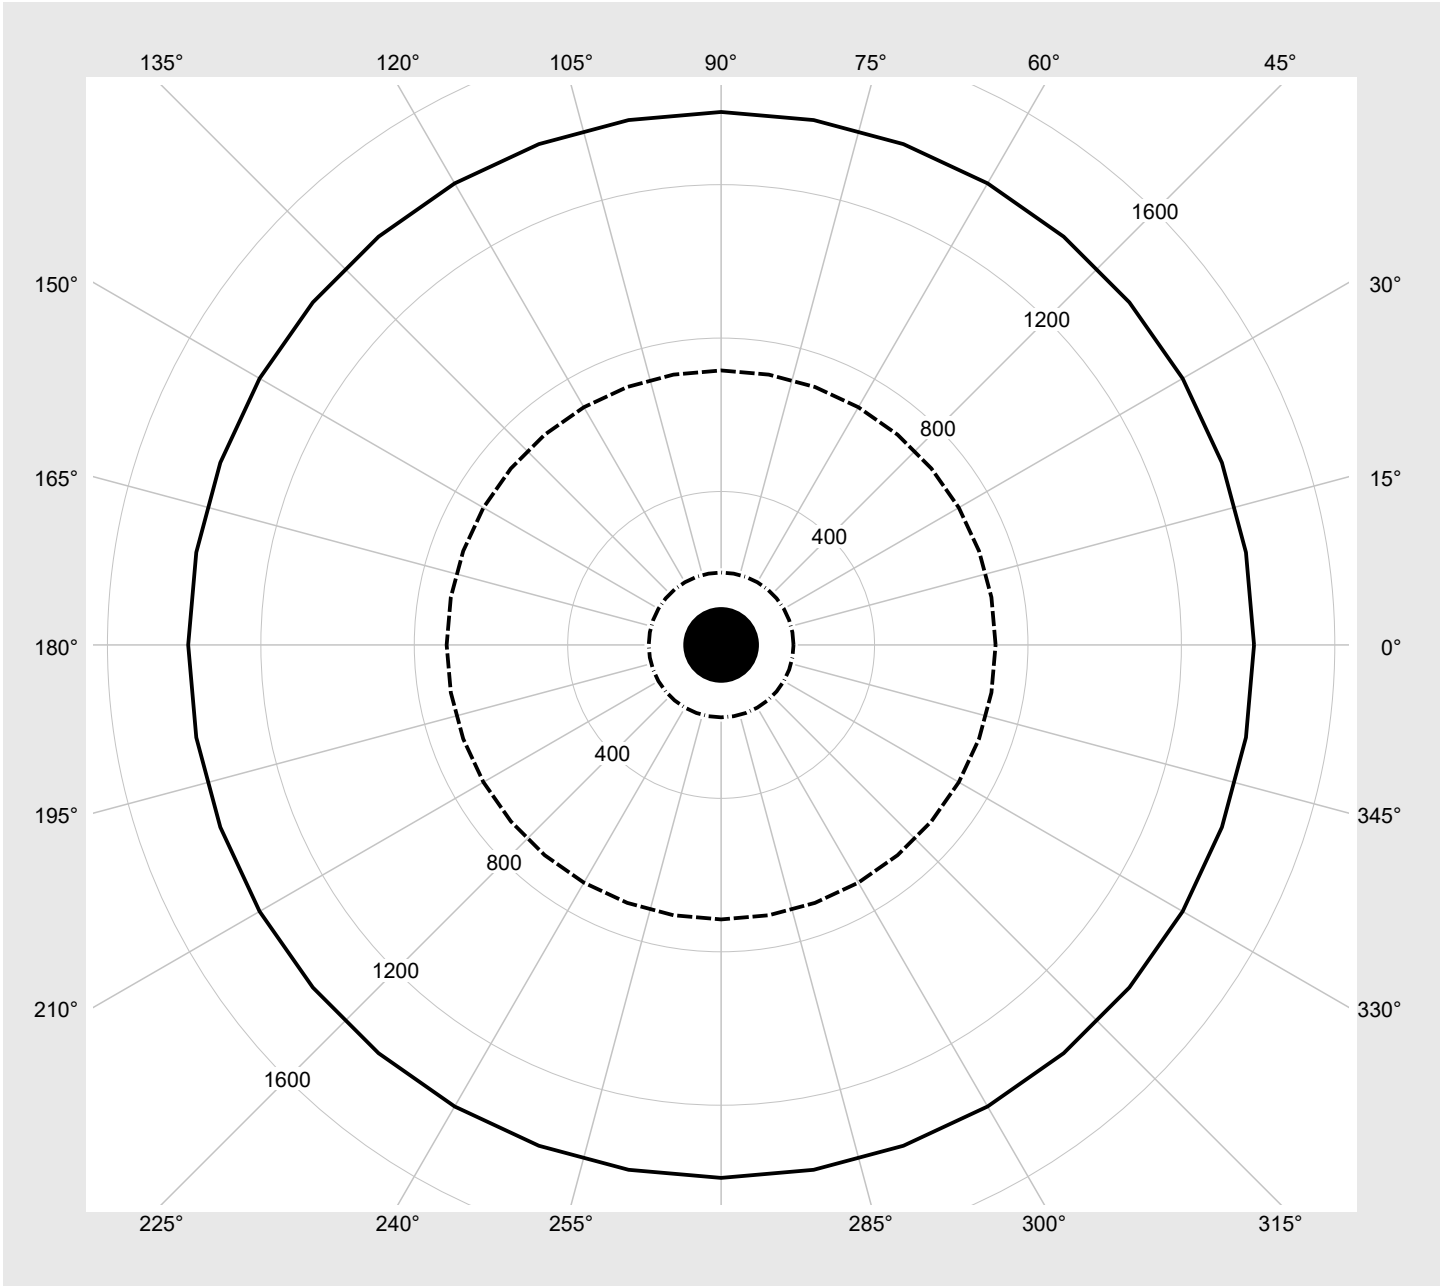

Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11A2C EAN: 4069025502612	LP number 59934_37
--	---	-------------------------------------

Multilumen Table	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3480	26.5
1	ON	OFF	OFF	3260	24.5
2	OFF	ON	OFF	3040	22.5
3	ON	ON	OFF	2810	20.5
4	OFF	OFF	ON	2580	18.5
5	ON	OFF	ON	2350	16.6
6	OFF	ON	ON	2100	14.8
7	ON	ON	ON	1860	12.9