




Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11D2C EAN: 4069025502636	LP number 59934_40
	Version housing, black, reflector, cover glass, transparent, wide distribution	serial documentation 21.05.2026
	Lamps LED 4000 K CRI ≥ 90	
Controlgear ECG Multilumen	Setting factory setting: DIP-Step=4	
Rated values	Net luminous flux = 2810 lm Power consumption = 18.5 W Luminous efficacy = 151.9 lm/W	

Luminous intensity in cd/klm C180-0 **Imax: 1518 cd/klm**

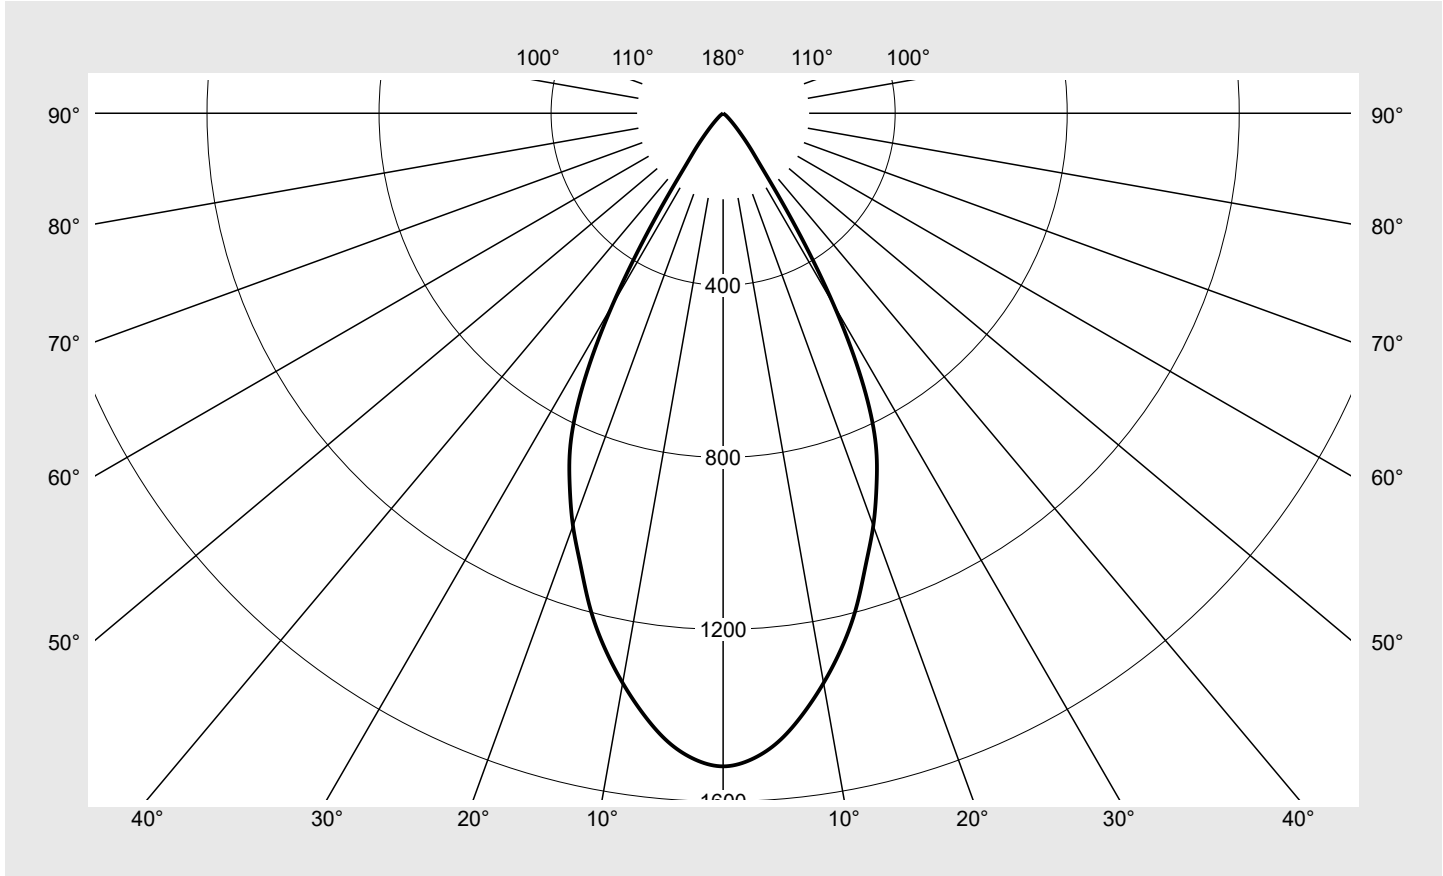

Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11D2C EAN: 4069025502636	LP number 59934_40
-----------------------------------	---	-------------------------------------

sitEco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1518.5	2.3	2.3
2,5°	1503.9	18.0	20.3
5,0°	1467.3	35.1	55.3
7,5°	1410.8	50.5	105.8
10,0°	1345.0	64.0	169.8
12,5°	1273.2	75.5	245.4
15,0°	1192.8	84.6	330.0
17,5°	1102.1	90.9	420.8
20,0°	1020.8	95.7	516.6
22,5°	932.5	97.8	614.4
25,0°	836.7	96.9	711.3
27,5°	696.4	88.2	799.5
30,0°	514.1	70.5	869.9
32,5°	318.7	46.9	916.9
35,0°	172.5	27.1	944.0
37,5°	109.8	18.3	962.3
40,0°	70.5	12.4	974.8
42,5°	44.6	8.3	983.0
45,0°	28.1	5.4	988.5
47,5°	17.7	3.6	992.0
50,0°	11.6	2.4	994.5
52,5°	7.9	1.7	996.2
55,0°	5.3	1.2	997.4
57,5°	3.6	0.8	998.2
60,0°	2.5	0.6	998.8
62,5°	1.8	0.4	999.3
65,0°	1.2	0.3	999.6
67,5°	0.8	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11D2C EAN: 4069025502636	LP number 59934_40
-----------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.0	20.1	19.3	20.4	20.7	19.0	20.1	19.3	20.4	20.7
	3H	18.8	19.8	19.2	20.1	20.5	18.8	19.8	19.2	20.1	20.5
	4H	18.8	19.6	19.2	20.0	20.3	18.8	19.6	19.2	20.0	20.3
	6H	18.7	19.4	19.1	19.8	20.2	18.7	19.4	19.1	19.8	20.2
	8H	18.8	19.4	19.2	19.8	20.2	18.8	19.4	19.2	19.8	20.2
	12H	18.7	19.3	19.2	19.7	20.1	18.7	19.3	19.2	19.7	20.1
4H	2H	18.8	19.6	19.2	20.0	20.4	18.8	19.6	19.2	20.0	20.4
	3H	18.6	19.3	19.0	19.7	20.1	18.6	19.3	19.0	19.7	20.1
	4H	18.5	19.1	18.9	19.5	19.9	18.5	19.1	18.9	19.5	19.9
	6H	18.3	18.9	18.8	19.3	19.8	18.3	18.9	18.8	19.3	19.8
	8H	18.3	18.8	18.8	19.2	19.7	18.3	18.8	18.8	19.2	19.7
	12H	18.3	18.7	18.8	19.1	19.6	18.3	18.7	18.8	19.1	19.6
8H	4H	18.3	18.8	18.8	19.2	19.7	18.3	18.8	18.8	19.2	19.7
	6H	18.2	18.6	18.7	19.0	19.6	18.2	18.6	18.7	19.0	19.6
	8H	18.1	18.4	18.6	18.9	19.5	18.1	18.4	18.6	18.9	19.5
	12H	18.1	18.3	18.6	18.8	19.4	18.1	18.3	18.6	18.8	19.4
12H	4H	18.3	18.7	18.8	19.1	19.6	18.3	18.7	18.8	19.1	19.6
	6H	18.2	18.4	18.7	18.9	19.5	18.2	18.4	18.7	18.9	19.5
	8H	18.1	18.3	18.6	18.8	19.4	18.1	18.3	18.6	18.8	19.4


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45,0°	21112.8
50,0°	9622.3
55,0°	4926.9
60,0°	2665.8
65,0°	1513.4
70,0°	779.4
75,0°	205.6
80,0°	0.0
85,0°	0.0

Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11D2C EAN: 4069025502636	LP number 59934_40
--	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

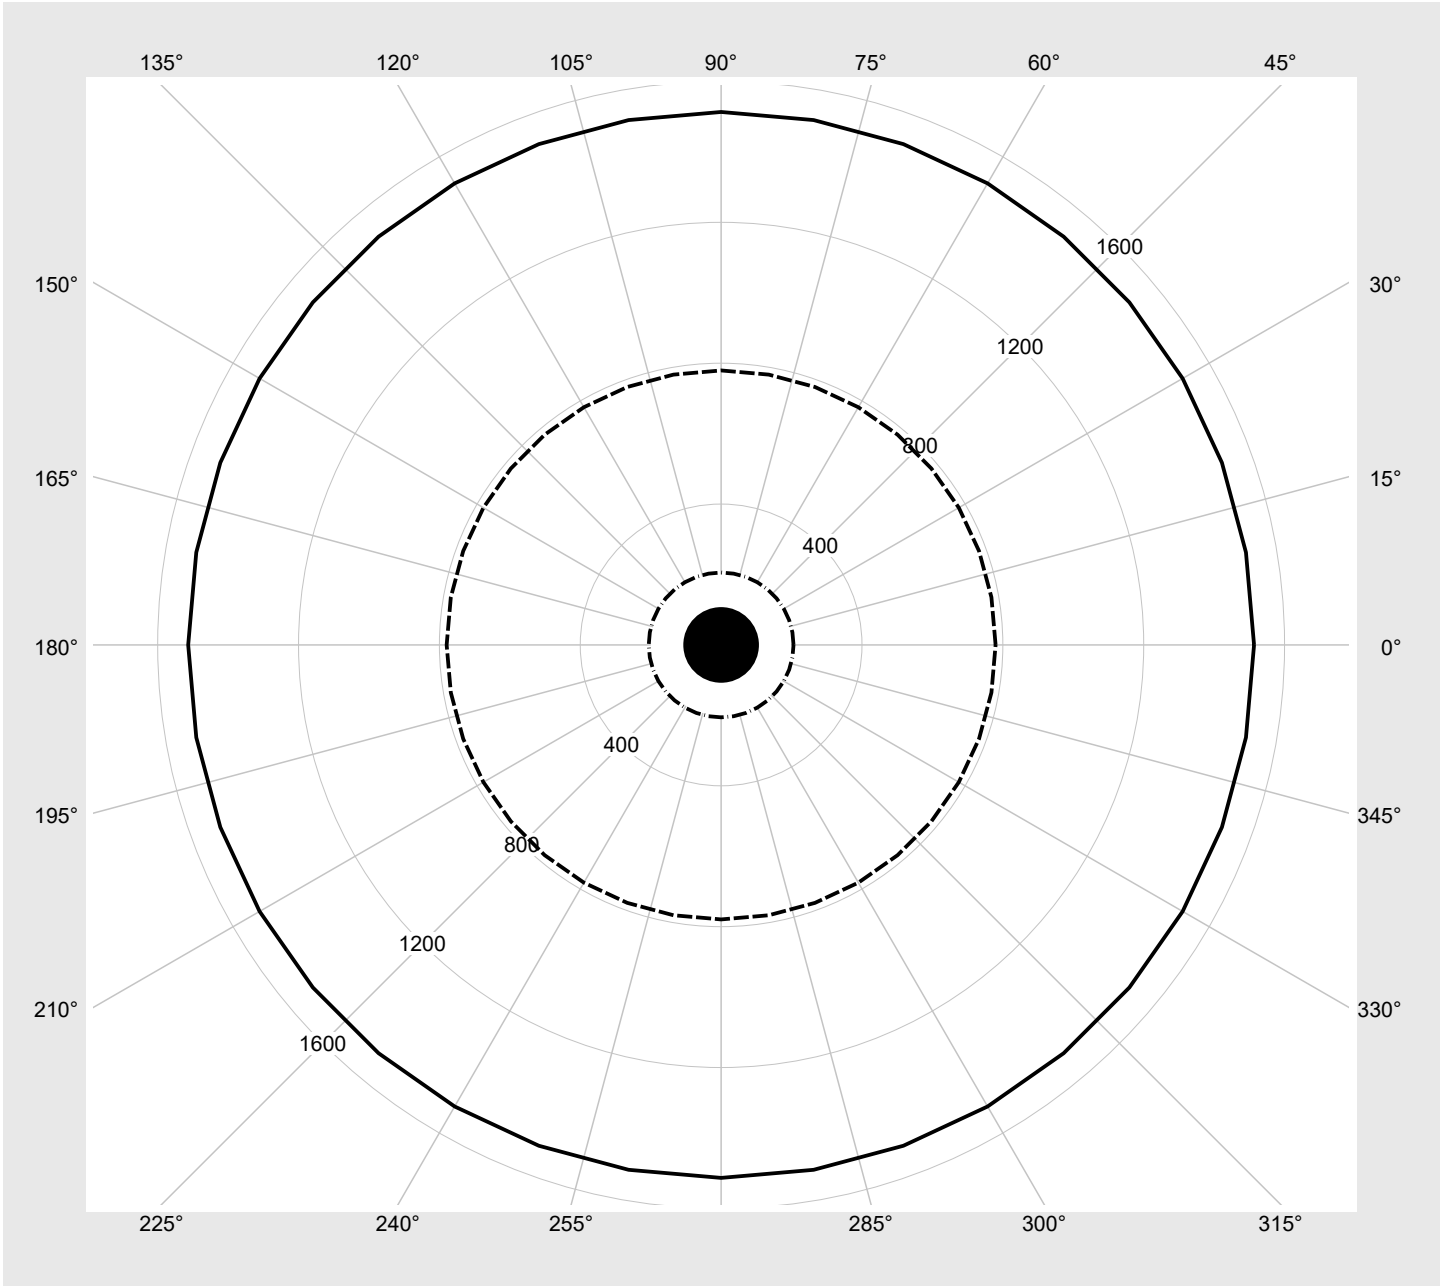

Photometric test report

Family Spot 21 Licross®	Order number: 51SL34MB11D2C EAN: 4069025502636	LP number 59934_40
--	---	-------------------------------------

Multilumen Table	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3790	26.5
1	ON	OFF	OFF	3550	24.5
2	OFF	ON	OFF	3310	22.5
3	ON	ON	OFF	3070	20.5
4	OFF	OFF	ON	2810	18.5
5	ON	OFF	ON	2550	16.6
6	OFF	ON	ON	2290	14.8
7	ON	ON	ON	2020	12.9