




Photometric test report

Family Spot 21 Licross®	Order number: 51SL63DB11B2C EAN: 4069025502650	LP number 59936_38
	Version housing, white aluminium, reflector, cover glass, transparent, medium distribution Lamps LED 3000 K CRI ≥ 90 Controlgear ECG-DALI-Multilumen Setting factory setting: DIP-Step=7	serial documentation 21.05.2026
	Rated values Net luminous flux = 2810 lm Power consumption = 19.8 W Luminous efficacy = 141.9 lm/W	

Luminous intensity in cd/klm C180-0 **Imax: 2273 cd/klm**

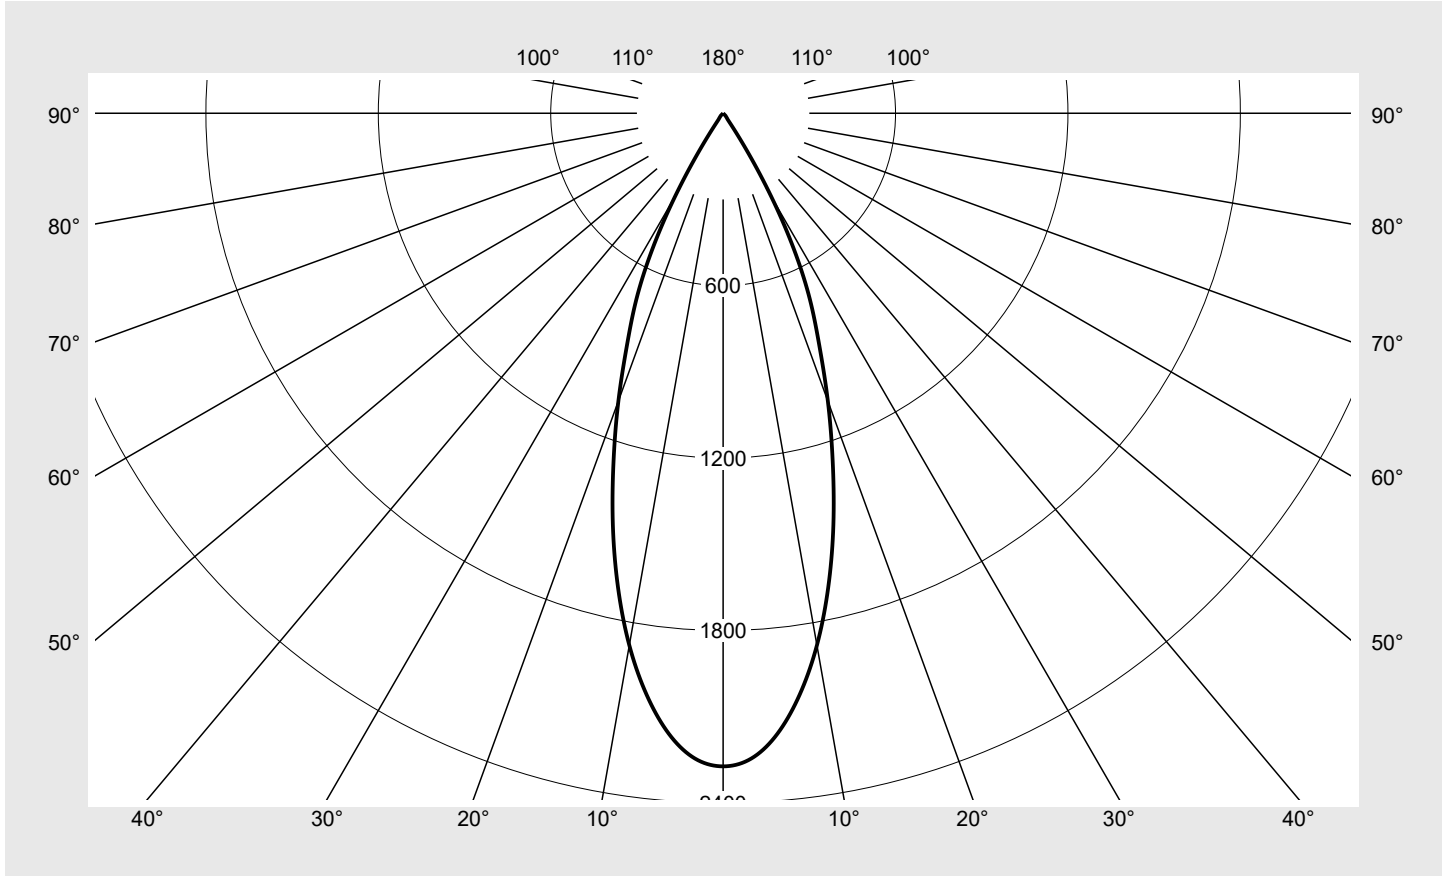

Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Licross®	Order number: 51SL63DB11B2C EAN: 4069025502650	LP number 59936_38
-----------------------------------	---	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2272.8	3.4	3.4
2,5°	2247.7	26.9	30.3
5,0°	2167.7	51.8	82.1
7,5°	2040.8	73.0	155.1
10,0°	1880.0	89.5	244.6
12,5°	1690.1	100.3	344.9
15,0°	1482.7	105.2	450.1
17,5°	1267.9	104.5	554.6
20,0°	1065.6	99.9	654.5
22,5°	874.9	91.8	746.3
25,0°	714.3	82.8	829.0
27,5°	533.8	67.6	896.6
30,0°	335.3	46.0	942.6
32,5°	151.5	22.3	964.9
35,0°	44.0	6.9	971.8
37,5°	23.3	3.9	975.7
40,0°	17.4	3.1	978.7
42,5°	13.8	2.6	981.3
45,0°	11.3	2.2	983.5
47,5°	9.4	1.9	985.4
50,0°	8.2	1.7	987.1
52,5°	7.3	1.6	988.7
55,0°	6.6	1.5	990.2
57,5°	6.0	1.4	991.6
60,0°	5.5	1.3	992.9
62,5°	5.0	1.2	994.1
65,0°	4.6	1.1	995.3
67,5°	4.1	1.0	996.3
70,0°	3.6	0.9	997.2
72,5°	3.0	0.8	998.0
75,0°	2.3	0.6	998.6
77,5°	1.8	0.5	999.1
80,0°	1.4	0.4	999.5
82,5°	1.0	0.3	999.8
85,0°	0.6	0.2	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Licross®	Order number: 51SL63DB11B2C EAN: 4069025502650	LP number 59936_38
-----------------------------------	---	------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	13.7	14.7	14.1	15.0	15.4	13.7	14.7	14.1	15.0	15.4
	3H	14.0	14.9	14.4	15.2	15.6	14.0	14.9	14.4	15.2	15.6
	4H	14.1	14.9	14.5	15.3	15.6	14.1	14.9	14.5	15.3	15.6
	6H	14.2	14.9	14.6	15.3	15.7	14.2	14.9	14.6	15.3	15.7
	8H	14.4	14.9	14.8	15.3	15.7	14.4	14.9	14.8	15.3	15.7
	12H	14.3	14.8	14.8	15.2	15.6	14.3	14.8	14.8	15.2	15.6
4H	2H	13.7	14.5	14.1	14.8	15.2	13.7	14.5	14.1	14.8	15.2
	3H	14.0	14.7	14.5	15.1	15.5	14.0	14.7	14.5	15.1	15.5
	4H	14.2	14.8	14.7	15.2	15.7	14.2	14.8	14.7	15.2	15.7
	6H	14.3	14.9	14.8	15.3	15.8	14.3	14.9	14.8	15.3	15.8
	8H	14.4	14.9	14.9	15.3	15.8	14.4	14.9	14.9	15.3	15.8
	12H	14.5	14.8	15.0	15.3	15.8	14.5	14.8	15.0	15.3	15.8
8H	4H	14.2	14.7	14.7	15.1	15.6	14.2	14.7	14.7	15.1	15.6
	6H	14.5	14.8	15.0	15.3	15.8	14.5	14.8	15.0	15.3	15.8
	8H	14.5	14.8	15.0	15.3	15.8	14.5	14.8	15.0	15.3	15.8
	12H	14.6	14.8	15.1	15.3	15.9	14.6	14.8	15.1	15.3	15.9
12H	4H	14.2	14.6	14.7	15.0	15.5	14.2	14.6	14.7	15.0	15.5
	6H	14.4	14.7	15.0	15.2	15.7	14.4	14.7	15.0	15.2	15.7
	8H	14.5	14.8	15.1	15.3	15.8	14.5	14.8	15.1	15.3	15.8

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---------------------------------	--------------------------------------

C-planes		0°
γ	Luminance in cd/m ²	
45,0°	8529.5	
50,0°	6808.6	
55,0°	6141.2	
60,0°	5871.1	
65,0°	5809.2	
70,0°	5617.8	
75,0°	4742.9	
80,0°	4302.2	
85,0°	3675.3	


Photometric test report

Family Spot 21 Licross®	Order number: 51SL63DB11B2C EAN: 4069025502650	LP number 59936_38
-----------------------------------	---	------------------------------




Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

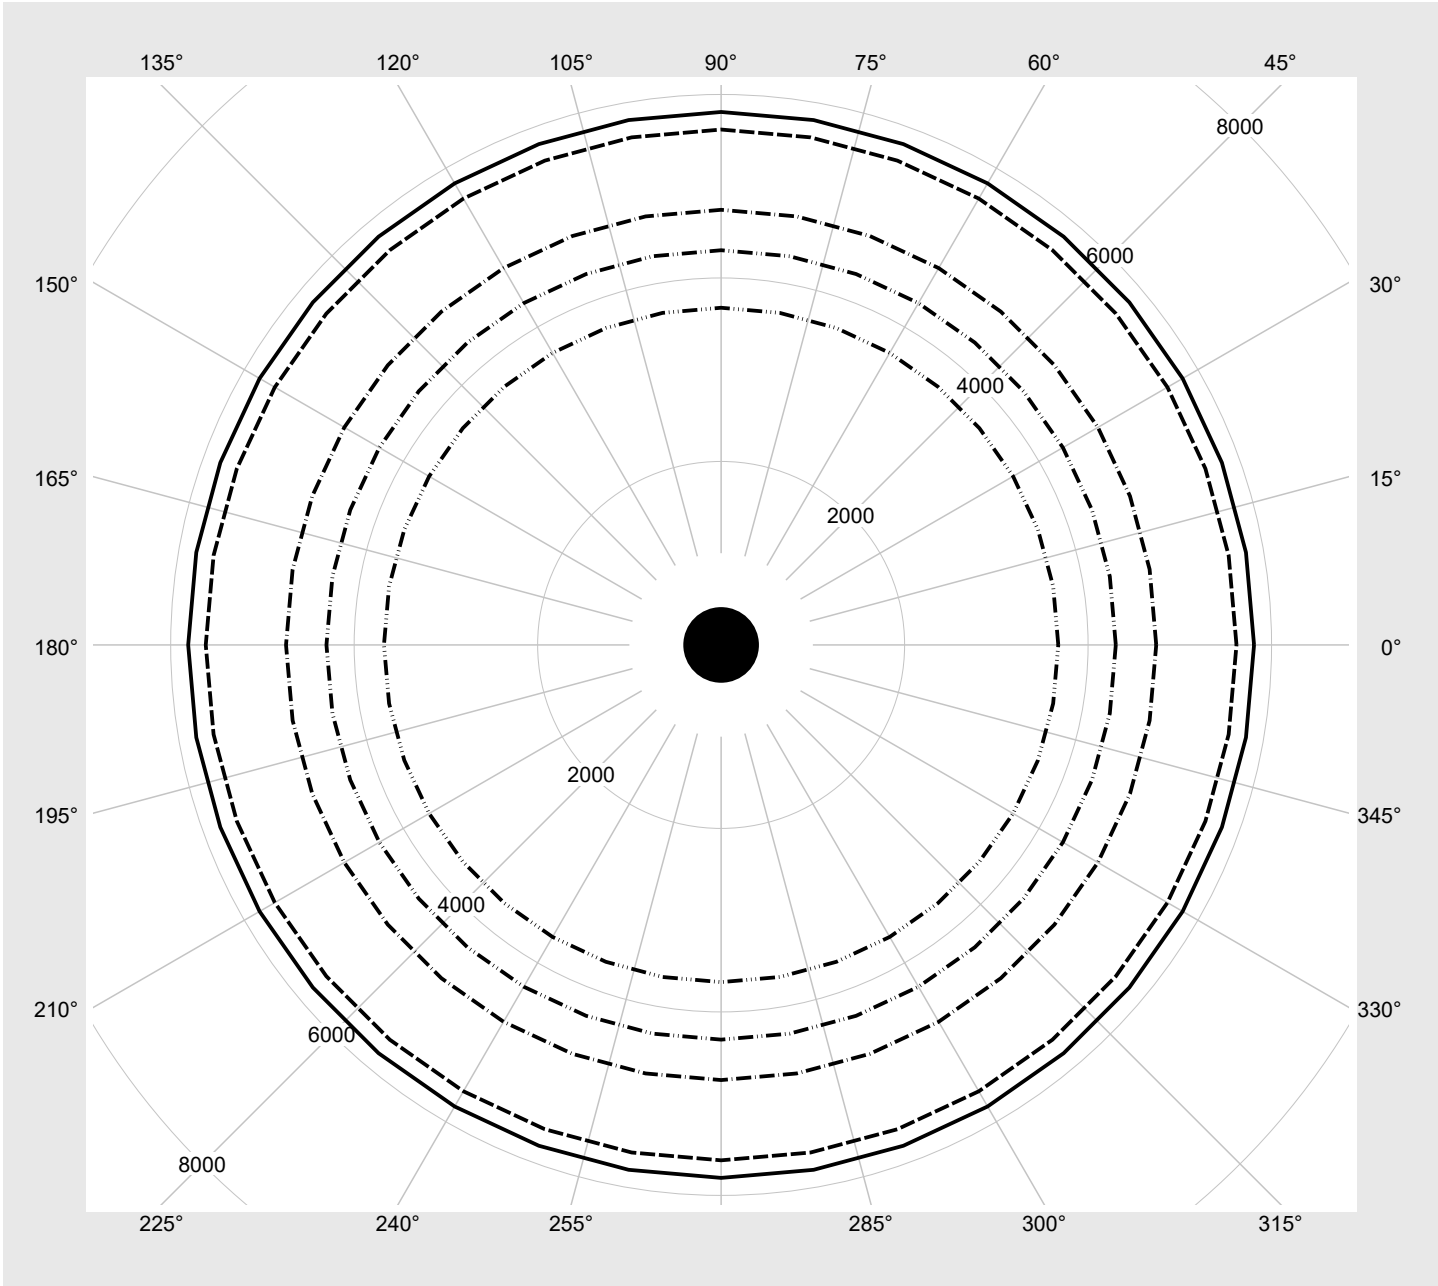

Photometric test report

Family Spot 21 Licross®	Order number: 51SL63DB11B2C EAN: 4069025502650	LP number 59936_38
--	---	-------------------------------------

Multilumen Table	environmental temperature: 25°C	
-------------------------	---------------------------------	---

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
11	ON	OFF	ON	ON	3780	28.1
10	ON	OFF	ON	OFF	3540	25.9
9	ON	OFF	OFF	ON	3300	23.8
8	ON	OFF	OFF	OFF	3060	21.7
7	OFF	ON	ON	ON	2810	19.8
6	OFF	ON	ON	OFF	2550	17.7
5	OFF	ON	OFF	ON	2290	15.7
4	OFF	ON	OFF	OFF	2020	13.8
3	OFF	OFF	ON	ON	1740	11.7
2	OFF	OFF	ON	OFF	1460	9.9
1	OFF	OFF	OFF	ON	1170	8.1
0	OFF	OFF	OFF	OFF	880	6.2