




Photometric test report

Family Spot 21 Licross®	Order number: 51SL64DB11B2C EAN: 4069025502711	LP number 59937_38
	Version housing, white aluminium, reflector, cover glass, transparent, wide distribution	serial documentation 21.05.2026
	Lamps LED 3000 K CRI ≥ 90 Controlgear ECG-DALI-Multilumen Setting factory setting: DIP-Step=7 Rated values Net luminous flux = 2730 lm Power consumption = 19.8 W Luminous efficacy = 137.9 lm/W	

Luminous intensity in cd/klm C180-0 **I_{max}: 1410 cd/klm**

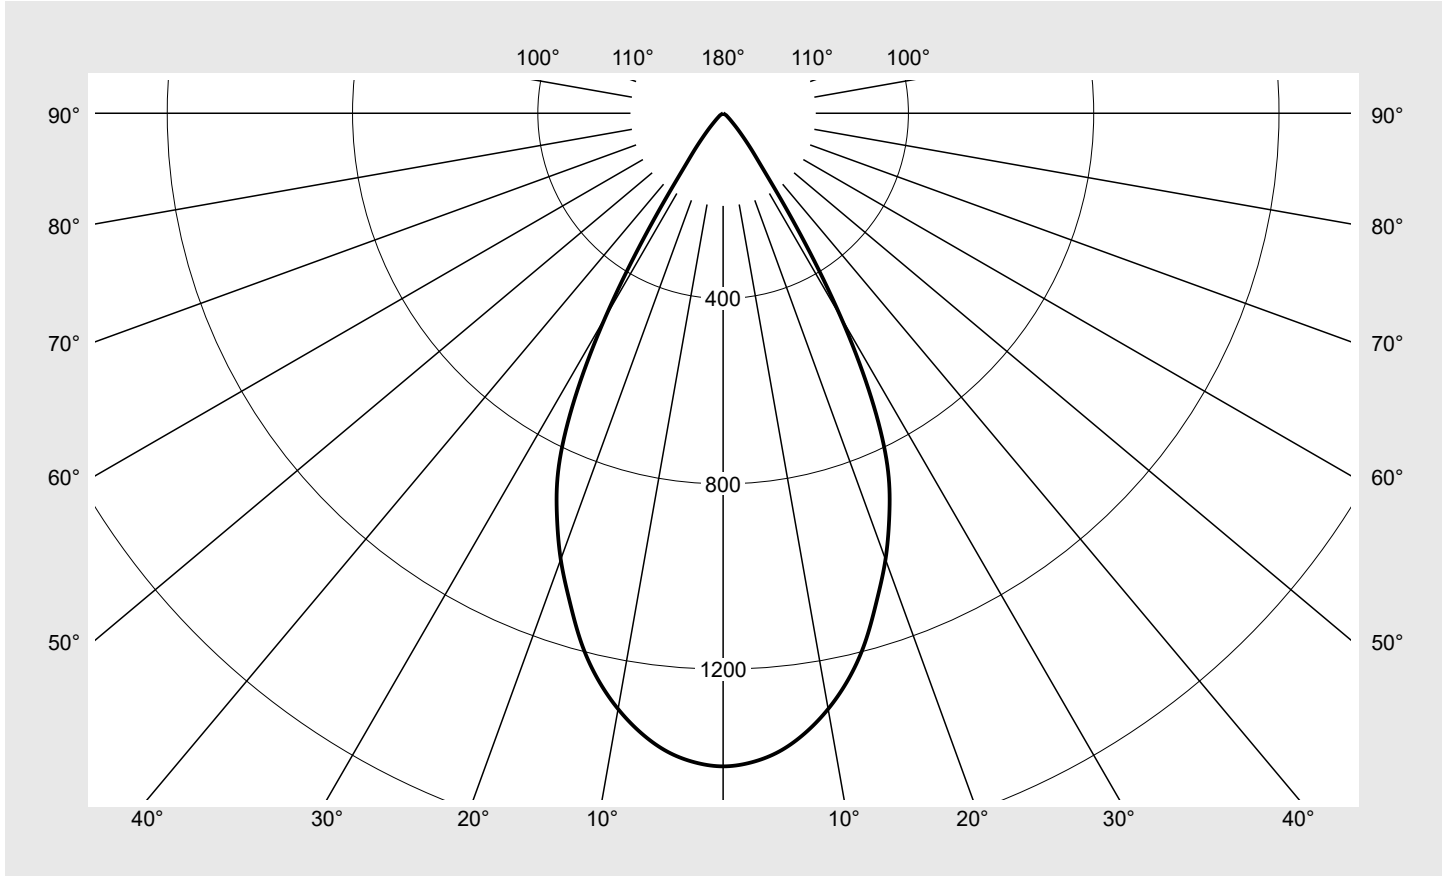

Classifications	
DIN 5040	A 7 0
CIE	N1=96 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Licross®	Order number: 51SL64DB11B2C EAN: 4069025502711	LP number 59937_38
-----------------------------------	---	------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0,0°	1409.8	2.1	2.1
2,5°	1402.5	16.8	18.9
5,0°	1383.3	33.0	51.9
7,5°	1350.1	48.3	100.2
10,0°	1305.8	62.2	162.4
12,5°	1250.9	74.2	236.6
15,0°	1183.2	84.0	320.6
17,5°	1103.1	90.9	411.5
20,0°	1024.9	96.1	507.6
22,5°	937.8	98.4	606.0
25,0°	838.9	97.2	703.2
27,5°	692.9	87.7	790.9
30,0°	508.4	69.7	860.5
32,5°	313.6	46.2	906.7
35,0°	170.0	26.7	933.5
37,5°	107.2	17.9	951.4
40,0°	69.8	12.3	963.7
42,5°	45.7	8.5	972.1
45,0°	29.8	5.8	977.9
47,5°	20.8	4.2	982.1
50,0°	15.0	3.2	985.3
52,5°	11.4	2.5	987.7
55,0°	9.1	2.0	989.8
57,5°	7.4	1.7	991.5
60,0°	6.2	1.5	993.0
62,5°	5.4	1.3	994.3
65,0°	4.6	1.1	995.4
67,5°	4.0	1.0	996.5
70,0°	3.5	0.9	997.4
72,5°	2.9	0.8	998.1
75,0°	2.3	0.6	998.7
77,5°	1.7	0.5	999.2
80,0°	1.3	0.4	999.5
82,5°	0.9	0.2	999.8
85,0°	0.6	0.2	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Licross®	Order number: 51SL64DB11B2C EAN: 4069025502711	LP number 59937_38
-----------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.9	20.0	19.3	20.4	20.7	18.9	20.0	19.3	20.4	20.7
	3H	18.9	19.8	19.3	20.2	20.5	18.9	19.8	19.3	20.2	20.5
	4H	18.8	19.7	19.2	20.1	20.4	18.8	19.7	19.2	20.1	20.4
	6H	18.8	19.6	19.2	19.9	20.3	18.8	19.6	19.2	19.9	20.3
	8H	18.9	19.5	19.3	19.9	20.3	18.9	19.5	19.3	19.9	20.3
	12H	18.9	19.4	19.3	19.8	20.2	18.9	19.4	19.3	19.8	20.2
4H	2H	18.7	19.6	19.1	20.0	20.4	18.7	19.6	19.1	20.0	20.4
	3H	18.7	19.4	19.1	19.8	20.2	18.7	19.4	19.1	19.8	20.2
	4H	18.6	19.3	19.1	19.7	20.2	18.6	19.3	19.1	19.7	20.2
	6H	18.6	19.2	19.1	19.6	20.1	18.6	19.2	19.1	19.6	20.1
	8H	18.6	19.1	19.1	19.5	20.0	18.6	19.1	19.1	19.5	20.0
	12H	18.6	19.0	19.1	19.4	20.0	18.6	19.0	19.1	19.4	20.0
8H	4H	18.6	19.0	19.0	19.5	20.0	18.6	19.0	19.0	19.5	20.0
	6H	18.5	18.9	19.0	19.4	19.9	18.5	18.9	19.0	19.4	19.9
	8H	18.5	18.8	19.0	19.3	19.8	18.5	18.8	19.0	19.3	19.8
	12H	18.5	18.7	19.0	19.2	19.8	18.5	18.7	19.0	19.2	19.8
12H	4H	18.6	18.9	19.1	19.4	19.9	18.6	18.9	19.1	19.4	19.9
	6H	18.5	18.8	19.0	19.3	19.8	18.5	18.8	19.0	19.3	19.8
	8H	18.5	18.7	19.0	19.2	19.8	18.5	18.7	19.0	19.2	19.8


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45,0°	21753.8
50,0°	12085.9
55,0°	8216.9
60,0°	6422.5
65,0°	5637.7
70,0°	5300.7
75,0°	4601.8
80,0°	3876.0
85,0°	3564.7

Photometric test report

Family Spot 21 Licross®	Order number: 51SL64DB11B2C EAN: 4069025502711	LP number 59937_38
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

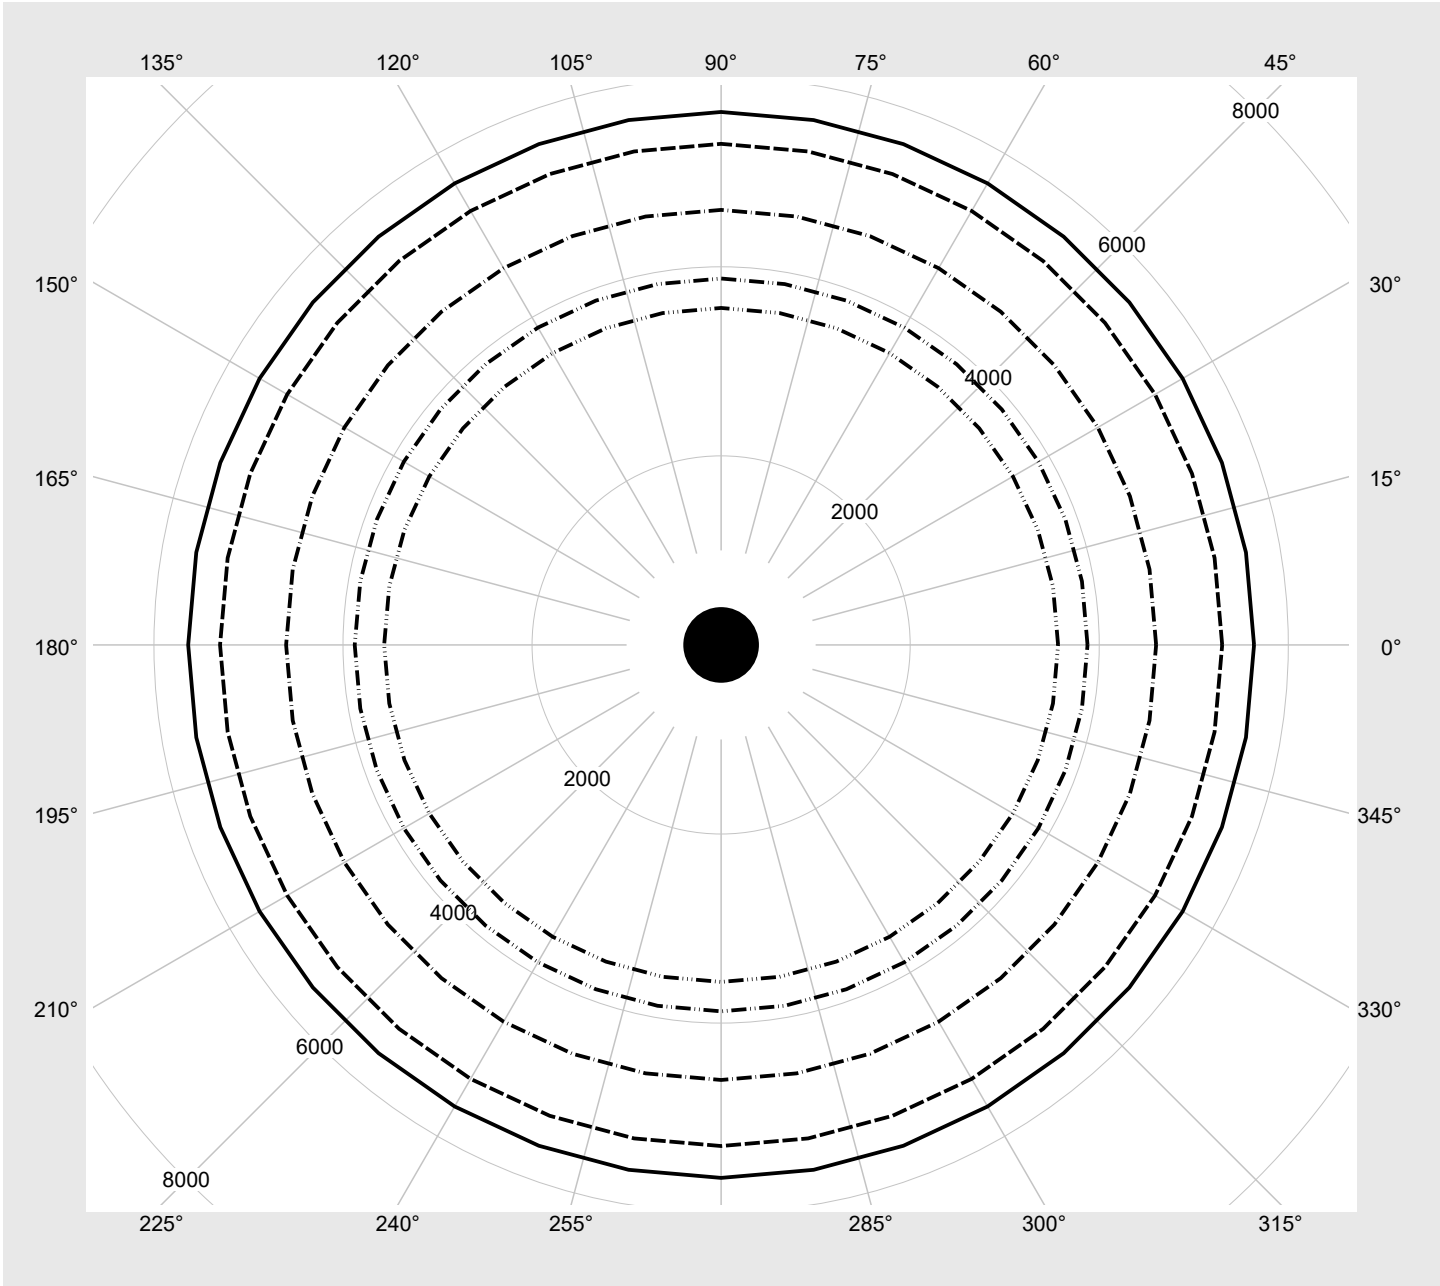

Photometric test report

Family Spot 21 Licross®	Order number: 51SL64DB11B2C EAN: 4069025502711	LP number 59937_38
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
11	ON	OFF	ON	ON	3680	28.1
10	ON	OFF	ON	OFF	3450	25.9
9	ON	OFF	OFF	ON	3220	23.8
8	ON	OFF	OFF	OFF	2980	21.7
7	OFF	ON	ON	ON	2730	19.8
6	OFF	ON	ON	OFF	2480	17.7
5	OFF	ON	OFF	ON	2230	15.7
4	OFF	ON	OFF	OFF	1960	13.8
3	OFF	OFF	ON	ON	1700	11.7
2	OFF	OFF	ON	OFF	1420	9.9
1	OFF	OFF	OFF	ON	1140	8.1
0	OFF	OFF	OFF	OFF	850	6.2