




# Photometric test report

<b>Family</b> <b>Spot 21 Licross®</b>	<b>Order number: 51SL64MB11B2C</b> <b>EAN: 4069025502742</b>	<b>LP number</b> <b>59937_34</b>
	<b>Version</b> housing, white aluminium, reflector, cover glass, transparent, wide distribution	<b>serial documentation</b> <b>21.05.2026</b>
	<b>Lamps</b> LED 3000 K   CRI ≥ 90 <b>Controlgear</b> ECG Multilumen <b>Setting</b> factory setting: DIP-Step=4 <b>Rated values</b> Net luminous flux = 2730 lm Power consumption = 18.5 W Luminous efficacy = 147.6 lm/W	

**Luminous intensity in cd/klm** C180-0 **I<sub>max</sub>: 1410 cd/klm**

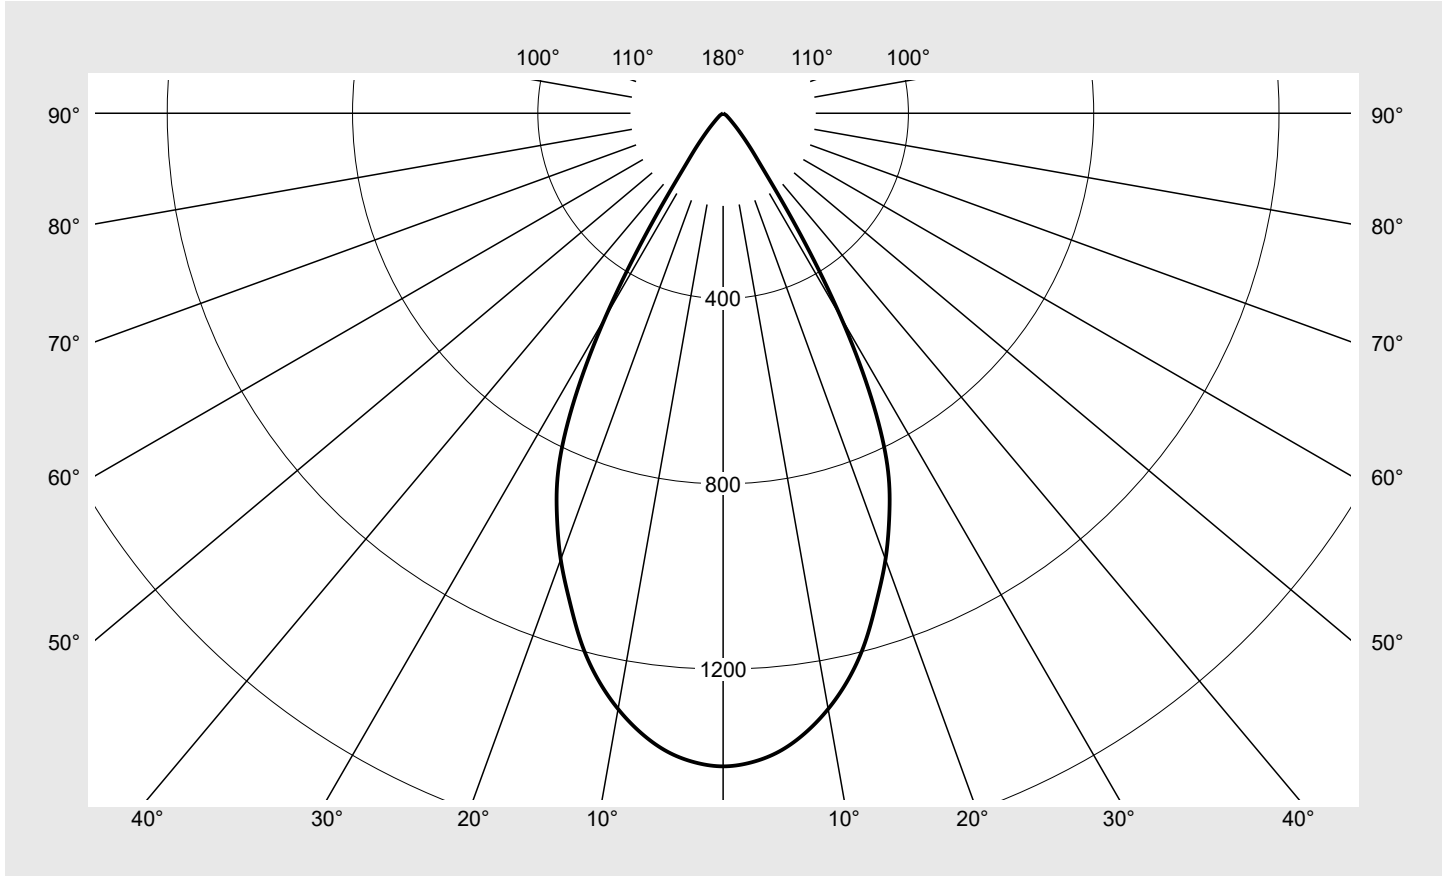

Classifications	
DIN 5040	A 7 0
CIE	N1=96 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> Spot 21 Licross®	<b>Order number: 51SL64MB11B2C</b> <b>EAN: 4069025502742</b>	<b>LP number</b> <b>59937_34</b>
-----------------------------------	---	-------------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>sITeco</b>
---	-----------------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	1409.8	2.1	2.1
2,5°	1402.5	16.8	18.9
5,0°	1383.3	33.0	51.9
7,5°	1350.1	48.3	100.2
10,0°	1305.8	62.2	162.4
12,5°	1250.9	74.2	236.6
15,0°	1183.2	84.0	320.6
17,5°	1103.1	90.9	411.5
20,0°	1024.9	96.1	507.6
22,5°	937.8	98.4	606.0
25,0°	838.9	97.2	703.2
27,5°	692.9	87.7	790.9
30,0°	508.4	69.7	860.5
32,5°	313.6	46.2	906.7
35,0°	170.0	26.7	933.5
37,5°	107.2	17.9	951.4
40,0°	69.8	12.3	963.7
42,5°	45.7	8.5	972.1
45,0°	29.8	5.8	977.9
47,5°	20.8	4.2	982.1
50,0°	15.0	3.2	985.3
52,5°	11.4	2.5	987.7
55,0°	9.1	2.0	989.8
57,5°	7.4	1.7	991.5
60,0°	6.2	1.5	993.0
62,5°	5.4	1.3	994.3
65,0°	4.6	1.1	995.4
67,5°	4.0	1.0	996.5
70,0°	3.5	0.9	997.4
72,5°	2.9	0.8	998.1
75,0°	2.3	0.6	998.7
77,5°	1.7	0.5	999.2
80,0°	1.3	0.4	999.5
82,5°	0.9	0.2	999.8
85,0°	0.6	0.2	999.9
87,5°	0.2	0.1	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

Family <b>Spot 21 Licross®</b>	Order number: <b>51SL64MB11B2C</b> EAN: <b>4069025502742</b>	LP number <b>59937_34</b>
-----------------------------------	---	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.9	20.0	19.3	20.4	20.7	18.9	20.0	19.3	20.4	20.7
	3H	18.9	19.8	19.3	20.2	20.5	18.9	19.8	19.3	20.2	20.5
	4H	18.8	19.7	19.2	20.1	20.4	18.8	19.7	19.2	20.1	20.4
	6H	18.8	19.6	19.2	19.9	20.3	18.8	19.6	19.2	19.9	20.3
	8H	18.9	19.5	19.3	19.9	20.3	18.9	19.5	19.3	19.9	20.3
	12H	18.9	19.4	19.3	19.8	20.2	18.9	19.4	19.3	19.8	20.2
4H	2H	18.7	19.6	19.1	20.0	20.4	18.7	19.6	19.1	20.0	20.4
	3H	18.7	19.4	19.1	19.8	20.2	18.7	19.4	19.1	19.8	20.2
	4H	18.6	19.3	19.1	19.7	20.2	18.6	19.3	19.1	19.7	20.2
	6H	18.6	19.2	19.1	19.6	20.1	18.6	19.2	19.1	19.6	20.1
	8H	18.6	19.1	19.1	19.5	20.0	18.6	19.1	19.1	19.5	20.0
	12H	18.6	19.0	19.1	19.4	20.0	18.6	19.0	19.1	19.4	20.0
8H	4H	18.6	19.0	19.0	19.5	20.0	18.6	19.0	19.0	19.5	20.0
	6H	18.5	18.9	19.0	19.4	19.9	18.5	18.9	19.0	19.4	19.9
	8H	18.5	18.8	19.0	19.3	19.8	18.5	18.8	19.0	19.3	19.8
	12H	18.5	18.7	19.0	19.2	19.8	18.5	18.7	19.0	19.2	19.8
12H	4H	18.6	18.9	19.1	19.4	19.9	18.6	18.9	19.1	19.4	19.9
	6H	18.5	18.8	19.0	19.3	19.8	18.5	18.8	19.0	19.3	19.8
	8H	18.5	18.7	19.0	19.2	19.8	18.5	18.7	19.0	19.2	19.8


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm: D = 82</b>
------------------------	---	---

<b>C-planes</b>	<b>0°</b>
$\gamma$	<b>Luminance in cd/m²</b>
45,0°	21753.8
50,0°	12085.9
55,0°	8216.9
60,0°	6422.5
65,0°	5637.7
70,0°	5300.7
75,0°	4601.8
80,0°	3876.0
85,0°	3564.7

**Photometric test report**

<b>Family</b> Spot 21 Licross®	<b>Order number: 51SL64MB11B2C</b> <b>EAN: 4069025502742</b>	<b>LP number</b> 59937_34
-----------------------------------	---	------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

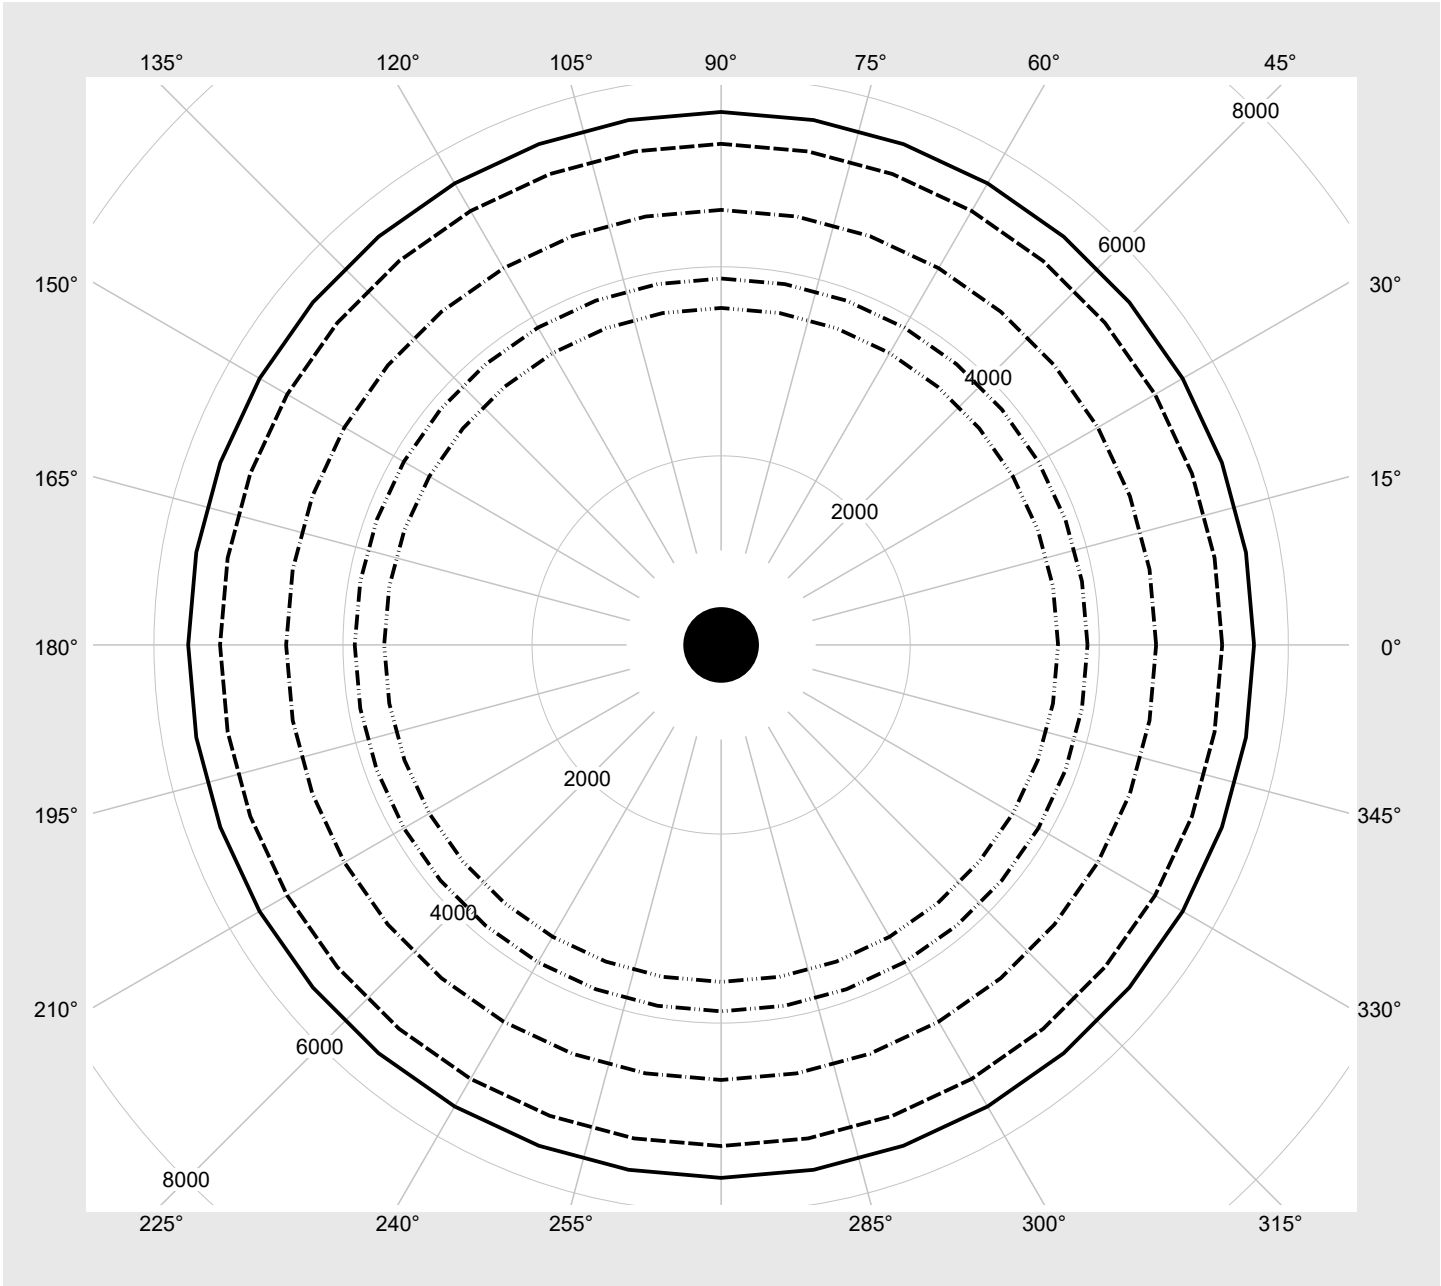

## Photometric test report

Family <b>Spot 21 Licross®</b>	Order number: <b>51SL64MB11B2C</b> EAN: <b>4069025502742</b>	LP number <b>59937_34</b>
-----------------------------------	---	------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3680	26.5
1	ON	OFF	OFF	3450	24.5
2	OFF	ON	OFF	3220	22.5
3	ON	ON	OFF	2980	20.5
4	OFF	OFF	ON	2730	18.5
5	ON	OFF	ON	2480	16.6
6	OFF	ON	ON	2230	14.8
7	ON	ON	ON	1960	12.9