

Photometric test report

Family
Spot 21 Modario®

Order number: 51SM14DB11A2C
EAN: 4069025531391

LP number
59886_15



Version reflector, cover, polycarbonate, rotationally symmetrical wide distribution

Lamps LED 2700 K | CRI ≥ 90

Controlgear ECG-DALI-Multilumen

Setting factory setting: DIP-Step=10

Rated values Net luminous flux = 3790 lm
Power consumption = 31.0 W
Luminous efficacy = 122.3 lm/W


serial
documentation
21.05.2026

sITeco

Luminous intensity in cd/klm

C180-0

Imax: 2084 cd/klm

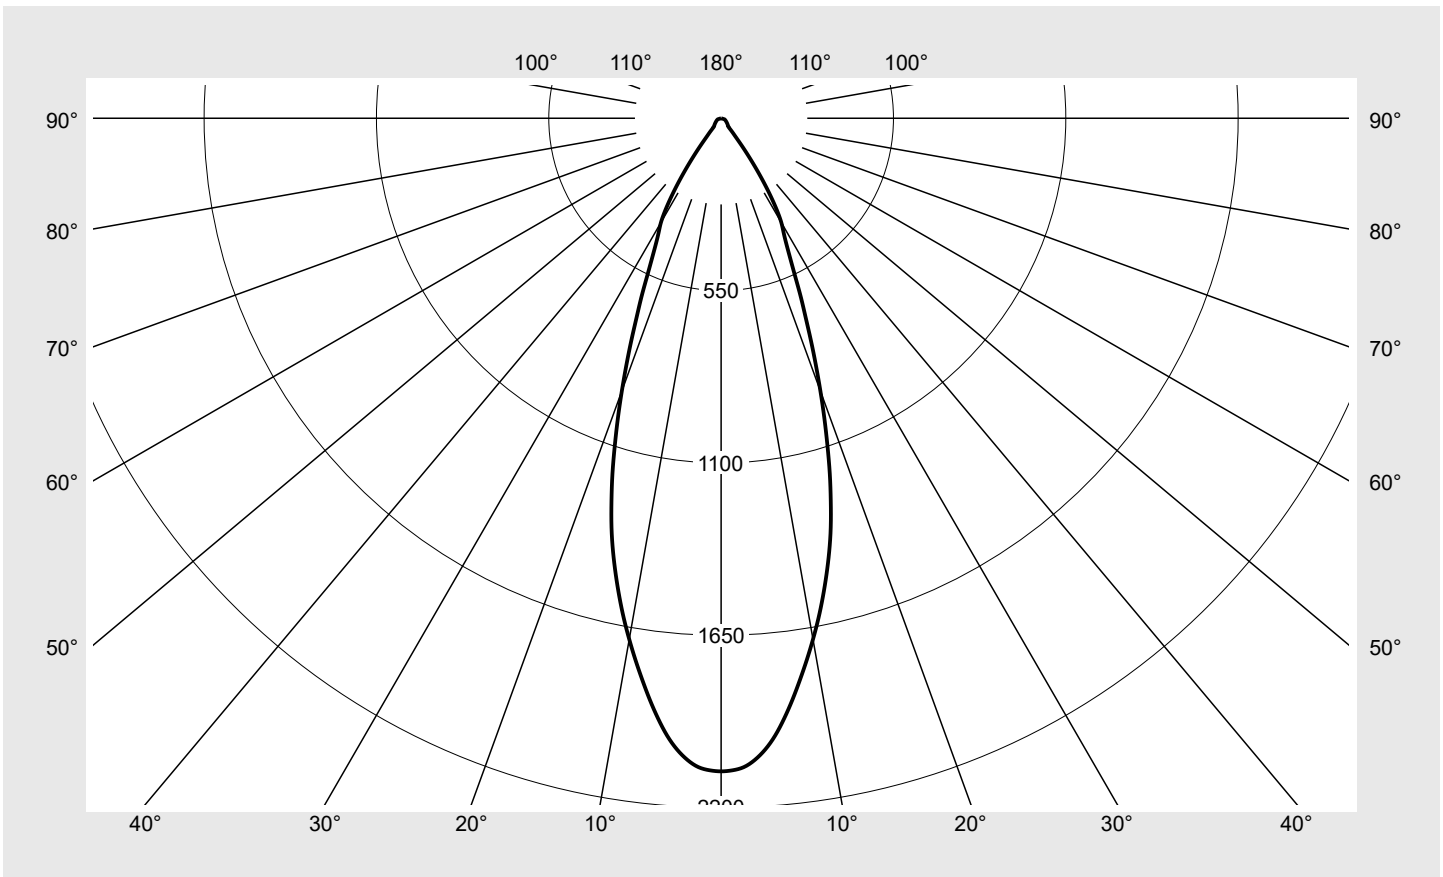

Classifications

DIN 5040 A 7 0
CIE N1=93 N2=97 N3=99
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Modario®	Order number: 51SM14DB11A2C EAN: 4069025531391	LP number 59886_15
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm Luminous flux in lm/klm		
0°	2084.2	0.5	0.5
1°	2081.2	4.0	4.5
2°	2072.1	7.9	12.4
3°	2050.8	11.8	24.2
4°	2019.3	15.4	39.6
5°	1977.7	18.9	58.5
6°	1925.9	22.1	80.6
7°	1869.1	25.0	105.6
8°	1809.3	27.6	133.2
9°	1749.4	30.0	163.2
10°	1688.5	32.2	195.4
11°	1626.6	34.0	229.4
12°	1561.7	35.6	265.0
13°	1494.7	36.9	301.9
14°	1425.7	37.8	339.7
15°	1351.6	38.4	378.1
16°	1269.4	38.4	416.4
17°	1186.2	38.0	454.5
18°	1097.9	37.2	491.7
19°	1011.8	36.1	527.8
20°	926.4	34.7	562.5
21°	843.7	33.2	595.7
22°	765.0	31.4	627.1
23°	690.3	29.6	656.7
24°	626.6	27.9	684.6
25°	563.1	26.1	710.7
26°	510.4	24.5	735.3
27°	467.8	23.3	758.6
28°	433.7	22.3	780.9
29°	407.7	21.7	802.6
30°	384.1	21.1	823.6
31°	352.2	19.9	843.5
32°	313.7	18.2	861.7
33°	272.0	16.2	878.0
34°	229.5	14.1	892.1
35°	187.4	11.8	903.9
36°	146.9	9.5	913.3
37°	109.3	7.2	920.5
38°	76.0	5.1	925.7
39°	57.5	4.0	929.6
40°	39.2	2.8	932.4
41°	36.2	2.6	935.0
42°	33.7	2.5	937.5
43°	32.3	2.4	939.9
44°	31.1	2.4	942.3
45°	29.8	2.3	944.6
46°	28.8	2.3	946.8

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm Luminous flux in lm/klm		
47°	27.8	2.2	949.1
48°	26.8	2.2	951.3
49°	25.9	2.1	953.4
50°	24.9	2.1	955.5
51°	24.0	2.0	957.5
52°	23.1	2.0	959.5
53°	22.3	2.0	961.5
54°	21.5	1.9	963.4
55°	20.8	1.9	965.3
56°	20.0	1.8	967.1
57°	19.4	1.8	968.9
58°	18.7	1.7	970.6
59°	18.1	1.7	972.3
60°	17.5	1.7	974.0
61°	17.0	1.6	975.6
62°	16.4	1.6	977.2
63°	15.9	1.6	978.8
64°	15.4	1.5	980.3
65°	14.9	1.5	981.8
66°	14.4	1.4	983.2
67°	13.9	1.4	984.6
68°	13.4	1.4	986.0
69°	12.9	1.3	987.3
70°	12.4	1.3	988.6
71°	11.9	1.2	989.8
72°	11.4	1.2	991.0
73°	10.9	1.1	992.1
74°	10.4	1.1	993.2
75°	9.7	1.0	994.3
76°	9.0	1.0	995.2
77°	7.5	0.8	996.0
78°	6.3	0.7	996.7
79°	5.7	0.6	997.3
80°	5.0	0.5	997.9
81°	4.4	0.5	998.3
82°	3.8	0.4	998.7
83°	3.2	0.3	999.1
84°	2.6	0.3	999.4
85°	2.1	0.2	999.6
86°	1.6	0.2	999.8
87°	1.1	0.1	999.9
88°	0.7	0.1	1000.0
89°	0.2	0.0	1000.0
90°	0.1	0.0	1000.0

Photometric test report

Family Spot 21 Modario®	Order number: 51SM14DB11A2C EAN: 4069025531391	LP number 59886_15
-----------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.4	21.5	20.7	21.8	22.1	20.4	21.5	20.7	21.8	22.1
	3H	21.0	22.0	21.4	22.3	22.7	21.0	22.0	21.4	22.3	22.7
	4H	21.5	22.3	21.9	22.7	23.1	21.5	22.3	21.9	22.7	23.1
	6H	21.7	22.5	22.1	22.9	23.3	21.7	22.5	22.1	22.9	23.3
	8H	21.9	22.5	22.3	22.9	23.3	21.9	22.5	22.3	22.9	23.3
	12H	21.9	22.5	22.4	22.9	23.3	21.9	22.5	22.4	22.9	23.3
4H	2H	20.5	21.4	20.9	21.7	22.1	20.5	21.4	20.9	21.7	22.1
	3H	21.4	22.1	21.8	22.5	22.9	21.4	22.1	21.8	22.5	22.9
	4H	22.0	22.6	22.4	23.0	23.5	22.0	22.6	22.4	23.0	23.5
	6H	22.3	22.9	22.8	23.3	23.8	22.3	22.9	22.8	23.3	23.8
	8H	22.5	22.9	22.9	23.4	23.9	22.5	22.9	22.9	23.4	23.9
	12H	22.5	22.9	23.0	23.4	23.9	22.5	22.9	23.0	23.4	23.9
8H	4H	22.2	22.6	22.6	23.1	23.6	22.2	22.6	22.6	23.1	23.6
	6H	22.6	23.0	23.1	23.4	24.0	22.6	23.0	23.1	23.4	24.0
	8H	22.7	23.1	23.2	23.6	24.1	22.7	23.1	23.2	23.6	24.1
	12H	22.9	23.1	23.4	23.6	24.2	22.9	23.1	23.4	23.6	24.2
12H	4H	22.2	22.6	22.7	23.0	23.5	22.2	22.6	22.7	23.0	23.5
	6H	22.6	22.9	23.1	23.4	23.9	22.6	22.9	23.1	23.4	23.9
	8H	22.8	23.1	23.3	23.6	24.1	22.8	23.1	23.3	23.6	24.1


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 85
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45°	28150.5
50°	25842.7
55°	24210.0
60°	23368.5
65°	23590.4
70°	24234.4
75°	25155.4
80°	19381.4
85°	16031.6

Photometric test report

Family Spot 21 Modario®	Order number: 51SM14DB11A2C EAN: 4069025531391	LP number 59886_15
-----------------------------------	---	------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

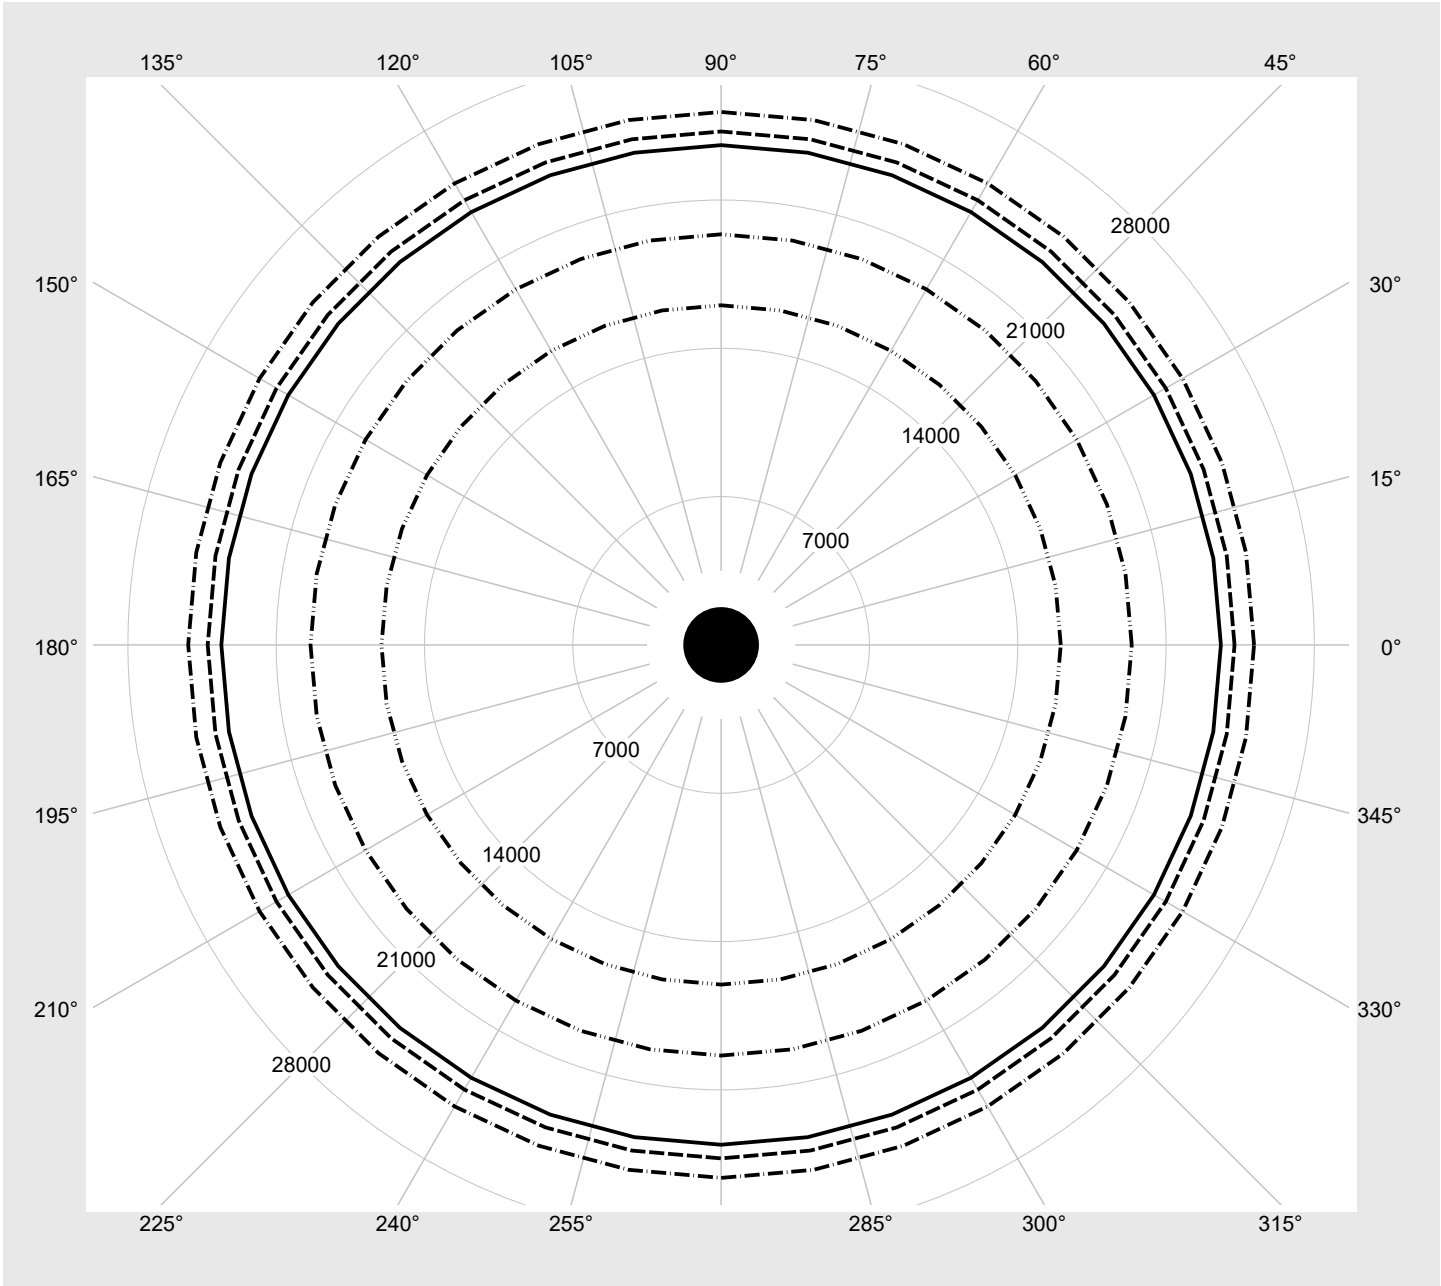

Photometric test report

Family Spot 21 Modario®	Order number: 51SM14DB11A2C EAN: 4069025531391	LP number 59886_15
-----------------------------------	---	------------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	4760	41.4
14	ON	ON	ON	OFF	4580	39.3
13	ON	ON	OFF	ON	4390	37.1
12	ON	ON	OFF	OFF	4190	35.1
11	ON	OFF	ON	ON	4000	33.0
10	ON	OFF	ON	OFF	3790	31.0
9	ON	OFF	OFF	ON	3580	28.9
8	ON	OFF	OFF	OFF	3370	26.9
7	OFF	ON	ON	ON	3150	24.9
6	OFF	ON	ON	OFF	2930	22.9
5	OFF	ON	OFF	ON	2700	21.0
4	OFF	ON	OFF	OFF	2480	19.0
3	OFF	OFF	ON	ON	2250	17.2
2	OFF	OFF	ON	OFF	2020	15.3
1	OFF	OFF	OFF	ON	1780	13.5
0	OFF	OFF	OFF	OFF	1540	11.7