

Photometric test report

Family
Highbay 11 Xtreme

Order number: 51HF61DB4QMA
EAN: 4058352919774

LP number
59307_28

serial
documentation
15.06.2026

siteco



Version narrow distribution, toughened safety glass, chain suspension

Lamps LED 4000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 37300 lm
Power consumption = 193.8 W
Luminous efficacy = 192.5 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 2896 cd/klm

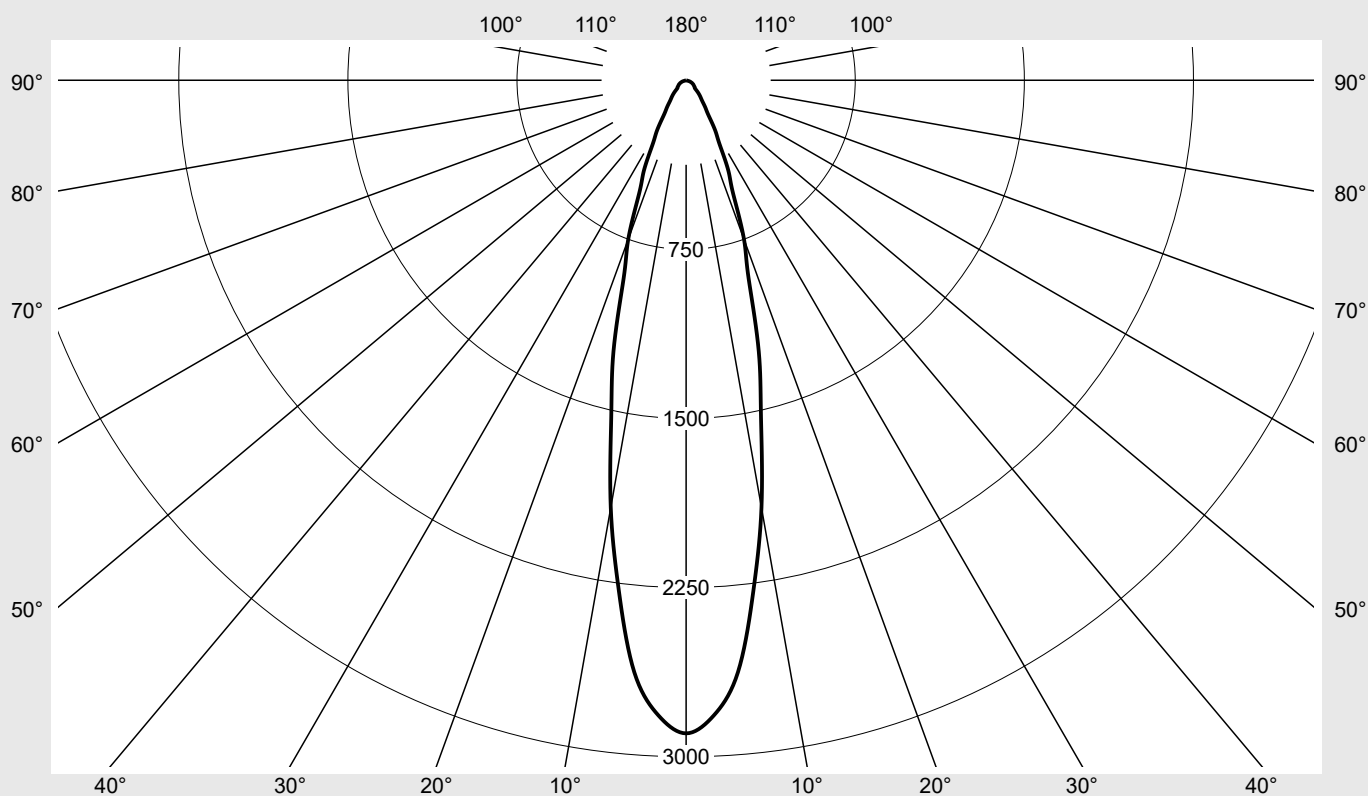

Classifications

DIN 5040 A 7 0
CIE N1=88 N2=96 N3=99
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 11 Xtreme	Order number: 51HF61DB4QMA EAN: 4058352919774	LP number 59307_28
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0,0°	2896.3	4.3	4.3
2,5°	2819.4	33.7	38.0
5,0°	2635.7	63.0	101.0
7,5°	2284.5	81.7	182.8
10,0°	1924.6	91.6	274.4
12,5°	1534.7	91.1	365.4
15,0°	1244.7	88.3	453.7
17,5°	921.9	76.0	529.7
20,0°	750.6	70.4	600.1
22,5°	545.9	57.3	657.4
25,0°	444.2	51.5	708.8
27,5°	324.2	41.0	749.9
30,0°	259.7	35.6	785.5
32,5°	186.5	27.5	812.9
35,0°	150.0	23.6	836.5
37,5°	119.7	20.0	856.5
40,0°	101.4	17.9	874.3
42,5°	86.4	16.0	890.3
45,0°	69.3	13.4	903.8
47,5°	53.2	10.7	914.5
50,0°	50.3	10.6	925.1
52,5°	46.2	10.0	935.1
55,0°	42.5	9.5	944.7
57,5°	39.0	9.0	953.7
60,0°	36.5	8.7	962.4
62,5°	32.1	7.8	970.2
65,0°	28.9	7.2	977.4
67,5°	23.8	6.0	983.4
70,0°	20.2	5.2	988.6
72,5°	15.0	3.9	992.5
75,0°	11.9	3.1	995.6
77,5°	7.9	2.1	997.8
80,0°	5.0	1.4	999.1
82,5°	2.2	0.6	999.7
85,0°	0.8	0.2	999.9
87,5°	0.3	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Highbay 11 Xtreme			Order number: 51HF61DB4QMA EAN: 4058352919774							LP number 59307_28	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	17.2	18.4	17.6	18.7	19.0	17.2	18.4	17.6	18.7	19.0
	3H	18.3	19.3	18.7	19.6	20.0	18.3	19.3	18.7	19.6	20.0
	4H	18.6	19.5	19.0	19.9	20.2	18.6	19.5	19.0	19.9	20.2
	6H	18.7	19.5	19.1	19.9	20.3	18.7	19.5	19.1	19.9	20.3
	8H	18.8	19.5	19.2	19.9	20.3	18.8	19.5	19.2	19.9	20.3
	12H	18.8	19.4	19.2	19.8	20.2	18.8	19.4	19.2	19.8	20.2
4H	2H	17.7	18.6	18.1	19.0	19.3	17.7	18.6	18.1	19.0	19.3
	3H	18.9	19.7	19.3	20.0	20.5	18.9	19.7	19.3	20.0	20.5
	4H	19.3	19.9	19.7	20.4	20.8	19.3	19.9	19.7	20.4	20.8
	6H	19.4	20.0	19.9	20.4	20.9	19.4	20.0	19.9	20.4	20.9
	8H	19.4	19.9	19.9	20.4	20.9	19.4	19.9	19.9	20.4	20.9
	12H	19.4	19.8	19.9	20.3	20.8	19.4	19.8	19.9	20.3	20.8
8H	4H	19.4	19.9	19.9	20.3	20.8	19.4	19.9	19.9	20.3	20.8
	6H	19.6	20.0	20.1	20.5	21.0	19.6	20.0	20.1	20.5	21.0
	8H	19.6	19.9	20.1	20.4	20.9	19.6	19.9	20.1	20.4	20.9
	12H	19.5	19.8	20.0	20.3	20.9	19.5	19.8	20.0	20.3	20.9
12H	4H	19.4	19.8	19.9	20.2	20.7	19.4	19.8	19.9	20.2	20.7
	6H	19.5	19.9	20.1	20.4	20.9	19.5	19.9	20.1	20.4	20.9
	8H	19.5	19.8	20.1	20.3	20.9	19.5	19.8	20.1	20.3	20.9

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 545 B = 470
C-planes	0°			
γ	Luminance in cd/m²			
45,0°	14278.3			
50,0°	11389.6			
55,0°	10793.6			
60,0°	10635.1			
65,0°	9972.6			
70,0°	8582.4			
75,0°	6686.8			
80,0°	4213.0			
85,0°	1273.1			

Photometric test report

Family
Highbay 11 Xtreme

Order number: 51HF61DB4QMA
EAN: 4058352919774

LP number
59307_28

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

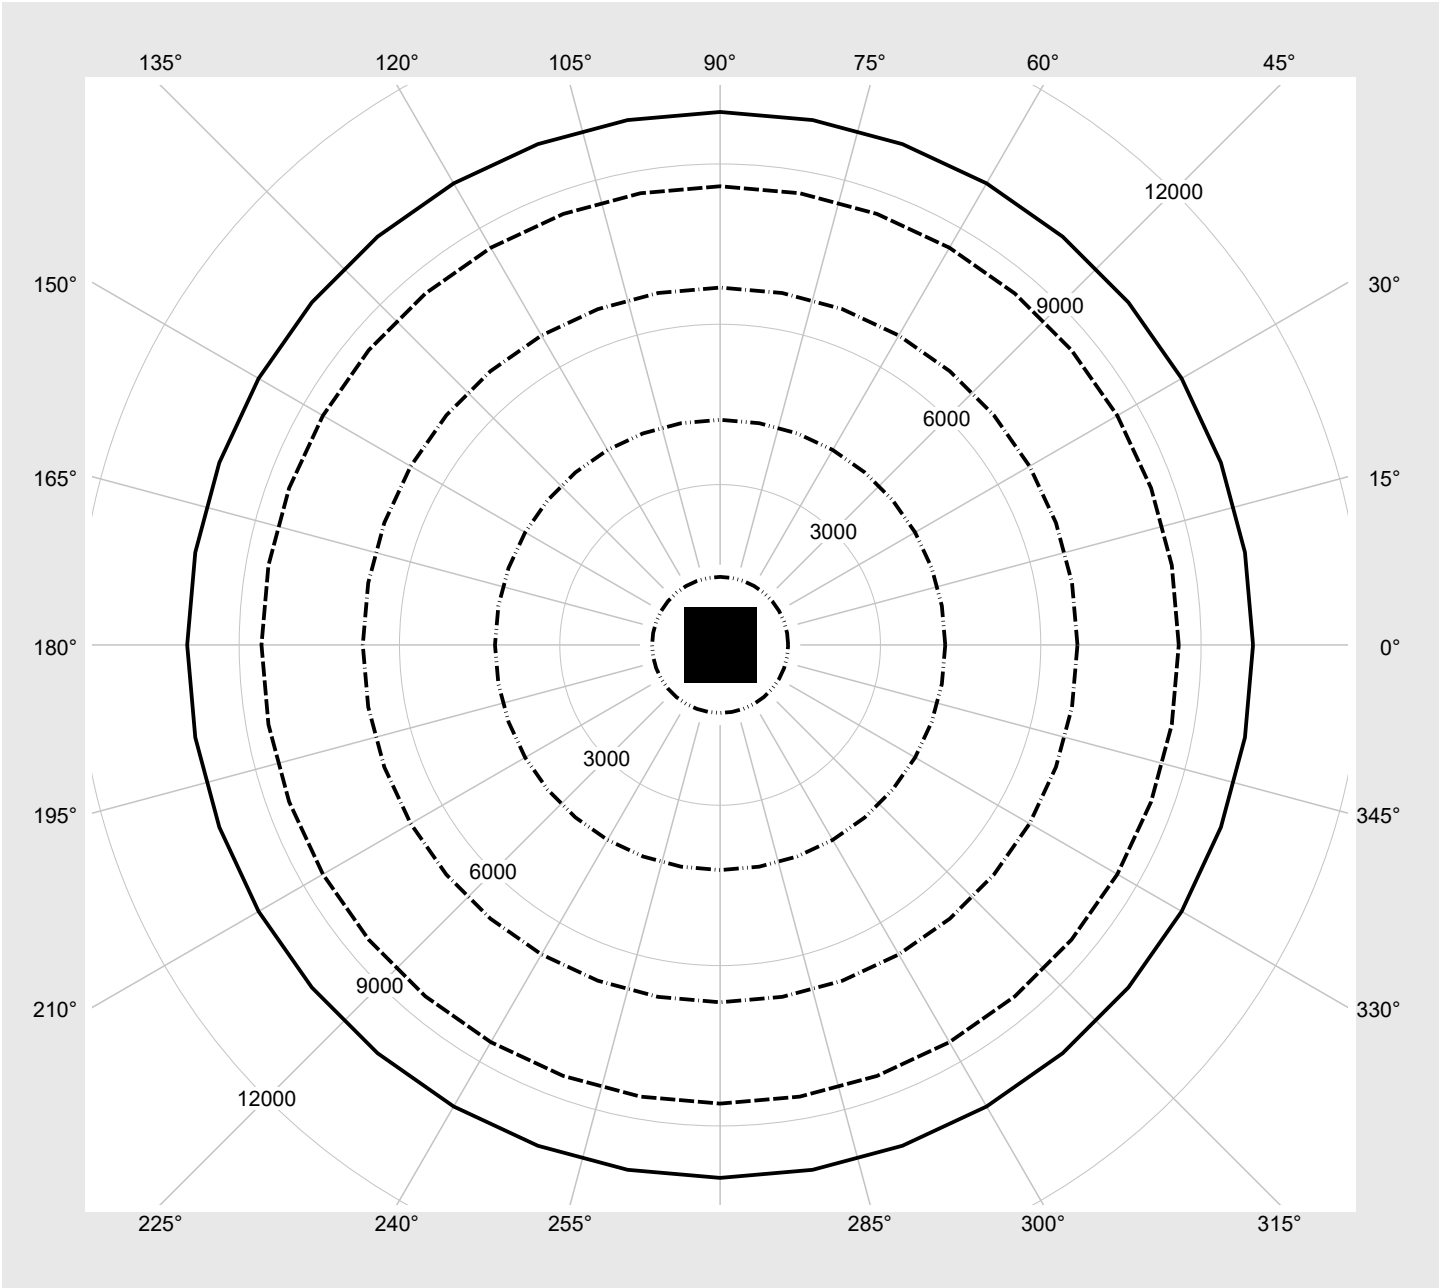

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Highbay 11 Xtreme	Order number: 51HF61DB4QMA EAN: 4058352919774	LP number 59307_28
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	37300	193.8
95	241	252	35499	183.9
90	227	250	33542	173.4
85	214	248	31712	163.8
80	201	245	29879	154.1
75	188	243	28027	144.5
70	175	240	26167	134.7
65	162	238	24296	125.2
60	149	234	22408	115.6
55	136	231	20518	106.2
50	123	227	18619	96.7
45	111	224	16841	87.9
40	98	219	14921	78.4
35	85	214	12987	69.1
30	73	208	11188	60.1
25	61	202	9373	50.9
20	48	193	7404	41.7
15	36	182	5572	32.9
10	24	168	3730	23.9
5	12	142	1878	15.7
3	7	122	1104	11.4

Dimming levels table		environmental temperature: 70°C
----------------------	--	---------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	34900	191.9
95	240	252	33093	181.4
90	227	250	31400	171.7
85	214	248	29695	162.1
80	201	245	27986	152.5
75	187	243	26125	142.3
70	174	240	24390	132.5
65	161	237	22642	123.2
60	148	234	20879	113.7
55	136	231	19247	105.1
50	123	227	17472	95.7
45	110	223	15671	86.3
40	98	219	14013	77.6
35	85	214	12200	68.4
30	73	208	10515	59.5
25	60	201	8671	49.5
20	48	193	6965	41.2
15	36	182	5243	32.6
10	24	168	3513	23.6
5	12	142	1770	15.5
3	7	122	1040	11.3

Photometric test report

Family Highbay 11 Xtreme	Order number: 51HF61DB4QMA EAN: 4058352919774	LP number 59307_28
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	37300.0	193.8
70.0	34900.0	191.9