

Photometric test report

Family
Silica® 21

Order number: **51MX20DA32WB**
EAN: **4058352898543**

LP number
60289_75

serial
documentation
23.06.2026

siteco

Version surface-mounted luminaire, with homogeneous illumination, cover, opal, direct distribution, extremely wide distribution

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 2400 lm
Power consumption = 16.1 W
Luminous efficacy = 149.1 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 356 cd/klm

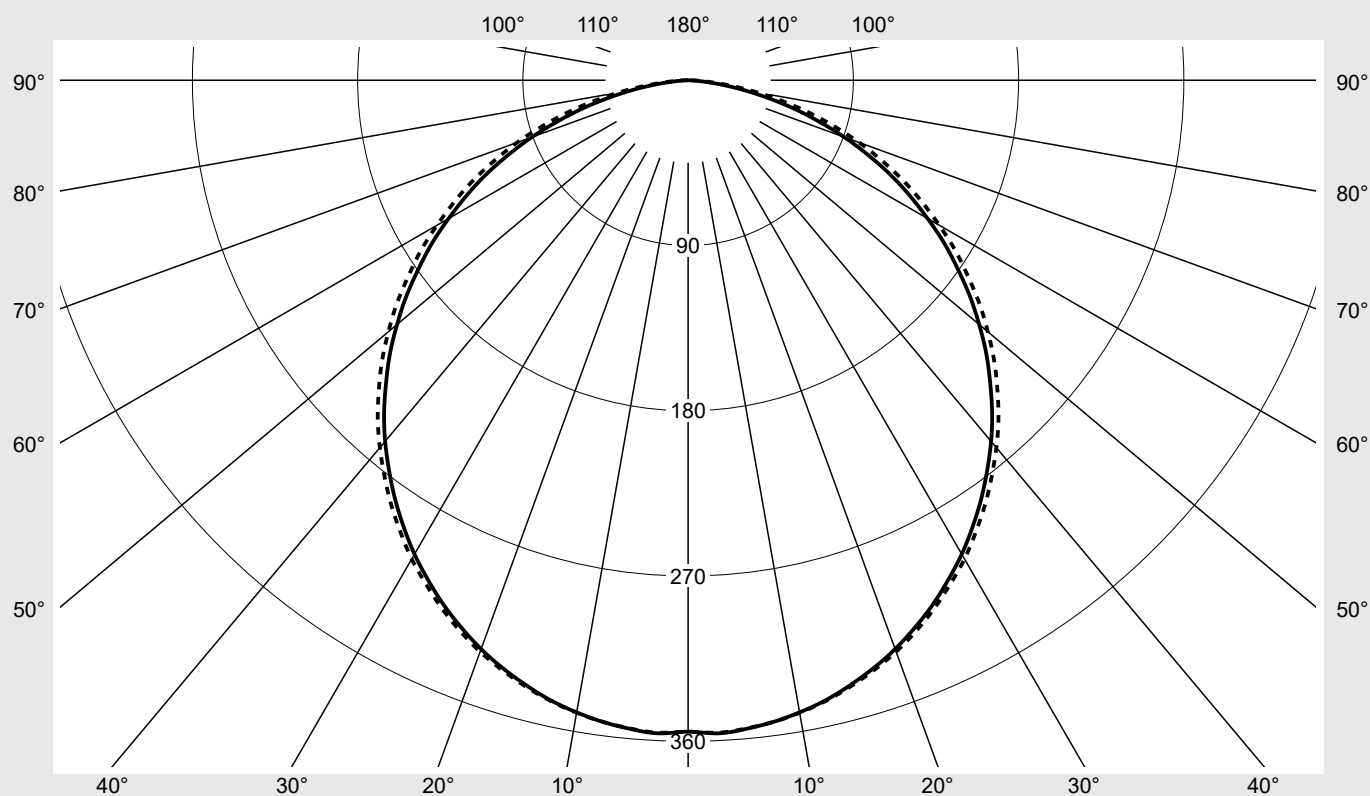

Classifications

DIN 5040 A 4 0
CIE N1=48 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX20DA32WB EAN: 4058352898543	LP number 60289_75
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	354.8	354.8	354.8	354.8	354.8	354.8	354.8	0.5	0.5
2,5°	356.1	354.8	352.5	354.0	355.5	355.5	355.7	4.2	4.8
5,0°	354.8	353.6	351.3	352.8	354.4	354.3	354.5	8.4	13.2
7,5°	352.6	351.6	349.3	350.8	352.4	352.4	352.6	12.6	25.8
10,0°	349.6	348.7	346.4	347.9	349.6	349.5	349.8	16.6	42.4
12,5°	345.9	345.1	342.8	344.3	346.0	346.1	346.3	20.5	62.9
15,0°	341.1	340.5	338.2	339.7	341.5	341.5	341.8	24.2	87.0
17,5°	335.7	335.3	333.0	334.5	336.3	336.5	336.8	27.6	114.7
20,0°	329.7	329.5	327.3	328.8	330.6	330.8	331.2	30.9	145.6
22,5°	322.7	322.7	320.5	321.8	323.8	324.1	324.6	33.9	179.4
25,0°	315.2	315.4	313.2	314.5	316.5	316.9	317.4	36.5	216.0
27,5°	306.8	307.2	305.0	306.3	308.3	308.8	309.3	38.9	254.9
30,0°	298.1	298.7	296.7	297.9	300.0	300.4	301.1	41.0	295.8
32,5°	288.4	289.2	287.3	288.3	290.3	291.0	291.7	42.6	338.5
35,0°	278.3	279.3	277.6	278.6	280.5	281.2	282.0	44.0	382.4
37,5°	267.6	268.7	267.4	268.1	269.9	270.9	271.7	44.9	427.3
40,0°	256.7	257.8	256.8	257.2	259.2	260.2	261.2	45.5	472.8
42,5°	245.1	246.2	245.5	245.9	247.7	248.9	250.2	45.7	518.6
45,0°	232.6	233.7	233.4	233.7	235.5	236.5	238.2	45.5	564.1
47,5°	220.2	221.3	221.5	221.8	223.4	224.3	226.1	45.0	609.1
50,0°	206.9	207.8	208.6	208.9	210.4	211.2	213.1	44.0	653.1
52,5°	193.6	194.4	195.5	195.9	197.4	198.1	200.0	42.7	695.8
55,0°	179.3	180.3	181.6	182.1	183.6	184.1	186.0	41.0	736.7
57,5°	165.5	166.5	167.9	168.6	170.2	170.7	172.6	39.0	775.8
60,0°	150.7	151.9	153.3	154.2	155.7	156.4	157.9	36.6	812.4
62,5°	136.1	137.6	139.1	140.1	141.6	142.5	143.6	34.1	846.5
65,0°	121.4	123.0	124.5	125.7	127.6	128.3	129.2	31.2	877.7
67,5°	105.8	107.6	108.8	110.4	112.5	113.4	114.1	28.0	905.7
70,0°	90.4	92.3	93.2	95.3	97.3	98.6	99.1	24.5	930.2
72,5°	74.6	76.3	77.1	79.6	81.4	83.0	83.4	20.8	951.0
75,0°	59.7	61.0	61.9	64.2	66.4	67.9	68.3	17.0	968.0
77,5°	44.5	45.5	46.7	48.5	50.7	52.4	53.0	13.0	981.0
80,0°	30.9	31.6	32.8	34.2	36.1	37.8	38.5	9.3	990.3
82,5°	18.3	18.8	19.8	20.9	22.6	24.0	24.6	5.8	996.1
85,0°	8.6	8.8	9.5	10.4	11.4	12.6	13.2	2.9	999.0
87,5°	2.4	2.6	2.9	3.4	4.1	4.7	5.1	1.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21		Order number: 51MX20DA32WB EAN: 4058352898543							LP number 60289_75	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	21.2	22.8	21.5	23.2	23.5	21.3	23.0	21.7	23.3
	3H	22.7	24.2	23.1	24.6	24.9	23.0	24.5	23.4	24.8
	4H	23.3	24.7	23.7	25.0	25.4	23.6	25.1	24.0	25.4
	6H	23.6	24.9	24.0	25.3	25.7	24.1	25.4	24.5	25.8
	8H	23.7	25.0	24.1	25.3	25.7	24.2	25.5	24.7	25.9
	12H	23.7	24.9	24.2	25.3	25.7	24.3	25.5	24.7	25.9
4H	2H	21.9	23.4	22.3	23.7	24.1	22.1	23.5	22.5	23.9
	3H	23.7	24.9	24.1	25.3	25.7	23.9	25.1	24.3	25.5
	4H	24.3	25.4	24.8	25.8	26.3	24.7	25.8	25.1	26.2
	6H	24.8	25.7	25.2	26.1	26.6	25.2	26.2	25.7	26.6
	8H	24.9	25.7	25.3	26.2	26.7	25.4	26.3	25.9	26.7
	12H	24.9	25.7	25.4	26.2	26.7	25.5	26.3	26.0	26.7
8H	4H	24.7	25.5	25.1	26.0	26.4	25.0	25.8	25.4	26.3
	6H	25.2	25.9	25.7	26.4	26.9	25.6	26.3	26.1	26.8
	8H	25.3	26.0	25.8	26.4	27.0	25.8	26.5	26.3	26.9
	12H	25.4	25.9	25.9	26.4	27.0	26.0	26.5	26.5	27.0
12H	4H	24.7	25.5	25.2	25.9	26.4	25.0	25.8	25.5	26.2
	6H	25.3	25.9	25.8	26.4	26.9	25.7	26.3	26.2	26.8
	8H	25.4	26.0	25.9	26.4	27.0	25.9	26.4	26.4	26.9

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1200 B = 50	
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°
			Luminance in cd/m²				
45,0°	50,0°	55,0°	60,0°				
65,0°	70,0°	75,0°	80,0°	85,0°			
85,0°							

Photometric test report

Family
Silica® 21

Order number: 51MX20DA32WB
EAN: 4058352898543

LP number
60289_75

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

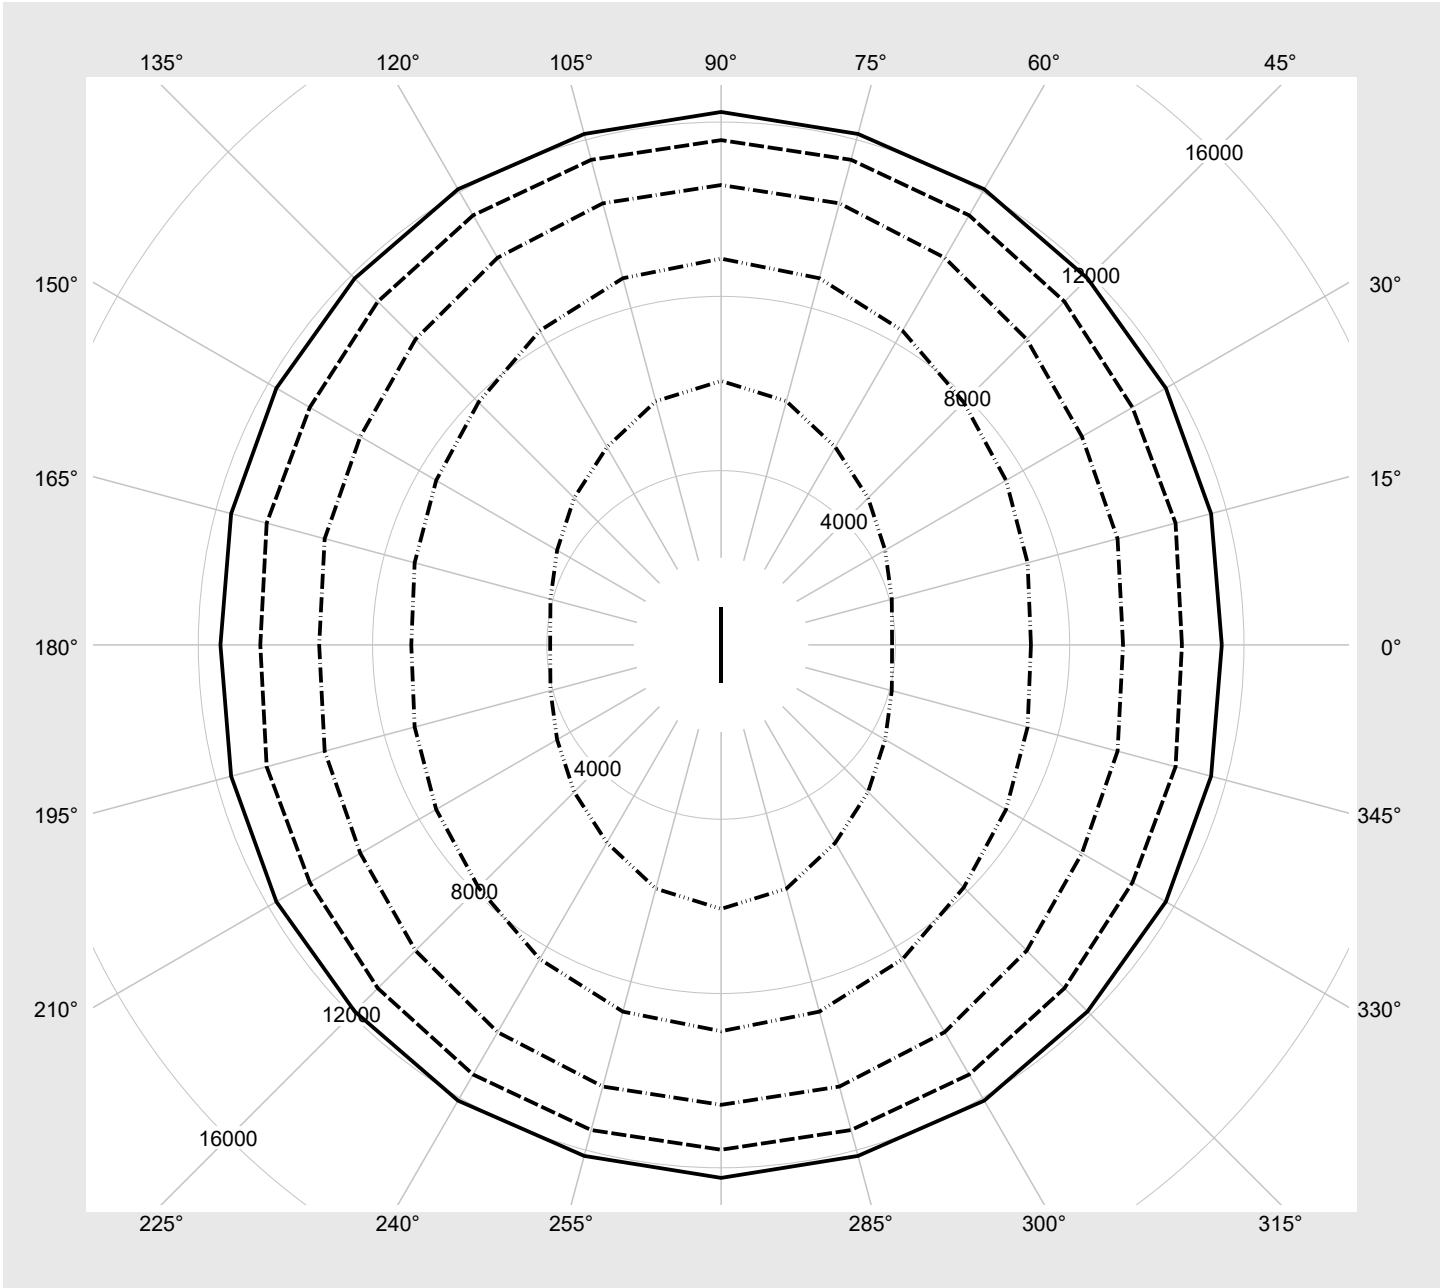

Photometric test report

Family Silica® 21	Order number: 51MX20DA32WB EAN: 4058352898543	LP number 60289_75
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2400	16.1
95	241	252	2281	15.4
90	228	250	2162	14.5
85	215	248	2042	13.7
80	202	246	1922	12.9
75	189	243	1801	12.1
70	176	241	1679	11.3
65	163	238	1558	10.5
60	151	235	1444	9.8
55	138	232	1322	9.0
50	125	228	1199	8.2
45	113	224	1084	7.5
40	100	220	961	6.8
35	87	215	836	6.0
30	75	209	721	5.3
25	63	203	604	4.5
20	50	194	479	3.8
15	38	184	363	3.1
10	25	169	236	2.3
5	13	145	119	1.3