


Photometric test report

Family Silica® 21	Order number: 51MX20DA42BB EAN: 4058352898574	LP number 60289_76
	Version	surface-mounted luminaire, with homogeneous illumination, cover, opal, direct distribution, extremely wide distribution
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 2400 lm Power consumption = 15.2 W Luminous efficacy = 157.9 lm/W
		serial documentation 23.06.2026
		

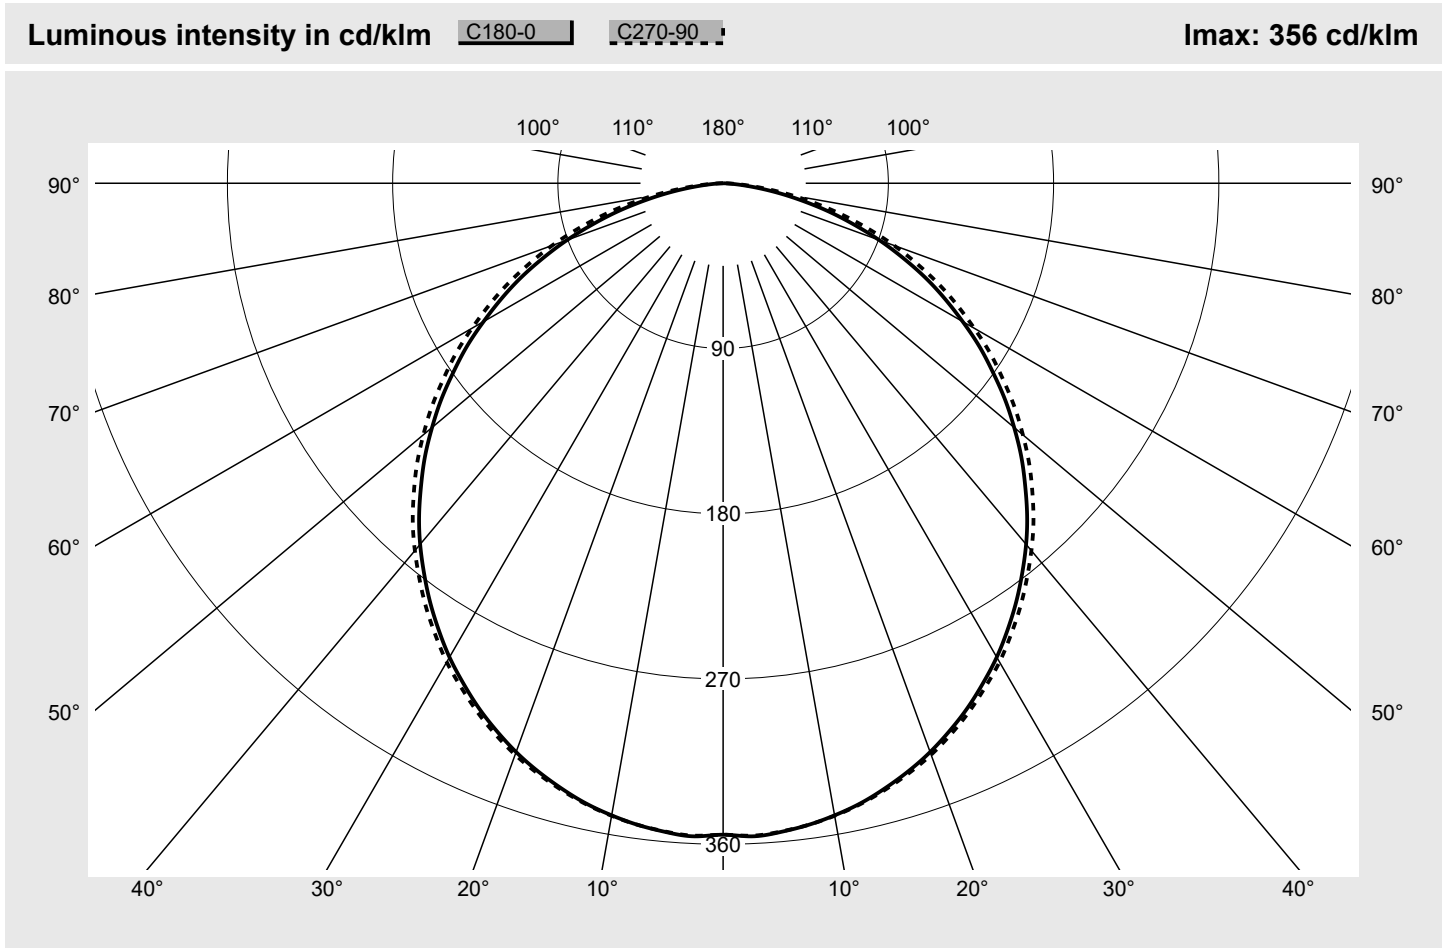

Classifications		Luminaire light output ratios	
DIN 5040	A 4 0	η_{LB}	100.0%
CIE	N1=48 N2=79 N3=96	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX20DA42BB EAN: 4058352898574	LP number 60289_76
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	354.8	354.8	354.8	354.8	354.8	354.8	354.8	0.5	0.5
2,5°	356.1	354.8	352.5	354.0	355.5	355.5	355.7	4.2	4.8
5,0°	354.8	353.6	351.3	352.8	354.4	354.3	354.5	8.4	13.2
7,5°	352.6	351.6	349.3	350.8	352.4	352.4	352.6	12.6	25.8
10,0°	349.6	348.7	346.4	347.9	349.6	349.5	349.8	16.6	42.4
12,5°	345.9	345.1	342.8	344.3	346.0	346.1	346.3	20.5	62.9
15,0°	341.1	340.5	338.2	339.7	341.5	341.5	341.8	24.2	87.0
17,5°	335.7	335.3	333.0	334.5	336.3	336.5	336.8	27.6	114.7
20,0°	329.7	329.5	327.3	328.8	330.6	330.8	331.2	30.9	145.6
22,5°	322.7	322.7	320.5	321.8	323.8	324.1	324.6	33.9	179.4
25,0°	315.2	315.4	313.2	314.5	316.5	316.9	317.4	36.5	216.0
27,5°	306.8	307.2	305.0	306.3	308.3	308.8	309.3	38.9	254.9
30,0°	298.1	298.7	296.7	297.9	300.0	300.4	301.1	41.0	295.8
32,5°	288.4	289.2	287.3	288.3	290.3	291.0	291.7	42.6	338.5
35,0°	278.3	279.3	277.6	278.6	280.5	281.2	282.0	44.0	382.4
37,5°	267.6	268.7	267.4	268.1	269.9	270.9	271.7	44.9	427.3
40,0°	256.7	257.8	256.8	257.2	259.2	260.2	261.2	45.5	472.8
42,5°	245.1	246.2	245.5	245.9	247.7	248.9	250.2	45.7	518.6
45,0°	232.6	233.7	233.4	233.7	235.5	236.5	238.2	45.5	564.1
47,5°	220.2	221.3	221.5	221.8	223.4	224.3	226.1	45.0	609.1
50,0°	206.9	207.8	208.6	208.9	210.4	211.2	213.1	44.0	653.1
52,5°	193.6	194.4	195.5	195.9	197.4	198.1	200.0	42.7	695.8
55,0°	179.3	180.3	181.6	182.1	183.6	184.1	186.0	41.0	736.7
57,5°	165.5	166.5	167.9	168.6	170.2	170.7	172.6	39.0	775.8
60,0°	150.7	151.9	153.3	154.2	155.7	156.4	157.9	36.6	812.4
62,5°	136.1	137.6	139.1	140.1	141.6	142.5	143.6	34.1	846.5
65,0°	121.4	123.0	124.5	125.7	127.6	128.3	129.2	31.2	877.7
67,5°	105.8	107.6	108.8	110.4	112.5	113.4	114.1	28.0	905.7
70,0°	90.4	92.3	93.2	95.3	97.3	98.6	99.1	24.5	930.2
72,5°	74.6	76.3	77.1	79.6	81.4	83.0	83.4	20.8	951.0
75,0°	59.7	61.0	61.9	64.2	66.4	67.9	68.3	17.0	968.0
77,5°	44.5	45.5	46.7	48.5	50.7	52.4	53.0	13.0	981.0
80,0°	30.9	31.6	32.8	34.2	36.1	37.8	38.5	9.3	990.3
82,5°	18.3	18.8	19.8	20.9	22.6	24.0	24.6	5.8	996.1
85,0°	8.6	8.8	9.5	10.4	11.4	12.6	13.2	2.9	999.0
87,5°	2.4	2.6	2.9	3.4	4.1	4.7	5.1	1.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX20DA42BB EAN: 4058352898574	LP number 60289_76
----------------------	--	-----------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.2	22.8	21.5	23.2	23.5	21.3	23.0	21.7	23.3	23.6
	3H	22.7	24.2	23.1	24.6	24.9	23.0	24.5	23.4	24.8	25.2
	4H	23.3	24.7	23.7	25.0	25.4	23.6	25.1	24.0	25.4	25.8
	6H	23.6	24.9	24.0	25.3	25.7	24.1	25.4	24.5	25.8	26.2
	8H	23.7	25.0	24.1	25.3	25.7	24.2	25.5	24.7	25.9	26.3
	12H	23.7	24.9	24.2	25.3	25.7	24.3	25.5	24.7	25.9	26.3
4H	2H	21.9	23.4	22.3	23.7	24.1	22.1	23.5	22.5	23.9	24.2
	3H	23.7	24.9	24.1	25.3	25.7	23.9	25.1	24.3	25.5	25.9
	4H	24.3	25.4	24.8	25.8	26.3	24.7	25.8	25.1	26.2	26.6
	6H	24.8	25.7	25.2	26.1	26.6	25.2	26.2	25.7	26.6	27.1
	8H	24.9	25.7	25.3	26.2	26.7	25.4	26.3	25.9	26.7	27.2
	12H	24.9	25.7	25.4	26.2	26.7	25.5	26.3	26.0	26.7	27.2
8H	4H	24.7	25.5	25.1	26.0	26.4	25.0	25.8	25.4	26.3	26.7
	6H	25.2	25.9	25.7	26.4	26.9	25.6	26.3	26.1	26.8	27.3
	8H	25.3	26.0	25.8	26.4	27.0	25.8	26.5	26.3	26.9	27.5
	12H	25.4	25.9	25.9	26.4	27.0	26.0	26.5	26.5	27.0	27.5
12H	4H	24.7	25.5	25.2	25.9	26.4	25.0	25.8	25.5	26.2	26.7
	6H	25.3	25.9	25.8	26.4	26.9	25.7	26.3	26.2	26.8	27.3
	8H	25.4	26.0	25.9	26.4	27.0	25.9	26.4	26.4	26.9	27.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1200 B = 50	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45,0°	13160.1	13222.6	13203.5	13219.7	13323.3	13379.9	13476.2
50,0°	12877.6	12934.2	12979.5	13000.5	13092.7	13144.4	13262.5
55,0°	12506.8	12573.9	12661.7	12698.0	12802.2	12841.2	12974.4
60,0°	12052.0	12151.8	12263.0	12334.7	12457.4	12509.4	12634.1
65,0°	11491.6	11642.8	11786.7	11895.0	12077.0	12141.0	12231.9
70,0°	10576.8	10798.7	10901.9	11143.6	11385.2	11526.6	11585.8
75,0°	9225.4	9420.3	9562.8	9920.3	10261.7	10492.7	10555.0
80,0°	7111.6	7282.3	7551.8	7875.0	8326.7	8713.0	8865.5
85,0°	3924.0	4055.3	4347.2	4770.8	5242.1	5790.6	6058.6

Photometric test report

Family
Silica® 21

Order number: 51MX20DA42BB
EAN: 4058352898574

LP number
60289_76

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

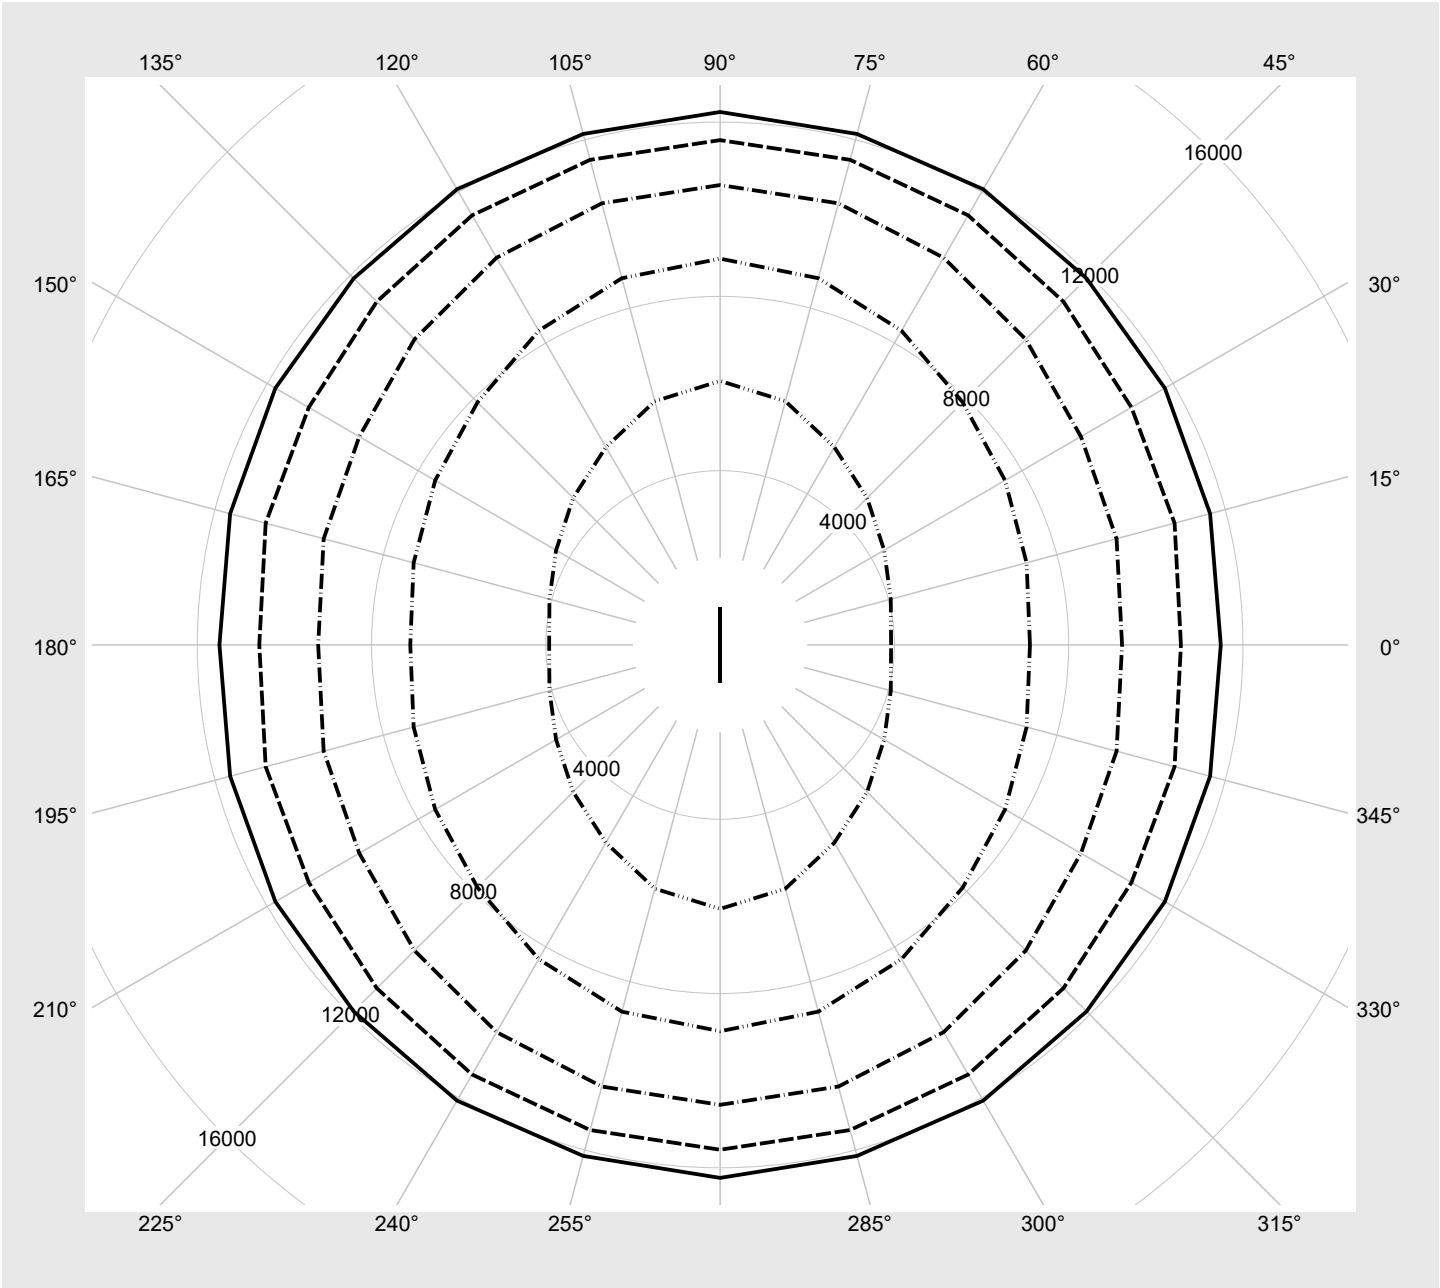

Photometric test report

Family Silica® 21	Order number: 51MX20DA42BB EAN: 4058352898574	LP number 60289_76
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2400	15.2
95	241	252	2280	14.4
90	228	250	2160	13.7
85	215	248	2040	12.9
80	202	246	1919	12.1
75	189	243	1798	11.4
70	176	241	1676	10.6
65	164	238	1564	10.0
60	151	235	1442	9.2
55	138	232	1319	8.5
50	125	228	1195	7.8
45	113	224	1082	7.1
40	100	220	958	6.4
35	88	215	843	5.8
30	75	209	718	5.0
25	63	203	602	4.4
20	50	194	477	3.6
15	38	184	360	3.0
10	26	171	244	2.2
5	14	148	128	1.3