

Photometric test report


Family
Silica® 21

Order number: **51MX20DB32SB**
EAN: **4058352898642**

LP number
60289_15

serial
documentation
23.06.2026

siteco

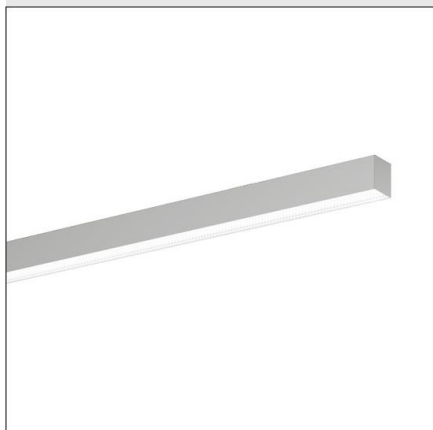

Version surface-mounted luminaire, with homogeneous illumination, cover, opal, direct distribution, extremely wide distribution

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 3000 lm
Power consumption = 20.2 W
Luminous efficacy = 148.5 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 356 cd/klm

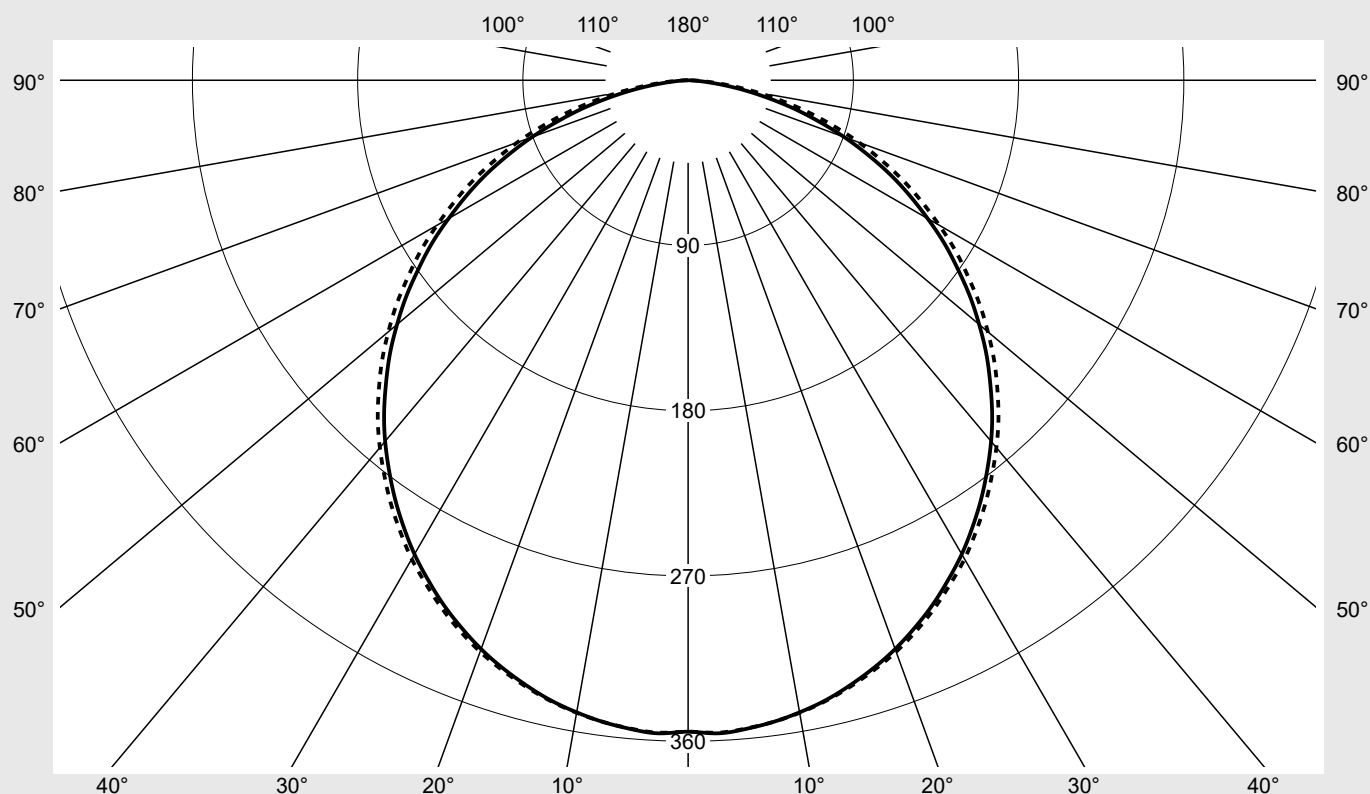

Classifications

DIN 5040 A 4 0
CIE N1=48 N2=79 N3=96
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX20DB32SB EAN: 4058352898642	LP number 60289_15
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	354.8	354.8	354.8	354.8	354.8	354.8	354.8	0.5	0.5
2,5°	356.1	354.8	352.5	354.0	355.5	355.5	355.7	4.2	4.8
5,0°	354.8	353.6	351.3	352.8	354.4	354.3	354.5	8.4	13.2
7,5°	352.6	351.6	349.3	350.8	352.4	352.4	352.6	12.6	25.8
10,0°	349.6	348.7	346.4	347.9	349.6	349.5	349.8	16.6	42.4
12,5°	345.9	345.1	342.8	344.3	346.0	346.1	346.3	20.5	62.9
15,0°	341.1	340.5	338.2	339.7	341.5	341.5	341.8	24.2	87.0
17,5°	335.7	335.3	333.0	334.5	336.3	336.5	336.8	27.6	114.7
20,0°	329.7	329.5	327.3	328.8	330.6	330.8	331.2	30.9	145.6
22,5°	322.7	322.7	320.5	321.8	323.8	324.1	324.6	33.9	179.4
25,0°	315.2	315.4	313.2	314.5	316.5	316.9	317.4	36.5	216.0
27,5°	306.8	307.2	305.0	306.3	308.3	308.8	309.3	38.9	254.9
30,0°	298.1	298.7	296.7	297.9	300.0	300.4	301.1	41.0	295.8
32,5°	288.4	289.2	287.3	288.3	290.3	291.0	291.7	42.6	338.5
35,0°	278.3	279.3	277.6	278.6	280.5	281.2	282.0	44.0	382.4
37,5°	267.6	268.7	267.4	268.1	269.9	270.9	271.7	44.9	427.3
40,0°	256.7	257.8	256.8	257.2	259.2	260.2	261.2	45.5	472.8
42,5°	245.1	246.2	245.5	245.9	247.7	248.9	250.2	45.7	518.6
45,0°	232.6	233.7	233.4	233.7	235.5	236.5	238.2	45.5	564.1
47,5°	220.2	221.3	221.5	221.8	223.4	224.3	226.1	45.0	609.1
50,0°	206.9	207.8	208.6	208.9	210.4	211.2	213.1	44.0	653.1
52,5°	193.6	194.4	195.5	195.9	197.4	198.1	200.0	42.7	695.8
55,0°	179.3	180.3	181.6	182.1	183.6	184.1	186.0	41.0	736.7
57,5°	165.5	166.5	167.9	168.6	170.2	170.7	172.6	39.0	775.8
60,0°	150.7	151.9	153.3	154.2	155.7	156.4	157.9	36.6	812.4
62,5°	136.1	137.6	139.1	140.1	141.6	142.5	143.6	34.1	846.5
65,0°	121.4	123.0	124.5	125.7	127.6	128.3	129.2	31.2	877.7
67,5°	105.8	107.6	108.8	110.4	112.5	113.4	114.1	28.0	905.7
70,0°	90.4	92.3	93.2	95.3	97.3	98.6	99.1	24.5	930.2
72,5°	74.6	76.3	77.1	79.6	81.4	83.0	83.4	20.8	951.0
75,0°	59.7	61.0	61.9	64.2	66.4	67.9	68.3	17.0	968.0
77,5°	44.5	45.5	46.7	48.5	50.7	52.4	53.0	13.0	981.0
80,0°	30.9	31.6	32.8	34.2	36.1	37.8	38.5	9.3	990.3
82,5°	18.3	18.8	19.8	20.9	22.6	24.0	24.6	5.8	996.1
85,0°	8.6	8.8	9.5	10.4	11.4	12.6	13.2	2.9	999.0
87,5°	2.4	2.6	2.9	3.4	4.1	4.7	5.1	1.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX20DB32SB EAN: 4058352898642	LP number 60289_15
----------------------	--	-----------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.2	22.8	21.5	23.2	23.5	21.3	23.0	21.7	23.3	23.6
	3H	22.7	24.2	23.1	24.6	24.9	23.0	24.5	23.4	24.8	25.2
	4H	23.3	24.7	23.7	25.0	25.4	23.6	25.1	24.0	25.4	25.8
	6H	23.6	24.9	24.0	25.3	25.7	24.1	25.4	24.5	25.8	26.2
	8H	23.7	25.0	24.1	25.3	25.7	24.2	25.5	24.7	25.9	26.3
	12H	23.7	24.9	24.2	25.3	25.7	24.3	25.5	24.7	25.9	26.3
4H	2H	21.9	23.4	22.3	23.7	24.1	22.1	23.5	22.5	23.9	24.2
	3H	23.7	24.9	24.1	25.3	25.7	23.9	25.1	24.3	25.5	25.9
	4H	24.3	25.4	24.8	25.8	26.3	24.7	25.8	25.1	26.2	26.6
	6H	24.8	25.7	25.2	26.1	26.6	25.2	26.2	25.7	26.6	27.1
	8H	24.9	25.7	25.3	26.2	26.7	25.4	26.3	25.9	26.7	27.2
	12H	24.9	25.7	25.4	26.2	26.7	25.5	26.3	26.0	26.7	27.2
8H	4H	24.7	25.5	25.1	26.0	26.4	25.0	25.8	25.4	26.3	26.7
	6H	25.2	25.9	25.7	26.4	26.9	25.6	26.3	26.1	26.8	27.3
	8H	25.3	26.0	25.8	26.4	27.0	25.8	26.5	26.3	26.9	27.5
	12H	25.4	25.9	25.9	26.4	27.0	26.0	26.5	26.5	27.0	27.5
12H	4H	24.7	25.5	25.2	25.9	26.4	25.0	25.8	25.5	26.2	26.7
	6H	25.3	25.9	25.8	26.4	26.9	25.7	26.3	26.2	26.8	27.3
	8H	25.4	26.0	25.9	26.4	27.0	25.9	26.4	26.4	26.9	27.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 50	
C-planes	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	180°						
γ	Luminance in cd/m²						
45,0°	13160.1	13222.6	13203.5	13219.7	13323.3	13379.9	13476.2
50,0°	12877.6	12934.2	12979.5	13000.5	13092.7	13144.4	13262.5
55,0°	12506.8	12573.9	12661.7	12698.0	12802.2	12841.2	12974.4
60,0°	12052.0	12151.8	12263.0	12334.7	12457.4	12509.4	12634.1
65,0°	11491.6	11642.8	11786.7	11895.0	12077.0	12141.0	12231.9
70,0°	10576.8	10798.7	10901.9	11143.6	11385.2	11526.6	11585.8
75,0°	9225.4	9420.3	9562.8	9920.3	10261.7	10492.7	10555.0
80,0°	7111.6	7282.3	7551.8	7875.0	8326.7	8713.0	8865.5
85,0°	3924.0	4055.3	4347.2	4770.8	5242.1	5790.6	6058.6

Photometric test report

Family
Silica® 21

Order number: 51MX20DB32SB
EAN: 4058352898642

LP number
60289_15

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

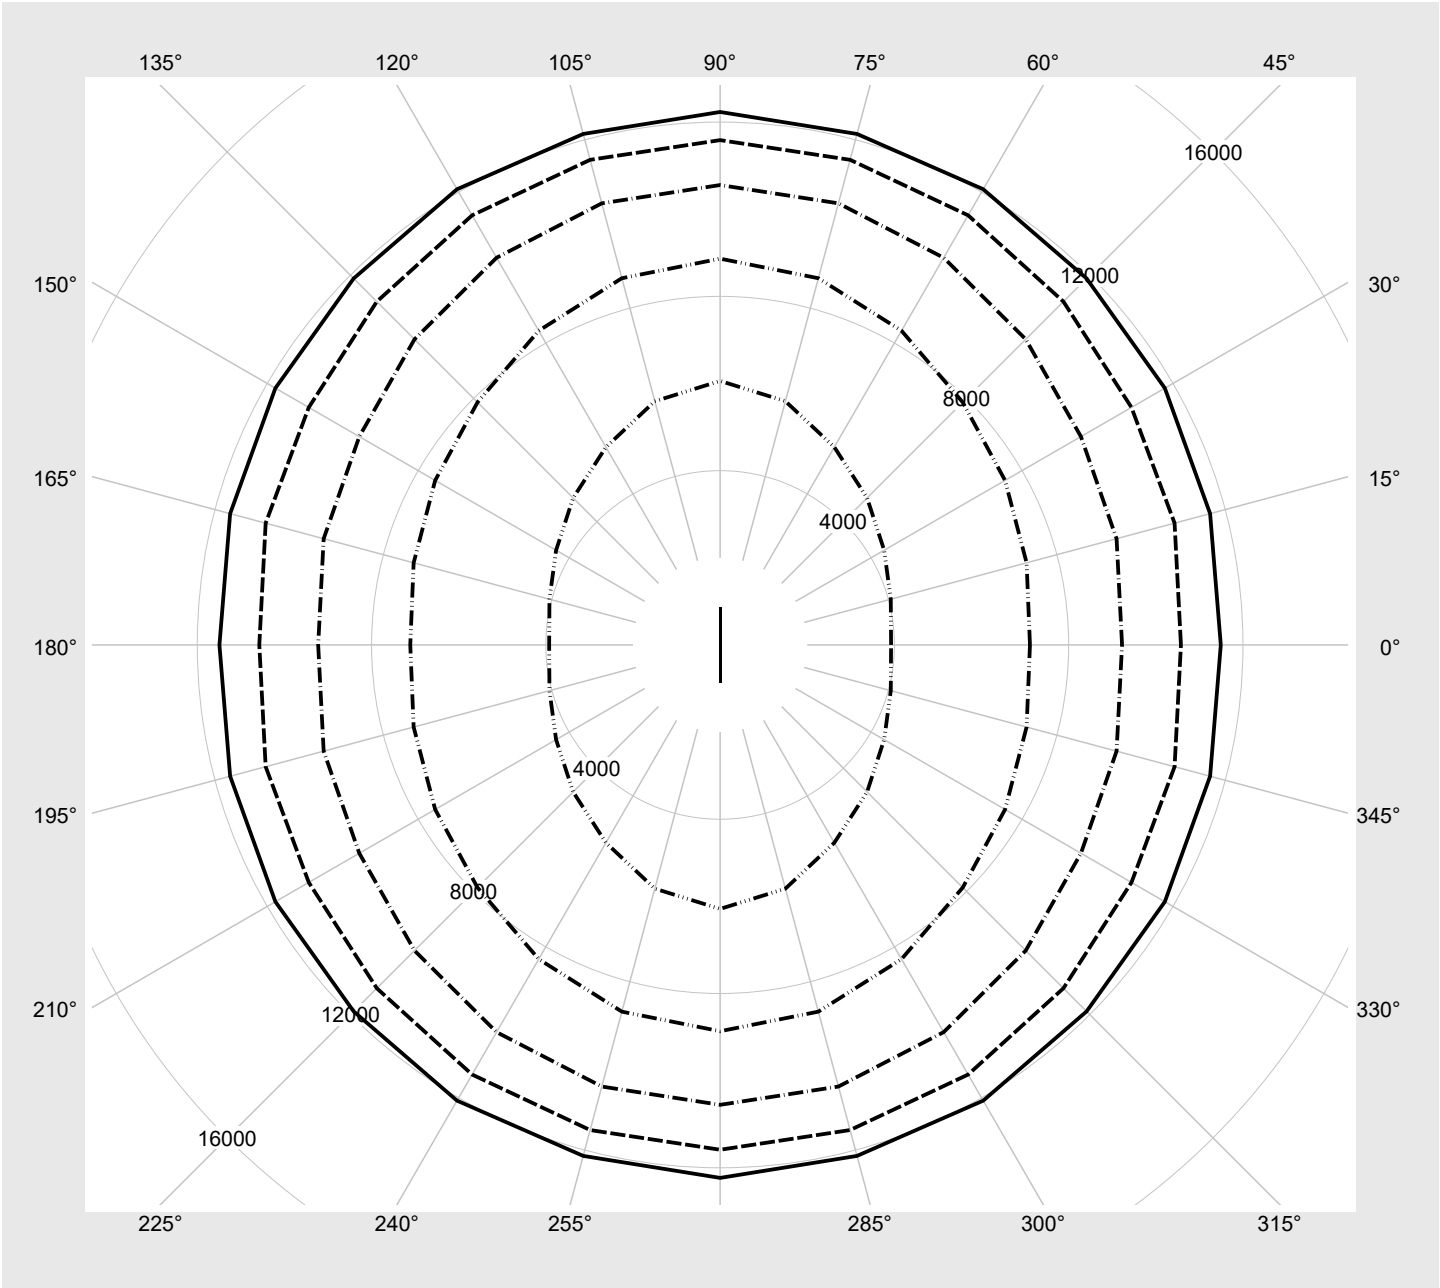

Photometric test report

Family Silica® 21	Order number: 51MX20DB32SB EAN: 4058352898642	LP number 60289_15
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	3000	20.2
95	241	252	2851	19.2
90	228	250	2701	18.2
85	215	248	2551	17.1
80	202	246	2401	16.1
75	189	243	2250	15.1
70	176	241	2098	14.1
65	163	238	1946	13.1
60	151	235	1805	12.2
55	138	232	1651	11.2
50	125	228	1497	10.2
45	113	224	1355	9.4
40	100	220	1200	8.5
35	87	215	1044	7.5
30	75	209	901	6.6
25	63	203	755	5.7
20	50	194	598	4.8
15	38	184	453	3.9
10	25	169	295	2.9
5	13	145	148	1.6