


Photometric test report

Family Silica® 21	Order number: 51MX20DB42BB EAN: 4058352898697	LP number 60289_12
	Version	surface-mounted luminaire, with homogeneous illumination, cover, opal, direct distribution, extremely wide distribution
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 3000 lm Power consumption = 19.0 W Luminous efficacy = 157.9 lm/W
		serial documentation 23.06.2026
		siteco

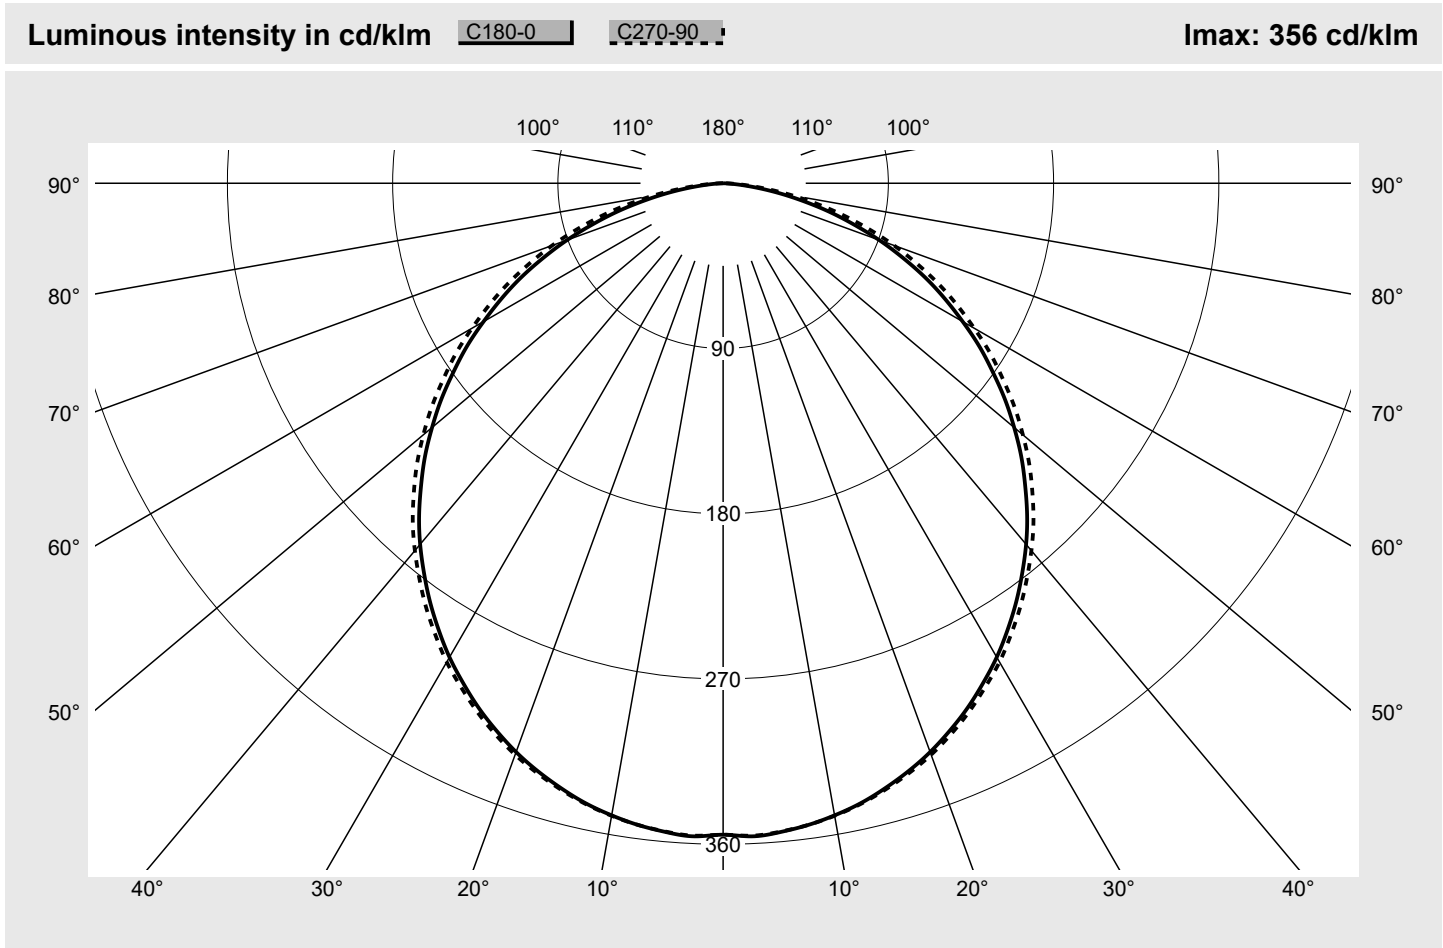

Classifications		Luminaire light output ratios	
DIN 5040	A 4 0	η_{LB}	100.0%
CIE	N1=48 N2=79 N3=96	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX20DB42BB EAN: 4058352898697	LP number 60289_12
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	354.8	354.8	354.8	354.8	354.8	354.8	354.8	0.5	0.5
2,5°	356.1	354.8	352.5	354.0	355.5	355.5	355.7	4.2	4.8
5,0°	354.8	353.6	351.3	352.8	354.4	354.3	354.5	8.4	13.2
7,5°	352.6	351.6	349.3	350.8	352.4	352.4	352.6	12.6	25.8
10,0°	349.6	348.7	346.4	347.9	349.6	349.5	349.8	16.6	42.4
12,5°	345.9	345.1	342.8	344.3	346.0	346.1	346.3	20.5	62.9
15,0°	341.1	340.5	338.2	339.7	341.5	341.5	341.8	24.2	87.0
17,5°	335.7	335.3	333.0	334.5	336.3	336.5	336.8	27.6	114.7
20,0°	329.7	329.5	327.3	328.8	330.6	330.8	331.2	30.9	145.6
22,5°	322.7	322.7	320.5	321.8	323.8	324.1	324.6	33.9	179.4
25,0°	315.2	315.4	313.2	314.5	316.5	316.9	317.4	36.5	216.0
27,5°	306.8	307.2	305.0	306.3	308.3	308.8	309.3	38.9	254.9
30,0°	298.1	298.7	296.7	297.9	300.0	300.4	301.1	41.0	295.8
32,5°	288.4	289.2	287.3	288.3	290.3	291.0	291.7	42.6	338.5
35,0°	278.3	279.3	277.6	278.6	280.5	281.2	282.0	44.0	382.4
37,5°	267.6	268.7	267.4	268.1	269.9	270.9	271.7	44.9	427.3
40,0°	256.7	257.8	256.8	257.2	259.2	260.2	261.2	45.5	472.8
42,5°	245.1	246.2	245.5	245.9	247.7	248.9	250.2	45.7	518.6
45,0°	232.6	233.7	233.4	233.7	235.5	236.5	238.2	45.5	564.1
47,5°	220.2	221.3	221.5	221.8	223.4	224.3	226.1	45.0	609.1
50,0°	206.9	207.8	208.6	208.9	210.4	211.2	213.1	44.0	653.1
52,5°	193.6	194.4	195.5	195.9	197.4	198.1	200.0	42.7	695.8
55,0°	179.3	180.3	181.6	182.1	183.6	184.1	186.0	41.0	736.7
57,5°	165.5	166.5	167.9	168.6	170.2	170.7	172.6	39.0	775.8
60,0°	150.7	151.9	153.3	154.2	155.7	156.4	157.9	36.6	812.4
62,5°	136.1	137.6	139.1	140.1	141.6	142.5	143.6	34.1	846.5
65,0°	121.4	123.0	124.5	125.7	127.6	128.3	129.2	31.2	877.7
67,5°	105.8	107.6	108.8	110.4	112.5	113.4	114.1	28.0	905.7
70,0°	90.4	92.3	93.2	95.3	97.3	98.6	99.1	24.5	930.2
72,5°	74.6	76.3	77.1	79.6	81.4	83.0	83.4	20.8	951.0
75,0°	59.7	61.0	61.9	64.2	66.4	67.9	68.3	17.0	968.0
77,5°	44.5	45.5	46.7	48.5	50.7	52.4	53.0	13.0	981.0
80,0°	30.9	31.6	32.8	34.2	36.1	37.8	38.5	9.3	990.3
82,5°	18.3	18.8	19.8	20.9	22.6	24.0	24.6	5.8	996.1
85,0°	8.6	8.8	9.5	10.4	11.4	12.6	13.2	2.9	999.0
87,5°	2.4	2.6	2.9	3.4	4.1	4.7	5.1	1.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

siteco

12H95.0°

Photometric test report

Family
Silica® 21

Order number: 51MX20DB42BB
EAN: 4058352898697

LP number
60289_12

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

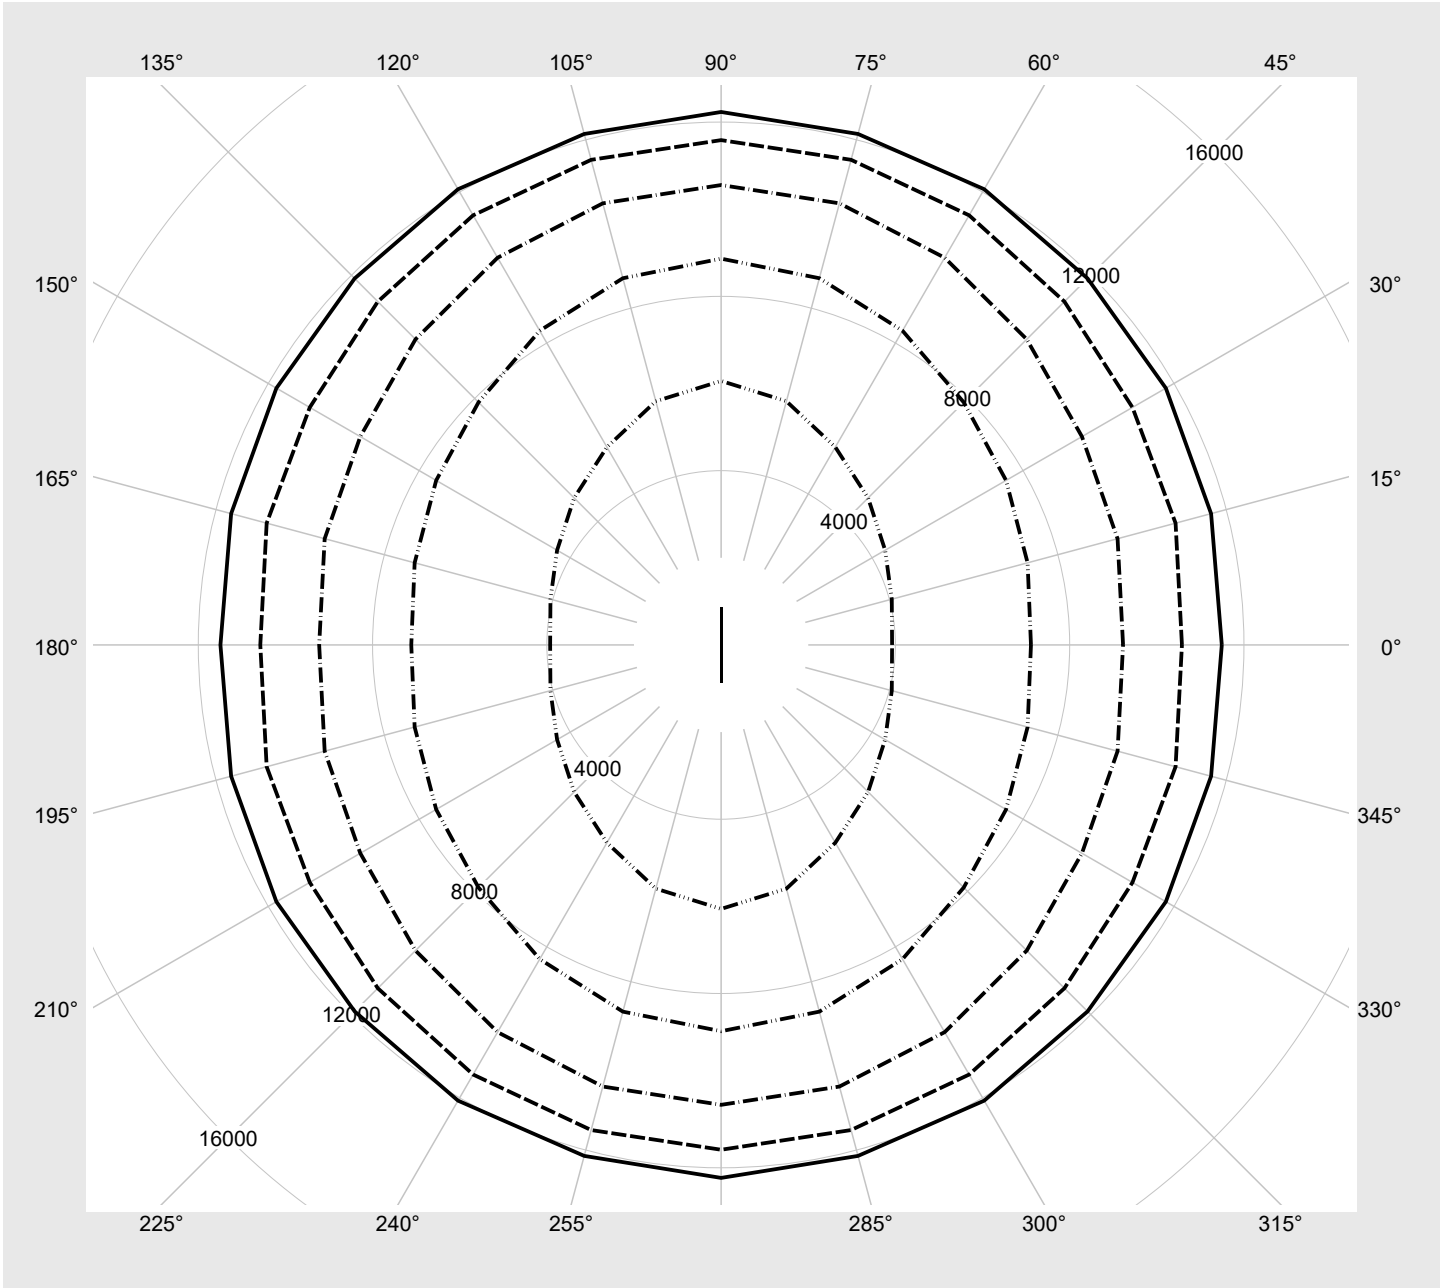

Photometric test report

Family Silica® 21	Order number: 51MX20DB42BB EAN: 4058352898697	LP number 60289_12
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	3000	19.0
95	241	252	2850	18.0
90	228	250	2699	17.1
85	215	248	2550	16.1
80	202	246	2399	15.2
75	189	243	2247	14.2
70	176	241	2095	13.3
65	164	238	1954	12.4
60	151	235	1802	11.5
55	138	232	1648	10.6
50	125	228	1494	9.7
45	113	224	1352	8.8
40	100	220	1197	8.0
35	88	215	1053	7.2
30	75	209	896	6.2
25	63	203	752	5.4
20	50	194	595	4.5
15	38	184	451	3.7
10	26	171	305	2.8
5	14	148	160	1.6