


Photometric test report

Family Silica® 21	Order number: 51MX20DC35SB EAN: 4058352898765	LP number 60289_21
	Version	surface-mounted luminaire, with homogeneous illumination, cover, opal, direct distribution, extremely wide distribution
	Lamps	LED 3000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 6000 lm Power consumption = 42.6 W Luminous efficacy = 140.8 lm/W
		serial documentation 23.06.2026
		

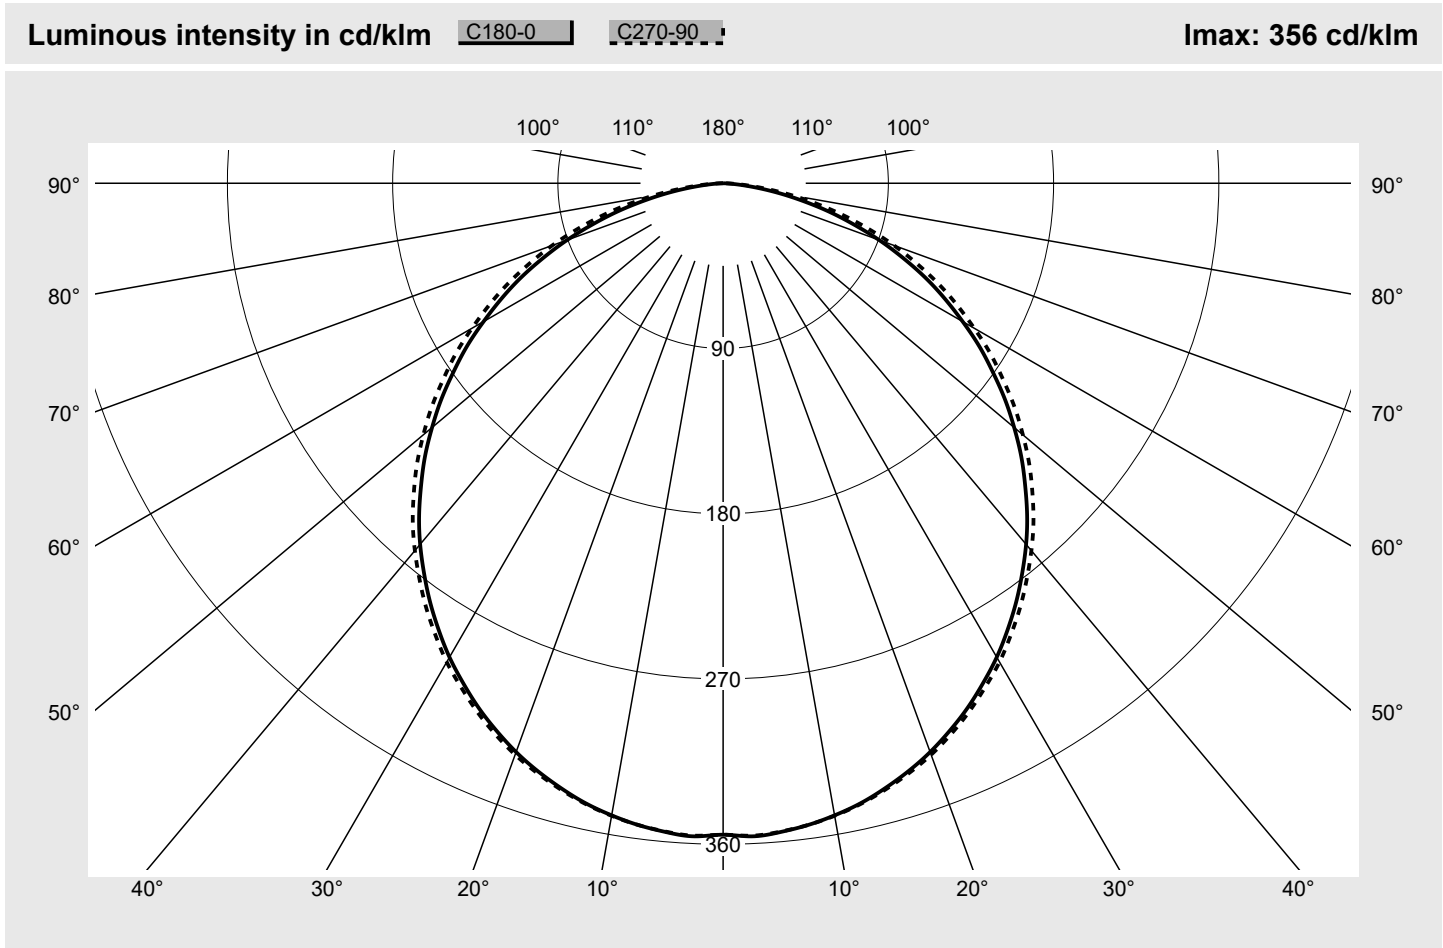

Classifications		Luminaire light output ratios	
DIN 5040	A 4 0	η_{LB}	100.0%
CIE	N1=48 N2=79 N3=96	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX20DC35SB EAN: 4058352898765	LP number 60289_21
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	354.8	354.8	354.8	354.8	354.8	354.8	354.8	0.5	0.5
2,5°	356.1	354.8	352.5	354.0	355.5	355.5	355.7	4.2	4.8
5,0°	354.8	353.6	351.3	352.8	354.4	354.3	354.5	8.4	13.2
7,5°	352.6	351.6	349.3	350.8	352.4	352.4	352.6	12.6	25.8
10,0°	349.6	348.7	346.4	347.9	349.6	349.5	349.8	16.6	42.4
12,5°	345.9	345.1	342.8	344.3	346.0	346.1	346.3	20.5	62.9
15,0°	341.1	340.5	338.2	339.7	341.5	341.5	341.8	24.2	87.0
17,5°	335.7	335.3	333.0	334.5	336.3	336.5	336.8	27.6	114.7
20,0°	329.7	329.5	327.3	328.8	330.6	330.8	331.2	30.9	145.6
22,5°	322.7	322.7	320.5	321.8	323.8	324.1	324.6	33.9	179.4
25,0°	315.2	315.4	313.2	314.5	316.5	316.9	317.4	36.5	216.0
27,5°	306.8	307.2	305.0	306.3	308.3	308.8	309.3	38.9	254.9
30,0°	298.1	298.7	296.7	297.9	300.0	300.4	301.1	41.0	295.8
32,5°	288.4	289.2	287.3	288.3	290.3	291.0	291.7	42.6	338.5
35,0°	278.3	279.3	277.6	278.6	280.5	281.2	282.0	44.0	382.4
37,5°	267.6	268.7	267.4	268.1	269.9	270.9	271.7	44.9	427.3
40,0°	256.7	257.8	256.8	257.2	259.2	260.2	261.2	45.5	472.8
42,5°	245.1	246.2	245.5	245.9	247.7	248.9	250.2	45.7	518.6
45,0°	232.6	233.7	233.4	233.7	235.5	236.5	238.2	45.5	564.1
47,5°	220.2	221.3	221.5	221.8	223.4	224.3	226.1	45.0	609.1
50,0°	206.9	207.8	208.6	208.9	210.4	211.2	213.1	44.0	653.1
52,5°	193.6	194.4	195.5	195.9	197.4	198.1	200.0	42.7	695.8
55,0°	179.3	180.3	181.6	182.1	183.6	184.1	186.0	41.0	736.7
57,5°	165.5	166.5	167.9	168.6	170.2	170.7	172.6	39.0	775.8
60,0°	150.7	151.9	153.3	154.2	155.7	156.4	157.9	36.6	812.4
62,5°	136.1	137.6	139.1	140.1	141.6	142.5	143.6	34.1	846.5
65,0°	121.4	123.0	124.5	125.7	127.6	128.3	129.2	31.2	877.7
67,5°	105.8	107.6	108.8	110.4	112.5	113.4	114.1	28.0	905.7
70,0°	90.4	92.3	93.2	95.3	97.3	98.6	99.1	24.5	930.2
72,5°	74.6	76.3	77.1	79.6	81.4	83.0	83.4	20.8	951.0
75,0°	59.7	61.0	61.9	64.2	66.4	67.9	68.3	17.0	968.0
77,5°	44.5	45.5	46.7	48.5	50.7	52.4	53.0	13.0	981.0
80,0°	30.9	31.6	32.8	34.2	36.1	37.8	38.5	9.3	990.3
82,5°	18.3	18.8	19.8	20.9	22.6	24.0	24.6	5.8	996.1
85,0°	8.6	8.8	9.5	10.4	11.4	12.6	13.2	2.9	999.0
87,5°	2.4	2.6	2.9	3.4	4.1	4.7	5.1	1.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX20DC35SB EAN: 4058352898765	LP number 60289_21
----------------------	--	-----------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.2	22.8	21.5	23.2	23.5	21.3	23.0	21.7	23.3	23.6
	3H	22.7	24.2	23.1	24.6	24.9	23.0	24.5	23.4	24.8	25.2
	4H	23.3	24.7	23.7	25.0	25.4	23.6	25.1	24.0	25.4	25.8
	6H	23.6	24.9	24.0	25.3	25.7	24.1	25.4	24.5	25.8	26.2
	8H	23.7	25.0	24.1	25.3	25.7	24.2	25.5	24.7	25.9	26.3
	12H	23.7	24.9	24.2	25.3	25.7	24.3	25.5	24.7	25.9	26.3
4H	2H	21.9	23.4	22.3	23.7	24.1	22.1	23.5	22.5	23.9	24.2
	3H	23.7	24.9	24.1	25.3	25.7	23.9	25.1	24.3	25.5	25.9
	4H	24.3	25.4	24.8	25.8	26.3	24.7	25.8	25.1	26.2	26.6
	6H	24.8	25.7	25.2	26.1	26.6	25.2	26.2	25.7	26.6	27.1
	8H	24.9	25.7	25.3	26.2	26.7	25.4	26.3	25.9	26.7	27.2
	12H	24.9	25.7	25.4	26.2	26.7	25.5	26.3	26.0	26.7	27.2
8H	4H	24.7	25.5	25.1	26.0	26.4	25.0	25.8	25.4	26.3	26.7
	6H	25.2	25.9	25.7	26.4	26.9	25.6	26.3	26.1	26.8	27.3
	8H	25.3	26.0	25.8	26.4	27.0	25.8	26.5	26.3	26.9	27.5
	12H	25.4	25.9	25.9	26.4	27.0	26.0	26.5	26.5	27.0	27.5
12H	4H	24.7	25.5	25.2	25.9	26.4	25.0	25.8	25.5	26.2	26.7
	6H	25.3	25.9	25.8	26.4	26.9	25.7	26.3	26.2	26.8	27.3
	8H	25.4	26.0	25.9	26.4	27.0	25.9	26.4	26.4	26.9	27.5

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 3000 B = 50	
C-planes	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	180°						
γ	Luminance in cd/m²						
45,0°	13160.1	13222.6	13203.5	13219.7	13323.3	13379.9	13476.2
50,0°	12877.6	12934.2	12979.5	13000.5	13092.7	13144.4	13262.5
55,0°	12506.8	12573.9	12661.7	12698.0	12802.2	12841.2	12974.4
60,0°	12052.0	12151.8	12263.0	12334.7	12457.4	12509.4	12634.1
65,0°	11491.6	11642.8	11786.7	11895.0	12077.0	12141.0	12231.9
70,0°	10576.8	10798.7	10901.9	11143.6	11385.2	11526.6	11585.8
75,0°	9225.4	9420.3	9562.8	9920.3	10261.7	10492.7	10555.0
80,0°	7111.6	7282.3	7551.8	7875.0	8326.7	8713.0	8865.5
85,0°	3924.0	4055.3	4347.2	4770.8	5242.1	5790.6	6058.6

Photometric test report

Family
Silica® 21

Order number: 51MX20DC35SB
EAN: 4058352898765

LP number
60289_21

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

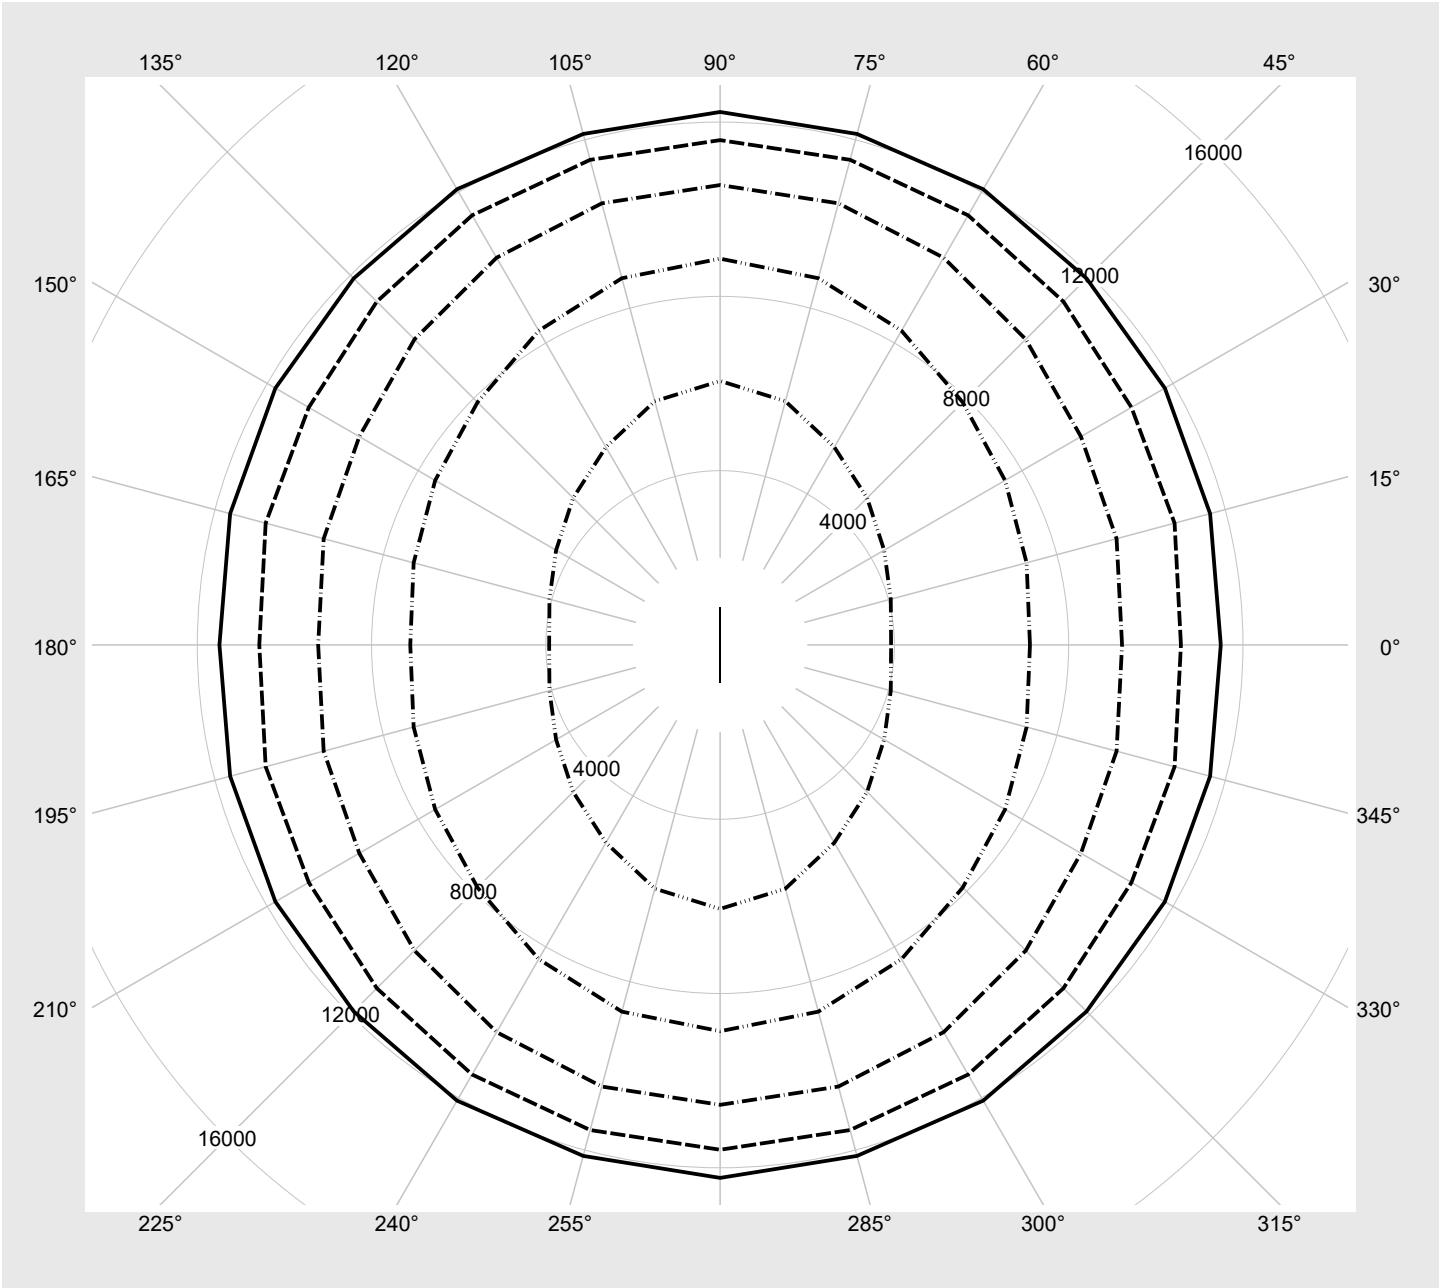

Photometric test report

Family Silica® 21	Order number: 51MX20DC35SB EAN: 4058352898765	LP number 60289_21
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6000	42.6
95	241	252	5703	40.6
90	228	250	5404	38.6
85	215	248	5103	36.5
80	202	246	4802	34.5
75	189	243	4500	32.3
70	176	241	4197	30.2
65	163	238	3892	28.2
60	151	235	3610	26.3
55	138	232	3303	24.3
50	125	228	2995	22.3
45	113	224	2710	20.4
40	100	220	2401	18.5
35	87	215	2090	16.5
30	75	209	1801	14.6
25	63	203	1510	12.7
20	50	194	1196	10.8
15	38	184	906	9.0
10	25	169	590	6.9
5	13	145	298	5.0
3	8	127	176	4.2