

Photometric test report

Family
CITY-LIGHT 400 LED

Order number: 5XA5303FB14HP
EAN: 4058352438008

LP number
58723_16



Version post-top- or mounting to wall arm
Optic asymmetric, extremely wide distribution (P1.0a)
Cover cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 80
Controlgear ECG Plus
Rated values Net luminous flux = 2960 lm
Power consumption = 25.6 W
Luminous efficacy = 115.6 lm/W

serial documentation
22.10.2020

siteco

Luminous intensity in cd/klm


C180-0

C190-10

C195-15

C270-90

Imax: 778 cd/klm

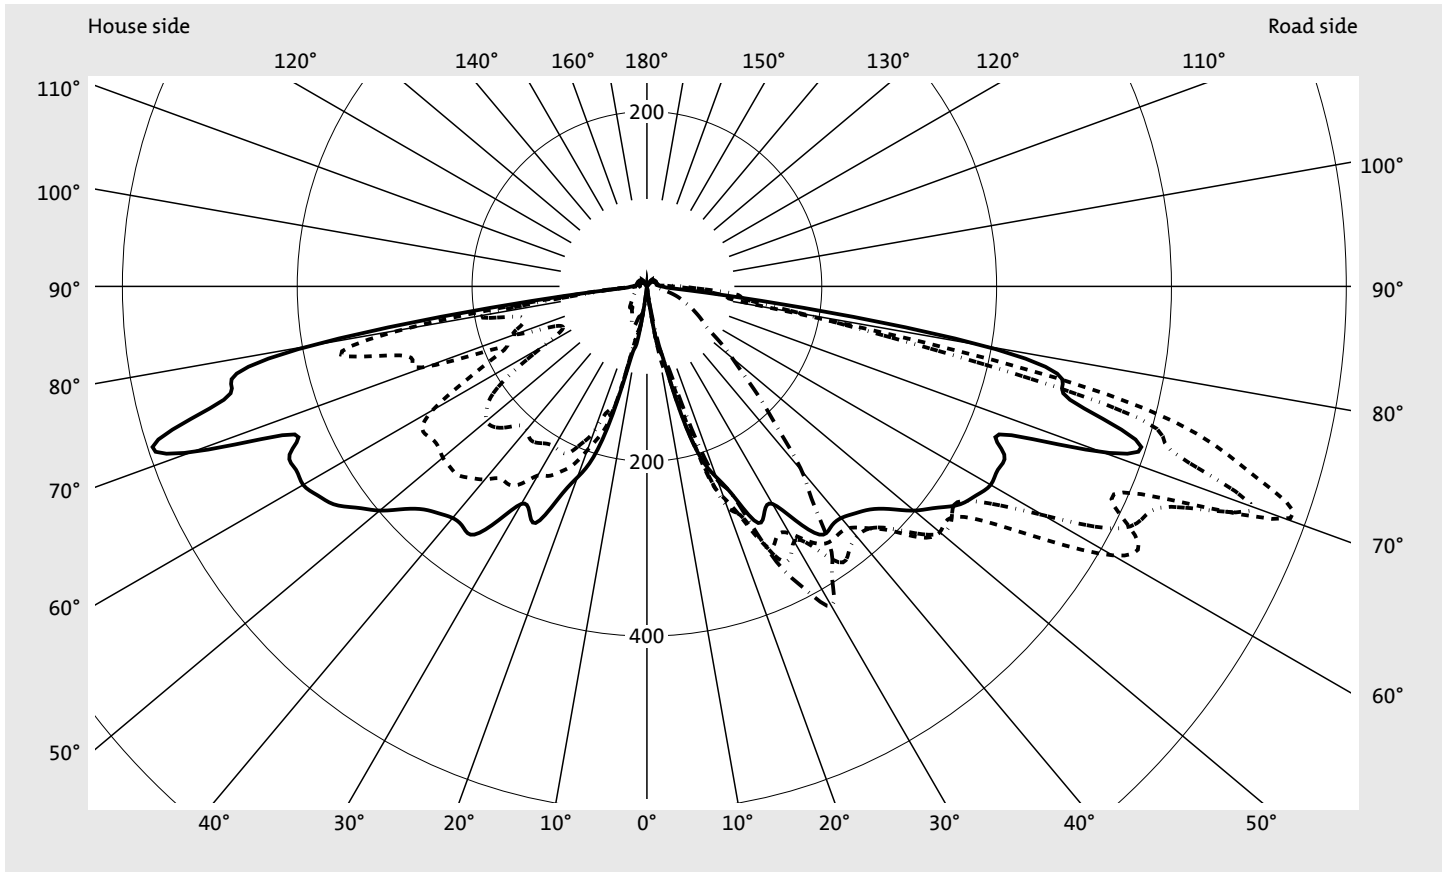

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	94.5%
Eta 90° - 180°	5.5%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	778.1
Imax 80°	390.6
Imax 90°	41.1
Imax >90°	22.0
Imax >95°	12.4


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family CITY-LIGHT 400 LED	Order number: 5XA5303FB14HP EAN: 4058352438008	LP number 58723_16
-------------------------------------	---	------------------------------

Envelope curve in cd/klm KMK 70° KMK 67,5° KMK 65° KMK 62,5° siteco

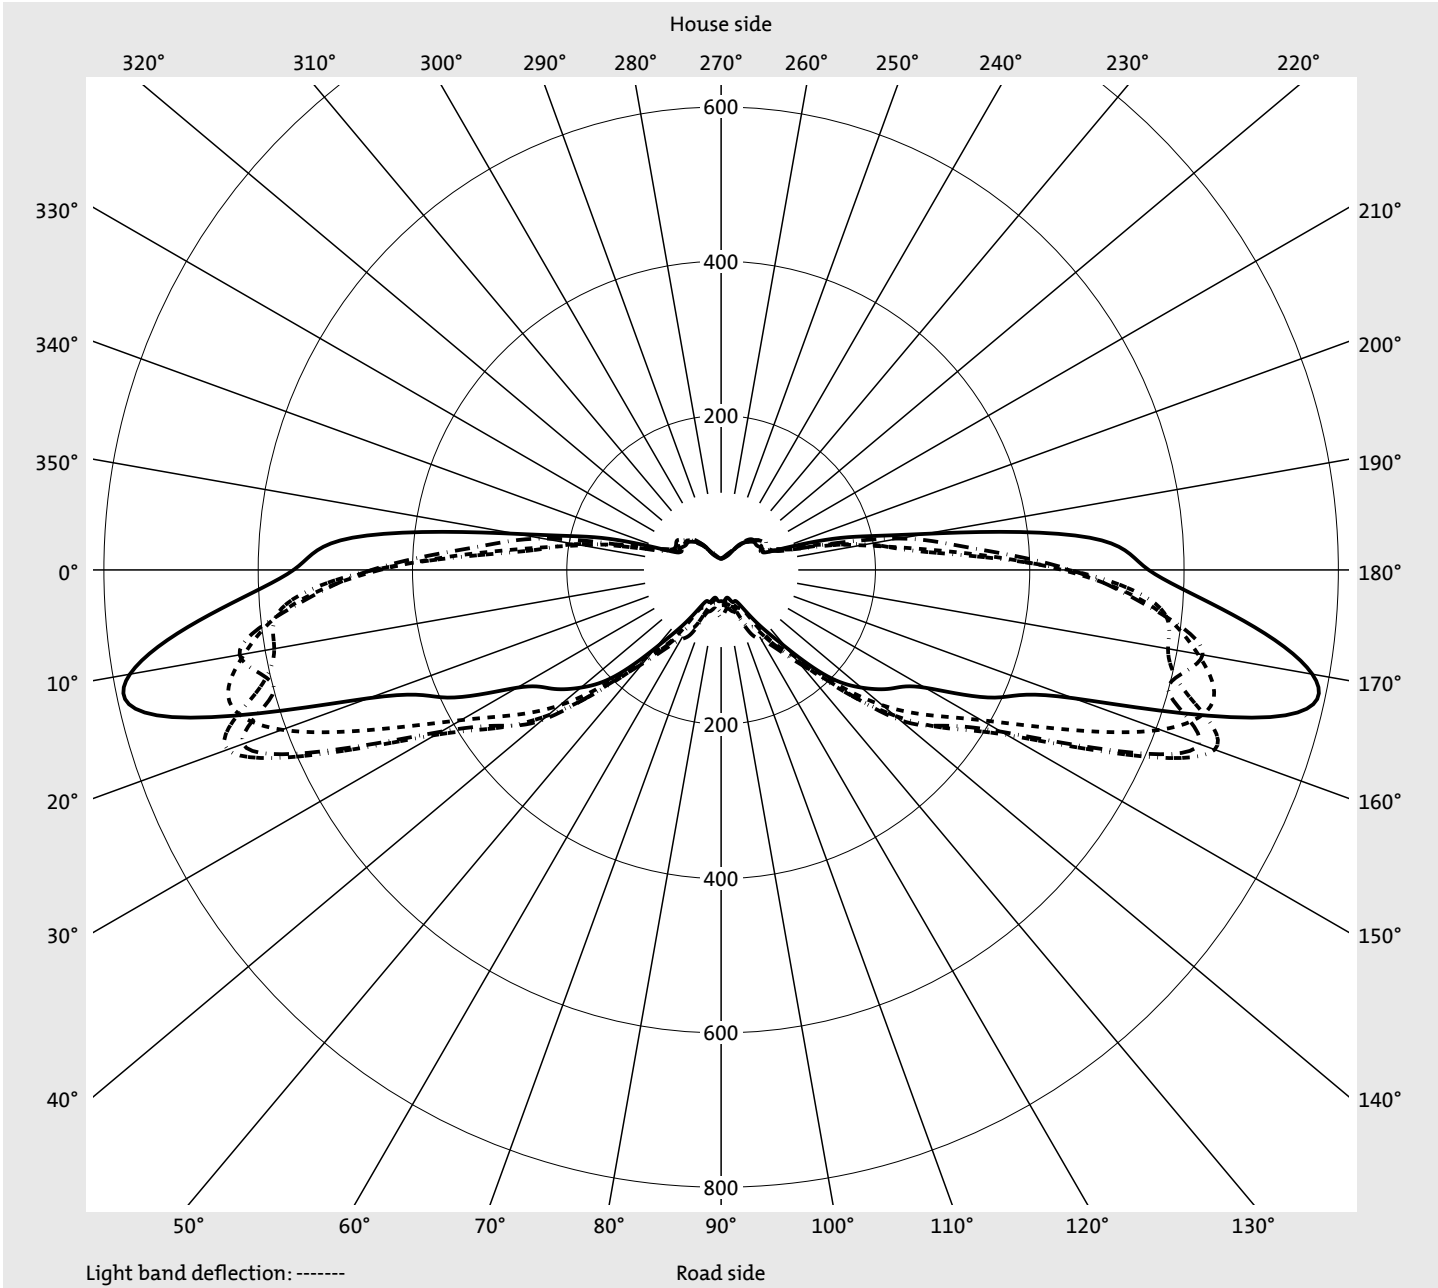

Photometric test report

Family CITY-LIGHT 400 LED	Order number: 5XA5303FB14HP EAN: 4058352438008	LP number 58723_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
2,5°	1.1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.2	1.1	1.2
5,0°	2.5	2.5	2.7	2.3	2.5	2.3	2.5	2.1	2.5	2.1	2.5	2.1	2.5
7,5°	14.5	11.3	13.5	9.6	12.4	9.4	11.0	7.3	8.9	6.7	7.6	6.0	8.5
10,0°	64.7	69.3	72.3	68.4	67.0	54.0	49.1	35.3	29.9	22.7	17.4	18.1	23.4
12,5°	81.3	86.6	101.2	82.4	93.4	100.4	104.7	81.3	84.9	54.9	56.5	60.4	67.5
15,0°	151.3	127.6	118.3	148.1	153.9	142.1	149.2	112.3	126.0	140.1	165.6	147.7	159.6
17,5°	206.2	209.4	217.5	213.3	218.3	184.4	188.5	200.9	206.6	179.8	175.6	169.5	196.8
20,0°	232.4	241.1	257.4	268.2	244.7	246.2	255.8	251.4	272.5	244.1	243.6	257.9	252.8
22,5°	260.2	274.2	290.5	285.6	293.2	296.0	299.2	278.7	299.0	296.0	295.1	277.6	271.4
25,0°	298.0	322.8	329.9	334.6	335.2	318.0	322.2	305.8	315.5	301.5	304.9	298.2	307.2
27,5°	291.1	332.9	322.1	352.5	345.3	342.4	346.3	338.0	337.8	312.7	315.0	306.7	304.0
30,0°	287.3	326.0	326.1	336.8	348.1	352.7	361.9	347.6	329.5	303.8	305.4	308.8	295.1
32,5°	318.3	335.4	346.2	352.7	348.3	348.1	359.4	345.6	352.4	319.2	301.5	298.3	278.3
35,0°	346.9	366.5	358.6	385.7	378.0	357.5	365.5	348.8	350.8	324.2	303.6	289.1	263.1
37,5°	346.2	370.4	358.4	380.2	391.2	382.5	376.6	364.2	345.8	323.8	286.5	264.7	244.7
40,0°	345.8	366.9	360.7	373.4	383.4	385.7	383.4	363.3	338.2	310.7	264.5	237.7	227.5
42,5°	352.2	371.3	375.2	375.9	379.1	375.2	378.6	354.8	320.8	287.7	247.0	213.6	209.2
45,0°	360.9	387.8	395.2	391.2	391.0	372.7	366.0	344.2	307.2	268.2	225.0	195.2	188.5
47,5°	377.0	412.9	425.2	418.3	414.4	379.3	360.5	334.3	298.7	243.1	195.8	187.8	179.5
50,0°	399.0	427.8	437.4	439.5	439.0	401.6	371.0	329.7	282.6	215.1	171.3	176.8	167.1
52,5°	416.1	440.8	436.0	439.2	450.0	417.4	378.8	329.3	272.6	201.2	153.9	159.4	151.8
55,0°	435.4	468.8	466.3	431.7	439.0	421.5	382.5	328.4	272.8	198.6	151.1	147.2	135.2
57,5°	445.7	507.9	538.2	461.0	464.3	437.8	377.3	334.8	280.4	198.2	152.2	131.8	118.5
60,0°	454.0	550.8	615.3	523.3	543.0	481.0	384.6	341.2	291.6	206.0	161.6	125.1	109.7
62,5°	453.0	558.4	633.7	599.8	659.4	551.0	419.3	352.0	302.8	214.7	158.7	123.8	104.0
65,0°	450.2	571.7	588.2	626.4	680.8	561.2	427.8	357.7	293.7	219.3	153.6	116.0	86.1
67,5°	442.2	563.4	627.5	659.7	605.7	488.2	389.4	327.9	272.8	205.7	143.3	111.6	64.3
70,0°	554.1	665.4	778.1	736.8	486.1	391.5	305.2	268.2	237.2	195.0	131.3	89.3	58.5
72,5°	588.0	735.5	733.8	631.2	439.3	306.7	210.8	181.8	185.5	174.9	116.6	74.2	47.8
75,0°	501.0	537.8	651.2	583.2	295.1	204.3	138.5	127.4	121.7	124.9	85.4	64.7	40.4
77,5°	486.1	396.5	468.6	344.2	201.2	142.8	111.3	109.8	81.3	68.0	42.7	38.8	30.6
80,0°	390.6	266.3	154.3	181.1	129.3	95.5	80.6	76.4	47.7	40.4	30.5	24.6	21.4
82,5°	155.2	126.5	92.7	114.1	93.7	67.3	61.8	51.9	25.5	20.7	17.7	16.5	16.1
85,0°	38.8	48.0	69.3	101.9	72.3	48.7	41.6	31.2	20.2	15.8	14.2	13.3	13.1
87,5°	20.7	32.4	47.7	59.9	41.6	28.3	20.9	19.0	14.7	13.5	12.6	12.2	11.7
90,0°	16.8	20.4	29.8	41.1	22.0	15.8	15.2	12.9	11.7	11.5	11.3	11.3	11.0
92,5°	14.7	15.8	22.0	20.6	14.5	13.1	12.0	11.7	11.3	11.3	11.3	11.0	11.0
95,0°	13.1	13.8	17.4	12.9	12.0	12.0	11.7	11.5	11.3	11.3	11.2	11.0	10.8
97,5°	12.4	12.2	12.0	12.0	11.7	11.7	11.5	11.3	11.2	11.2	11.2	11.0	11.0
100,0°	12.0	12.0	11.9	11.9	11.7	11.5	11.3	11.3	11.2	11.2	11.2	11.0	10.8
102,5°	11.9	11.9	11.7	11.7	11.7	11.5	11.5	11.2	11.2	11.2	11.2	11.0	10.8
105,0°	11.9	11.9	11.9	11.7	11.5	11.3	11.3	11.2	11.2	11.2	11.2	11.2	11.2
107,5°	11.7	11.7	11.7	11.5	11.5	11.5	11.2	11.2	11.2	11.2	11.2	11.2	11.2
110,0°	11.7	11.7	11.7	11.5	11.5	11.5	11.3	11.2	11.3	11.2	11.2	11.3	11.3
112,5°	11.5	11.7	11.5	11.5	11.5	11.5	11.2	11.2	11.3	11.3	11.5	11.3	11.5

Photometric test report

Family CITY-LIGHT 400 LED	Order number: 5XA5303FB14HP EAN: 4058352438008	LP number 58723_16
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
2,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.2	1.2
5,0°	2.1	2.5	2.3	2.8	2.5	2.8	3.2	3.0	3.9	3.4	4.6	3.5	4.8
7,5°	8.0	10.3	8.5	10.1	8.3	9.9	18.4	14.5	17.9	12.4	12.4	11.0	15.9
10,0°	25.3	37.6	37.9	42.7	37.7	40.0	65.7	50.0	54.2	40.7	36.0	27.1	29.6
12,5°	63.1	69.6	78.1	88.8	82.6	83.3	82.4	67.3	62.7	64.8	65.2	82.2	74.8
15,0°	125.6	119.4	105.2	105.4	92.7	98.5	140.8	143.7	143.1	119.4	126.3	113.7	95.8
17,5°	172.9	174.7	172.4	182.6	174.9	174.0	199.8	179.3	150.2	141.2	147.2	118.5	114.8
20,0°	208.0	219.0	206.4	237.6	233.1	236.3	203.0	199.5	176.4	153.8	152.7	131.1	115.7
22,5°	270.5	262.4	261.3	266.3	275.5	261.5	241.6	221.1	194.2	175.7	162.5	131.1	116.7
25,0°	288.2	300.1	309.0	333.4	336.2	342.6	259.2	233.8	209.8	175.6	158.9	131.8	124.9
27,5°	290.7	300.1	328.6	369.4	409.4	389.4	262.0	244.5	213.3	184.2	158.9	135.2	125.2
30,0°	296.4	306.1	334.1	369.2	421.6	422.3	276.9	249.8	211.9	182.8	166.7	138.2	123.8
32,5°	284.5	307.4	332.9	354.1	402.5	394.0	295.0	267.7	213.3	178.0	170.4	148.8	118.0
35,0°	269.3	284.7	306.8	322.8	365.3	367.1	309.1	276.4	218.4	176.8	171.0	146.3	100.3
37,5°	253.3	264.5	282.7	286.6	314.1	312.5	316.6	276.7	219.8	187.1	169.7	123.1	82.0
40,0°	238.5	240.8	250.7	248.7	273.5	275.7	329.7	288.2	213.8	195.8	156.6	95.8	76.4
42,5°	217.9	219.3	220.2	208.2	225.9	224.3	340.0	297.3	215.6	192.2	127.4	77.9	74.9
45,0°	187.6	191.9	190.6	172.4	183.2	186.4	353.6	305.2	228.2	184.4	93.9	70.9	73.5
47,5°	166.3	163.3	161.7	140.0	147.6	151.6	365.8	305.6	237.7	169.0	77.4	70.3	71.6
50,0°	150.6	139.2	134.5	113.9	118.9	127.2	378.8	304.7	239.3	140.1	74.4	70.0	69.8
52,5°	135.7	119.0	114.3	96.4	101.0	107.0	390.6	301.0	231.0	112.3	77.4	70.3	68.2
55,0°	118.9	99.4	95.1	79.4	81.3	86.5	396.8	302.0	216.0	96.2	78.7	69.8	66.8
57,5°	106.3	83.8	79.2	67.3	68.2	76.5	402.0	304.5	181.6	85.6	76.5	66.3	68.2
60,0°	95.1	71.7	67.9	57.8	60.4	69.1	388.5	282.9	136.9	79.2	70.5	67.0	68.9
62,5°	90.9	62.7	55.4	50.7	54.7	61.3	325.8	234.4	111.1	73.0	66.6	67.3	67.9
65,0°	81.5	56.5	48.7	45.2	49.8	54.2	267.2	192.4	107.5	79.2	60.4	64.3	64.7
67,5°	54.4	48.0	42.7	40.7	44.6	45.7	286.1	183.9	124.5	73.7	56.7	60.4	58.5
70,0°	44.5	44.5	38.4	37.2	40.6	40.4	479.6	269.3	160.5	73.5	59.3	58.6	56.0
72,5°	38.3	37.2	32.6	33.7	35.3	34.0	552.2	281.0	151.8	48.0	49.6	54.0	51.0
75,0°	34.2	35.6	31.5	28.7	28.3	26.6	485.6	304.9	146.9	43.9	44.5	47.1	47.8
77,5°	31.7	29.8	30.6	22.1	20.6	20.2	316.4	358.7	160.5	42.2	39.7	43.0	42.5
80,0°	25.9	21.4	26.0	17.0	16.7	15.9	171.7	283.3	188.8	39.5	34.7	36.7	34.4
82,5°	17.7	16.8	19.1	14.9	14.2	13.5	127.2	118.7	89.1	29.1	29.8	29.1	28.3
85,0°	14.0	14.4	14.2	12.0	11.9	12.0	66.4	48.9	42.9	31.5	25.3	26.0	25.2
87,5°	12.0	11.3	11.3	11.0	11.2	11.0	17.4	17.5	16.7	20.4	22.3	24.3	22.3
90,0°	11.0	11.0	10.8	10.6	10.6	10.6	14.2	13.5	14.9	17.4	20.6	21.3	18.6
92,5°	10.8	10.6	10.6	10.6	10.6	10.6	12.6	12.8	13.8	16.1	17.2	16.7	14.2
95,0°	10.8	10.6	10.6	10.6	10.6	10.6	12.0	12.2	12.6	13.1	12.8	12.2	11.0
97,5°	10.8	10.6	10.6	10.6	10.6	10.6	11.9	11.7	11.3	11.3	11.0	10.6	10.3
100,0°	10.8	10.6	10.8	10.6	10.6	10.6	11.7	11.7	11.3	11.2	10.8	10.6	10.5
102,5°	10.8	10.8	10.8	10.6	10.6	10.6	11.7	11.5	11.3	11.2	10.8	10.6	10.3
105,0°	11.2	10.8	10.8	10.6	10.6	10.6	11.5	11.5	11.2	11.2	10.6	10.5	10.5
107,5°	11.0	11.0	11.0	10.8	10.6	11.0	11.7	11.5	11.3	11.2	10.8	10.6	10.5
110,0°	11.0	11.0	11.0	10.6	10.6	10.6	11.5	11.5	11.2	11.2	10.6	10.5	10.5
112,5°	11.2	11.2	11.0	10.8	10.6	10.6	11.5	11.5	11.0	11.2	10.6	10.8	10.5

Photometric test report

Family CITY-LIGHT 400 LED	Order number: 5XA5303FB14HP EAN: 4058352438008	LP number 58723_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.0	0.0
2,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	1.1	0.0	0.0
5,0°	3.9	5.3	5.0	6.6	5.1	6.2	5.0	6.0	4.6	5.7	4.3	0.1	0.1
7,5°	15.4	19.3	21.1	23.4	25.2	25.9	22.9	25.5	23.0	26.2	24.4	0.5	0.6
10,0°	25.0	27.6	27.8	34.2	33.5	31.9	30.6	30.1	29.9	30.5	31.9	1.9	2.5
12,5°	66.8	71.6	60.9	54.4	47.1	42.0	37.6	37.4	37.9	35.4	35.1	4.1	6.6
15,0°	85.7	83.6	81.1	85.7	61.5	52.4	43.2	42.7	41.5	39.3	37.2	7.8	14.4
17,5°	92.8	83.8	72.1	79.2	58.6	51.2	49.2	45.7	44.8	43.9	47.5	12.0	26.4
20,0°	98.7	91.8	90.5	91.2	78.7	58.6	46.2	41.5	42.3	44.3	46.8	16.5	42.8
22,5°	106.5	95.1	87.0	85.4	69.6	56.3	47.7	41.1	40.9	44.3	45.0	20.8	63.6
25,0°	107.5	91.9	77.2	66.8	56.2	47.8	45.0	40.4	39.9	40.7	40.4	25.0	88.6
27,5°	110.9	82.4	65.4	52.4	47.8	44.5	41.8	37.7	36.0	37.0	36.8	28.3	116.8
30,0°	93.2	62.9	52.3	48.7	48.7	45.9	42.2	37.2	34.2	34.5	34.0	30.6	147.4
32,5°	83.3	64.8	57.6	54.0	48.9	43.0	38.6	34.5	30.5	32.1	31.9	33.0	180.5
35,0°	76.5	69.6	63.4	57.9	53.1	46.6	40.0	34.9	30.3	30.3	29.1	35.3	215.8
37,5°	73.5	68.4	62.0	56.2	51.7	46.1	40.0	34.4	31.4	31.0	30.8	36.5	252.3
40,0°	72.1	66.8	61.3	55.4	50.1	44.5	38.3	33.0	31.0	30.3	30.1	37.1	289.4
42,5°	71.4	66.1	60.9	54.6	49.4	43.0	36.1	30.8	28.5	27.1	27.3	37.3	326.7
45,0°	70.3	65.5	60.9	53.3	46.8	39.9	34.0	29.4	26.6	25.2	25.2	37.6	364.3
47,5°	68.9	64.3	59.7	51.4	44.1	37.4	31.7	27.3	24.3	23.0	23.0	38.3	402.7
50,0°	67.1	62.7	58.5	49.4	42.2	35.4	29.4	25.5	22.3	21.4	21.3	39.0	441.6
52,5°	64.7	60.9	57.2	47.1	39.9	33.1	27.6	23.7	21.1	20.0	19.8	39.4	481.0
55,0°	62.4	59.7	55.8	45.0	37.2	30.8	25.7	22.1	19.7	18.6	18.1	40.0	521.0
57,5°	60.9	57.6	53.9	42.9	34.7	28.9	23.9	20.7	18.6	17.5	17.4	41.4	562.4
60,0°	60.4	57.0	51.2	40.2	32.1	26.6	22.3	19.5	17.7	16.5	16.3	43.7	606.0
62,5°	59.2	56.2	49.2	38.1	29.6	24.6	21.3	18.6	16.8	15.8	15.6	45.7	651.7
65,0°	60.2	54.0	46.4	35.8	27.3	23.0	20.0	17.7	16.1	15.2	14.9	45.6	697.2
67,5°	58.5	53.3	43.9	36.7	26.0	21.8	19.3	17.2	15.8	14.9	14.5	44.4	741.7
70,0°	55.8	51.6	46.4	39.0	26.9	20.7	18.2	16.5	15.6	14.5	14.2	47.2	788.8
72,5°	51.4	44.8	38.8	31.2	24.8	19.1	17.2	15.6	14.7	13.8	13.1	44.2	833.0
75,0°	46.6	36.1	35.4	24.4	21.4	17.5	16.1	14.7	13.8	12.8	12.0	36.9	869.9
77,5°	40.9	32.4	28.5	21.8	19.3	16.5	15.1	13.8	12.9	11.9	11.3	28.9	898.8
80,0°	31.2	25.9	23.6	20.9	18.4	15.8	14.4	12.9	12.0	11.3	10.6	19.8	918.6
82,5°	24.4	22.0	19.7	19.7	17.2	14.9	13.6	12.2	11.5	10.8	10.3	11.9	930.4
85,0°	21.3	18.6	18.1	16.8	15.9	13.8	12.8	11.7	11.0	10.5	9.6	7.8	938.2
87,5°	18.6	15.4	14.9	14.5	13.6	12.2	11.7	10.6	10.5	9.7	9.2	5.1	943.3
90,0°	16.1	13.1	12.0	11.3	11.2	10.5	10.6	10.1	9.7	9.0	8.1	4.0	947.3
92,5°	12.9	11.2	10.6	10.1	9.7	9.6	9.4	9.0	9.0	8.7	7.8	3.4	950.7
95,0°	10.6	10.1	9.9	9.6	9.4	9.4	9.2	9.0	8.9	8.7	7.8	3.1	953.8
97,5°	10.1	9.9	9.7	9.6	9.4	9.4	9.4	9.0	8.9	8.7	7.8	2.9	956.7
100,0°	10.1	9.9	9.9	9.7	9.4	9.4	9.4	9.2	9.0	8.9	8.1	2.9	959.6
102,5°	10.1	10.1	9.7	9.7	9.7	9.4	9.4	9.4	9.0	8.9	8.1	2.9	962.4
105,0°	10.3	10.1	9.9	9.7	9.7	9.7	9.4	9.4	9.0	9.0	8.1	2.8	965.3
107,5°	10.1	10.1	10.1	9.7	9.9	9.7	9.6	9.4	9.2	9.2	8.1	2.8	968.1
110,0°	10.3	10.1	10.3	9.9	9.9	9.9	9.6	9.4	9.4	9.2	8.5	2.8	970.8
112,5°	10.1	10.1	10.3	9.9	10.1	9.9	9.7	9.6	9.4	8.9	8.1	2.7	973.6

Photometric test report

Family CITY-LIGHT 400 LED	Order number: 5XA5303FB14HP EAN: 4058352438008	LP number 58723_16
-------------------------------------	---	------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	11.5	11.5	11.5	11.5	11.3	11.5	11.2	11.2	11.3	11.2	11.3	11.3	11.3
117,5°	11.5	11.5	11.5	11.5	11.3	11.3	11.2	11.2	11.2	11.3	11.5	11.3	11.3
120,0°	11.2	11.3	11.3	11.3	11.2	11.2	11.2	11.0	11.0	11.2	11.5	11.5	11.3
122,5°	11.2	11.2	11.2	11.2	11.3	11.2	11.2	11.0	11.2	11.2	11.5	11.7	11.3
125,0°	10.8	11.2	11.0	11.2	11.0	11.2	11.0	11.0	11.0	11.2	11.3	11.5	11.3
127,5°	10.8	10.8	10.8	11.0	11.0	11.0	11.0	10.8	10.8	11.0	11.3	11.5	11.3
130,0°	10.8	10.8	10.6	10.6	10.6	10.8	10.6	10.8	10.8	11.0	11.2	11.5	11.3
132,5°	10.5	10.5	10.5	10.5	10.6	10.6	10.6	10.6	10.6	10.6	11.0	11.2	11.0
135,0°	10.1	10.1	10.1	10.3	10.3	10.3	10.5	10.5	10.5	10.6	10.6	11.0	10.8
137,5°	9.9	9.9	9.9	9.9	9.9	10.1	10.1	10.1	10.3	10.3	10.5	10.6	10.5
140,0°	9.4	9.7	9.7	9.7	9.6	9.7	9.7	9.7	9.9	10.1	10.1	10.3	10.3
142,5°	9.0	9.4	9.2	9.2	9.2	9.4	9.4	9.6	9.7	9.7	9.9	10.1	10.1
145,0°	8.9	9.0	9.0	9.0	9.0	9.2	9.2	9.4	9.6	9.6	9.7	9.9	9.7
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT 400 LED	Order number: 5XA5303FB14HP EAN: 4058352438008	LP number 58723_16
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	11.2	11.2	11.0	10.6	10.3	10.3	11.3	11.5	11.2	11.2	10.8	10.6	10.5
117,5°	11.3	11.2	11.0	10.6	9.9	9.9	11.3	11.2	11.2	10.8	10.6	10.5	10.5
120,0°	11.3	11.2	11.0	10.5	9.6	9.6	11.2	11.2	10.8	10.8	10.6	10.5	10.3
122,5°	11.3	11.0	11.0	10.1	9.4	9.2	11.0	11.0	10.6	10.8	10.3	10.5	10.1
125,0°	11.2	11.0	10.6	10.1	9.2	9.2	10.6	10.8	10.5	10.5	10.3	10.1	10.1
127,5°	11.2	11.0	10.6	9.9	9.0	8.9	10.6	10.6	10.3	10.5	10.1	10.1	9.7
130,0°	10.8	10.8	10.5	9.6	8.9	8.5	10.5	10.5	10.1	10.3	9.9	9.7	9.6
132,5°	10.8	10.6	10.3	9.0	8.1	7.8	10.3	10.3	10.1	10.1	9.7	9.6	9.4
135,0°	10.6	10.3	9.7	8.1	7.1	6.0	9.9	9.9	9.6	9.7	9.6	9.4	9.2
137,5°	10.3	9.9	9.0	7.1	5.5	3.9	9.7	9.6	9.2	9.4	9.2	9.2	9.0
140,0°	10.1	9.7	8.5	6.2	4.4	3.2	9.4	9.4	8.9	9.2	8.9	8.9	8.5
142,5°	9.9	9.2	7.6	5.8	4.1	2.8	8.9	9.0	8.9	8.9	8.3	8.5	8.1
145,0°	9.7	8.9	7.1	5.1	3.7	2.8	8.9	8.7	8.5	8.5	8.1	8.1	8.1
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	10.1	10.1	10.3	10.1	10.1	9.9	9.7	9.7	9.4	8.3	7.8	2.7	976.2
117,5°	10.1	10.1	9.9	10.1	10.1	9.9	9.9	9.9	9.2	7.8	7.4	2.6	978.8
120,0°	10.1	9.7	9.9	10.1	9.9	9.9	9.9	9.9	9.2	7.4	7.4	2.5	981.3
122,5°	9.9	9.7	9.9	9.7	9.9	9.9	9.9	9.9	9.0	7.1	7.1	2.4	983.7
125,0°	9.7	9.6	9.6	9.7	9.9	9.9	9.9	9.7	8.7	6.7	7.1	2.3	986.1
127,5°	9.7	9.4	9.4	9.4	9.7	9.7	9.9	9.7	8.7	6.7	6.7	2.2	988.3
130,0°	9.4	9.2	9.2	9.2	9.6	9.6	9.6	9.7	8.3	6.6	6.7	2.1	990.4
132,5°	9.2	9.2	9.0	9.0	9.4	9.4	9.4	9.4	7.8	6.0	6.0	2.0	992.4
135,0°	9.0	8.9	8.7	8.9	8.9	9.0	9.0	8.7	7.1	5.7	5.3	1.8	994.2
137,5°	8.9	8.5	8.5	8.3	8.5	8.5	8.7	8.0	6.4	5.0	4.3	1.7	995.8
140,0°	8.5	8.3	8.3	8.1	8.3	8.3	8.3	7.3	6.0	5.0	4.3	1.5	997.4
142,5°	8.1	8.0	8.0	7.8	7.8	7.8	7.8	6.7	5.7	4.8	4.6	1.4	998.7
145,0°	8.0	7.8	7.8	7.6	7.8	7.4	7.3	6.2	5.5	5.0	4.3	1.3	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT 400 LED	Order number: 5XA5303FB14HP EAN: 4058352438008	LP number 58723_16
-------------------------------------	---	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	2960	25.6	27.4	26.5
95	241	2809	24.1	25.6	24.8
90	229	2669	22.7	24.2	23.4
85	216	2517	21.3	22.6	22.0
80	203	2366	19.8	21.1	20.5
75	190	2214	18.4	19.5	19.0
70	178	2074	17.1	18.2	17.6
65	165	1923	15.8	16.7	16.2
60	152	1771	14.5	15.4	15.0
55	140	1631	13.4	14.1	13.8
50	127	1480	12.2	12.8	12.5
45	114	1329	10.9	11.6	11.2
40	102	1189	9.8	10.5	10.2
35	89	1037	8.7	9.2	9.0
30	76	886	7.6	7.9	7.8
25	63	734	6.5	6.8	6.6
20	51	594	5.4	5.7	5.6
17	42	490	4.7	4.9	4.8