

Order No.: 5EA3BG01 | GTIN (EAN): 4058352524176


Product description: SConWi,MastBoGPS



SITECO Connect WirelessMast Box GPS, luminaire controller, communication: 2.4GHz, local mesh radio network, DALI, control: local setting and operation with USB stick, by time, by timer, by weekday, with radio clock, optionally via radio push button, sensor technology: GPS, automatic adjustment of the DALI dimming curve, optionally adjustable manually, controls one DALI ECG individually or up to 9 DALI ECGs via broadcast, installation type: surface-mounted, installation location: to mast, of plastic, voltage: 230V, voltage type: AC, protection rating (complete): IP65, insulation class (complete): insulation class II (safety insulation), certification: CE, packaging unit: 1 piece, metal fastening straps not included in delivery

IP 65  

Wt. (kg): 0.8
 GTIN (EAN): 4058352524176

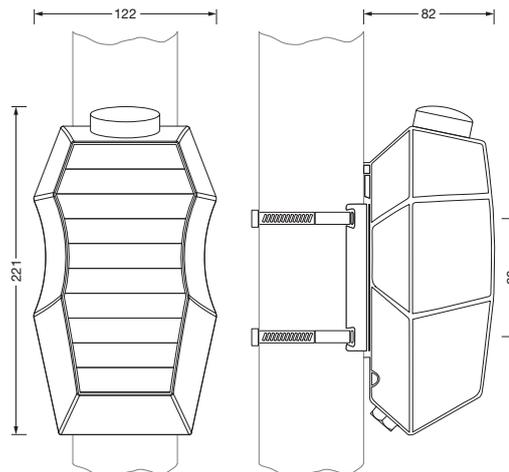

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
 Tolerances related to thermal, electrical and photometric data according to IEC 62722
 Issued 13.03.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5EA3BG01 | GTIN (EAN): 4058352524176

Detailed technical description: SConWi,MastBoGPS



Key data

- System family: SITECO Connect
- Product type: luminaire controller
- Product name: SITECO Connect Wireless
- Order No.: 5EA3BG01

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI, automatic adjustment of the DALI dimming curve, optionally adjustable manually, controls one DALI ECG individually or up to 9 DALI ECGs via broadcast

Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): -25..+80°C
- Certification, designation: CE

Material, Colour

- housing: plastic, dark grey

Mounting

- Mounting method, mounting location: surface-mounted, to mast
- Mounting height: 0..6m

Electrical connection


- Nominal voltage: 230V, AC

Dimensions, Weight

- Weight: 0.8kg

Order No.: 5EA3BG01 | GTIN (EAN): 4058352524176

Dimensions: SConWi,MastBoGPS

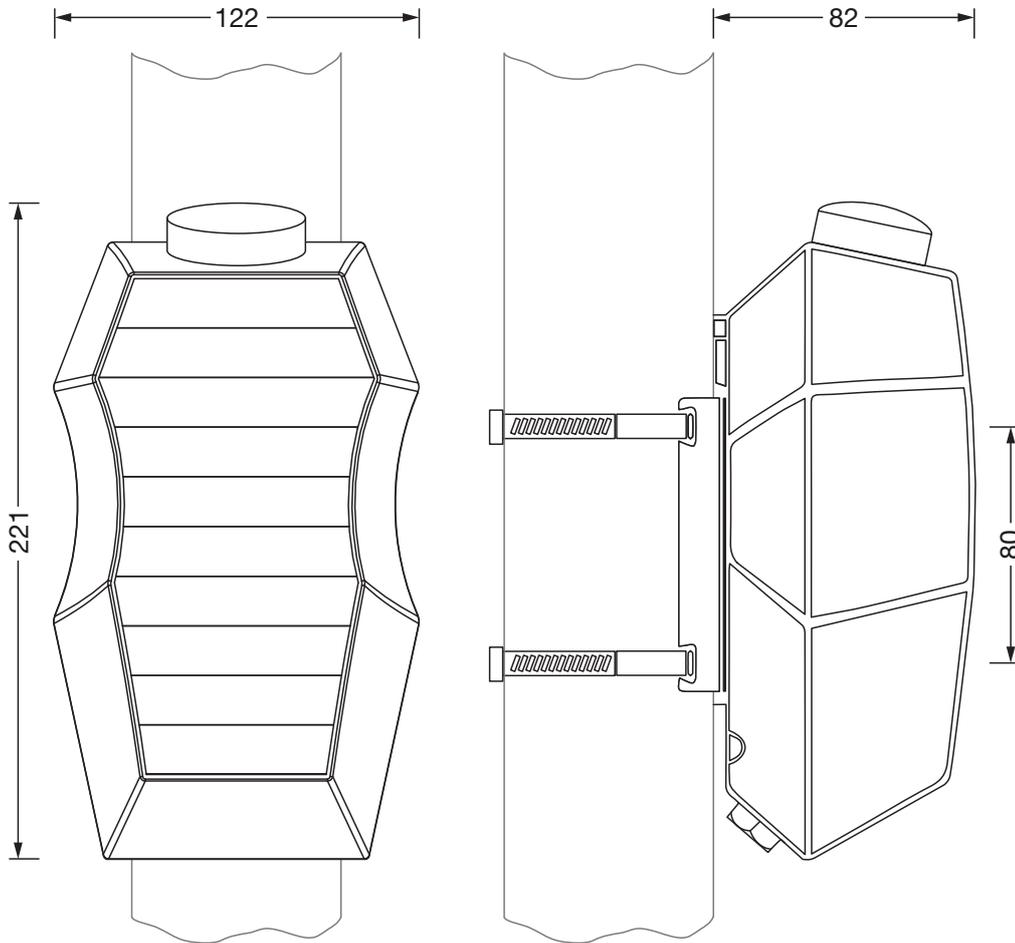

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 13.03.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -