

Order No.: 5EA3BEL01 | GTIN (EAN): 4058352641316


Product description: SConWi,MastBoxMotLow



SITECO Connect WirelessMast Box Motion Low, sensor, communication: 2.4GHz, local mesh radio network, DALI, control: local setting and operation with USB stick, by movement, optionally via radio push button, sensor technology: 1 PIR movement sensor, automatic adjustment of the DALI dimming curve, optionally adjustable manually, controls one DALI ECG individually or up to 9 DALI ECGs via broadcast, installation type: surface-mounted, installation location: to mast, of plastic, voltage: 230V, voltage type: AC, PIR movement sensor, protection rating (complete): IP65, certification: CE, packaging unit: 1 piece, metal fastening straps not included in delivery

IP 65 CE


Wt. (kg): 0.8  
GTIN (EAN): 4058352641316

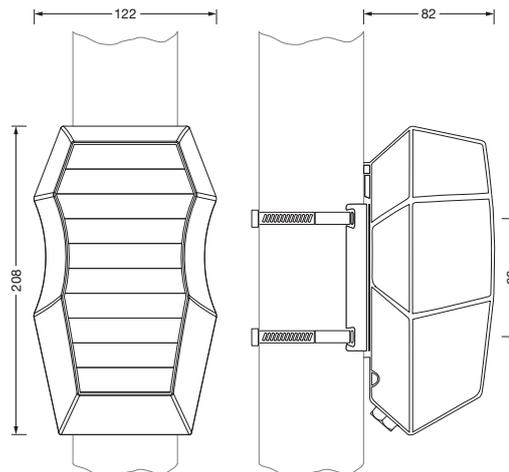

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 13.03.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5EA3BEL01 | GTIN (EAN): 4058352641316

Detailed technical description: SConWi,MastBoxMotLow

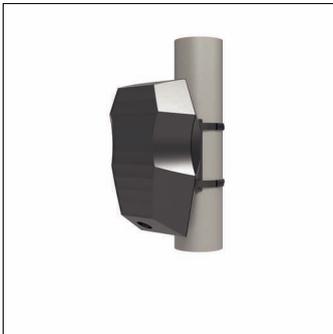

#### Key data

- System family: SITECO Connect 31 Wireless
- Product type: sensor
- Product name: SITECO Connect Wireless
- Order No.: 5EA3BEL01

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Operating device:

- Control: DALI, automatic adjustment of the DALI dimming curve, optionally adjustable manually, controls one DALI ECG individually or up to 9 DALI ECGs via broadcast

#### Certificates, Standards

- Protection rating: IP65
- Temperature range (operation): -25..+80°C
- Certification, designation: CE

#### Material, Colour

- housing: plastic, dark grey

#### Mounting

- Mounting method, mounting location: surface-mounted, to mast
- Mounting height: 0..6m

#### Electrical connection

- Nominal voltage: 230V, AC

#### Dimensions, Weight

- Weight: 0.8kg


#### Inputs

#### PIR movement sensor



- Detection range: max. ø11m

Order No.: 5EA3BEL01 | GTIN (EAN): 4058352641316

Dimensions: SConWi,MastBoxMotLow

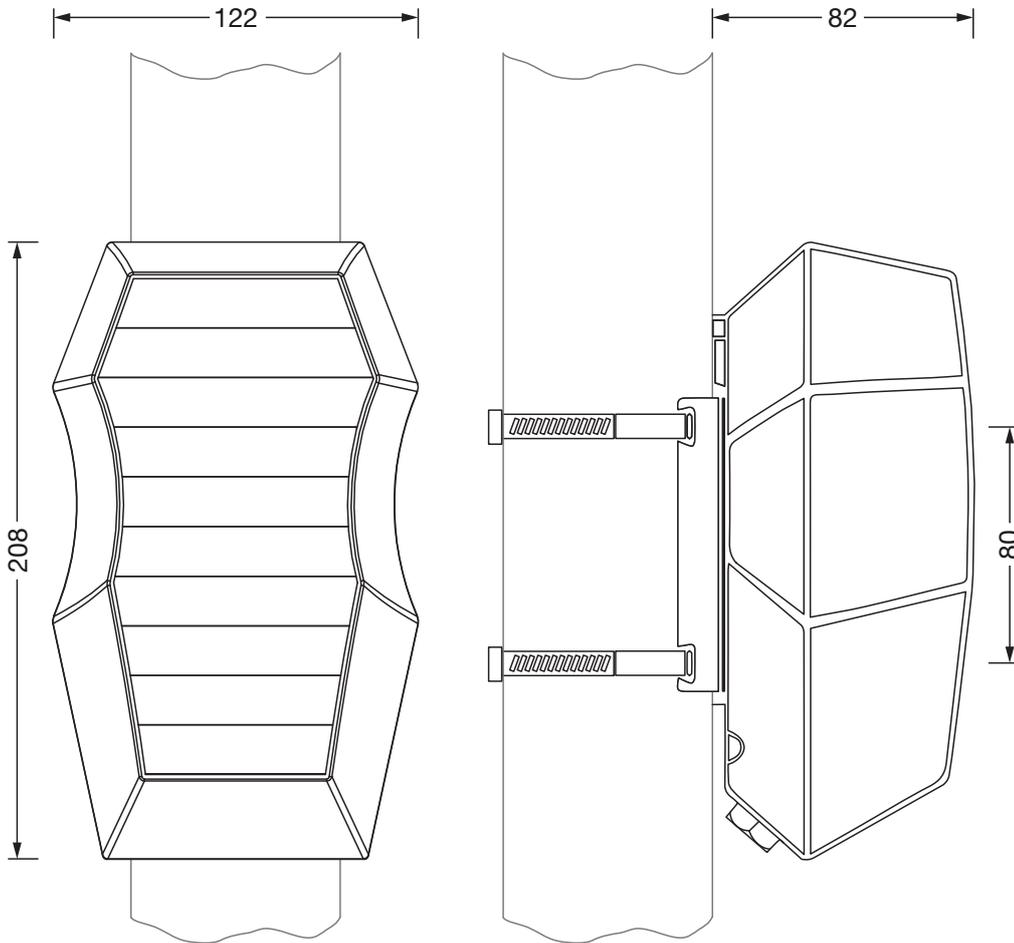

Detection zone "Mast Box Motion Low"  
5EA3BEL01



Mounting height	X axis	Y axis
5.0 m	8.5 m	8.8 m
6.0 m	10.2 m	10.6 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 13.03.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -