

Order No.: 5EA3BEL01 | GTIN (EAN): 4058352641316

Product description: SConWi, MastBoxMotLow




SITECO Connect WirelessMast Box Motion Low, installation type: surface-mounted, installation location: to mast, of plastic, voltage: 230V, voltage type: AC, 2.4GHz, local mesh radio network, DALI, local setting and operation with USB stick, by movement, optionally via radio push button, 1 PIR movement sensor, radio, 2.4GHz, protection rating (complete): IP65, certification: CE, packaging unit: 1 piece, metal fastening straps not included in delivery

IP 65 (€

Wt. (kg): 0.8

GTIN (EAN): 4058352641316





Order No.: 5EA3BEL01 | GTIN (EAN): 4058352641316 Detailed technical description: SConWi,MastBoxMotLow



Key data

Product type: sensor

 Product name: SITECO Connect Wireless

Order No.: 5EA3BEL01

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI

Certificates, Standards

- Protection rating: IP65
- Temperature range (operation): -25..+80°C
- Certification, designation: CE

Material, Colour

- housing: plastic, dark grey
- Colour specification: dark grey

Mounting

- Mounting method, mounting location: surface-mounted, to mast
- Mounting height: 0..6m

Electrical connection

- Nominal voltage: 230V, AC


Dimensions, Weight


- Weight: 0.8kg



Order No.: 5EA3BEL01 | GTIN (EAN): 4058352641316

Dimensions: SConWi,MastBoxMotLow

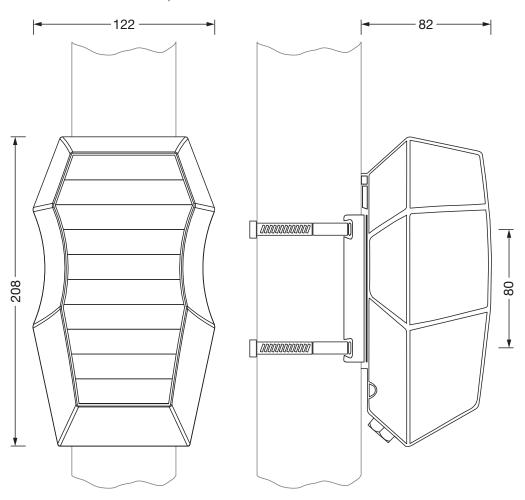



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 04.05.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -