

## Order No.: 58FSHD1 | GTIN (EAN): 4058352431931

## Product description: Mon11/21, D-ecoMa, HC1



Monsun® 11/21, DALleco master kit, installation type: recessed, with cable with RJ-11 plug + 4x single conductor 0.75mm², AC, 50/60Hz, length: 250mm, width: 34mm, height: 29mm, DALleco controller, master, sensor HC1, light sensor deactivated, certification: CE, permissible operating ambient temperature: -25..+35°C, packaging unit: 1 piece

 $(\in$ 

Wt. (kg): 0.2

GTIN (EAN): 4058352431931



## Order No.: 58FSHD1 | GTIN (EAN): 4058352431931

### Detailed technical description: Mon11/21, D-ecoMa, HC1



#### Key data

System family: DALleco

Product type: DALleco master kitProduct name: Monsun® 11/21

- Order No.: 58FSHD1

# Lighting technology | Lamps | Control gear

#### Component 1

#### Lamps:

- Supplement: for DALI version

#### Operating device:

Control: DALleco, light sensor deactivated

#### Certificates, Standards

- Temperature range (operation): -25..+35°C
- Certification, designation: CE

#### Mounting


- Mounting method, mounting location: recessed, in the luminaire housing
- Supplement: for housing width = 84mm

#### **Electrical connection**

 Connection: cable with RJ-11 plug + 4x single conductor 0.75mm²

#### **Dimensions, Weight**

Length: 250mmWidth: 34mmHeight: 29mmWeight: 0.2kg

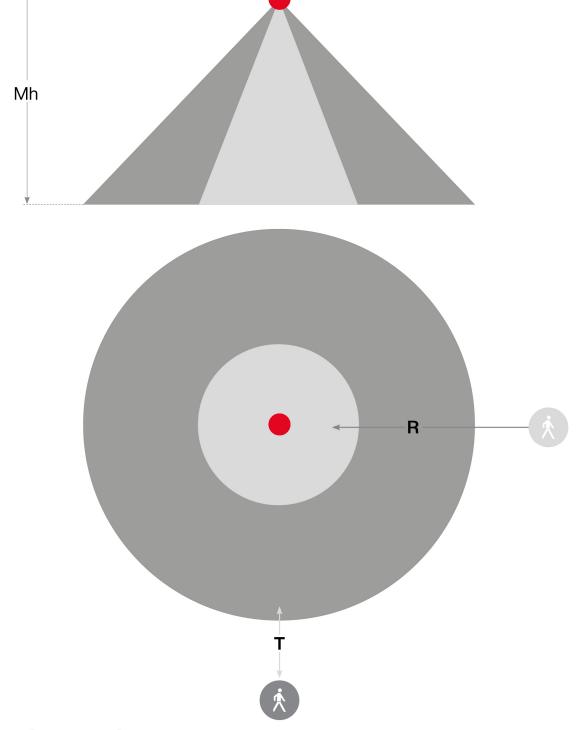

## Sensor HC1

Mh	R	Т
3m (default)	ø = 12m	ø = 14m
3m	ø = 424m	ø = 430m

Richtwert: Reichweite abhängig von örtlichen Gegebenheiten Guide value: range depending on local conditions

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -