

Order No.: 5EA3BS01 | **GTIN (EAN):** 4058352524183


Product description: SConWi,MastBoxStandard



SITECO Connect WirelessMast Box Standard, luminaire controller, communication: 2.4GHz, local mesh radio network, DALI, control: local setting and operation with USB stick, optionally via radio push button, automatic adjustment of the DALI dimming curve, optionally adjustable manually, controls one DALI ECG individually or up to 9 DALI ECGs via broadcast, installation type: surface-mounted, installation location: to mast, of plastic, voltage: 230V, voltage type: AC, protection rating (complete): IP65, insulation class (complete): insulation class II (safety insulation), certification: CE, packaging unit: 1 piece, metal fastening straps not included in delivery

IP 65  

Wt. (kg): 0.6
GTIN (EAN): 4058352524183

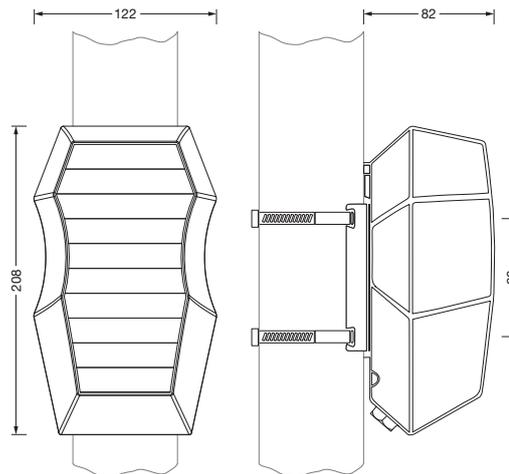

Order No.: 5EA3BS01 | GTIN (EAN): 4058352524183

Detailed technical description: SConWi,MastBoxStandard



Key data

- System family: SITECO Connect
- Product type: luminaire controller
- Product name: SITECO Connect Wireless
- Order No.: 5EA3BS01

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI, automatic adjustment of the DALI dimming curve, optionally adjustable manually, controls one DALI ECG individually or up to 9 DALI ECGs via broadcast

Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): -25..+80°C
- Certification, designation: CE

Material, Colour

- housing: plastic, dark grey

Mounting

- Mounting method, mounting location: surface-mounted, to mast
- Mounting height: 0..6m

Electrical connection


- Nominal voltage: 230V, AC

Dimensions, Weight

- Weight: 0.6kg

Order No.: 5EA3BS01 | GTIN (EAN): 4058352524183

Dimensions: SConWi, MastBoxStandard

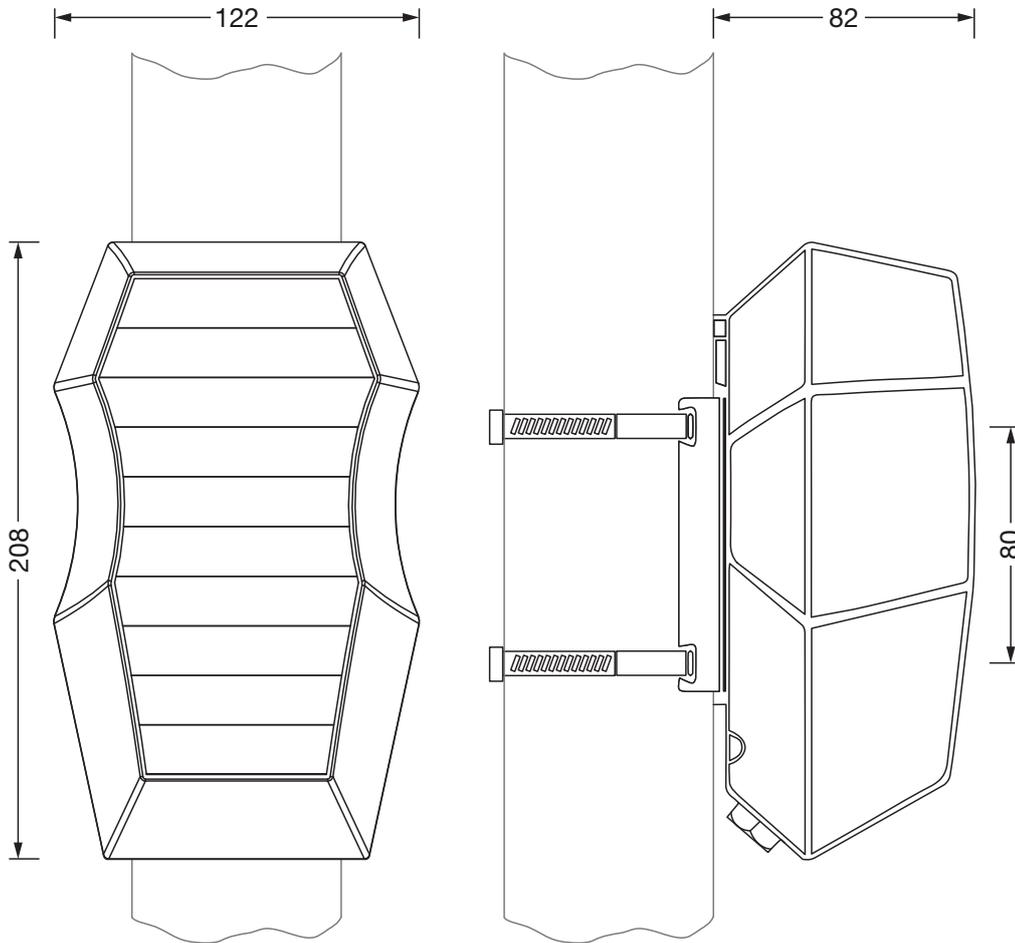

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 13.03.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -