

Order No.: 5LZ930302 | GTIN (EAN): 4058352386026


Product description: SCon11,Switch,centCtrl



SITECO Connect 11 Switch, central control, installation type: recessed, installation location: in an electrical distributor, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, voltage: 24V, voltage type: DC, 5 x Ethernet, packaging unit: 1 piece

IP 20   

Wt. (kg): 0.3  
 GTIN (EAN): 4058352386026



Order No.: 5LZ930302 | GTIN (EAN): 4058352386026

Detailed technical description: SCon11,Switch,centCtrl



#### Key data

- System family: Siteco Connect 11
- Product type: lighting management components
- Product name: SITECO Connect 11
- Order No.: 5LZ930302

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+55°C
- Certification, designation: CE

#### Material, Colour

- Colour specification: silver

#### Mounting

- Mounting method, mounting location: recessed, in an electrical distributor

#### Electrical connection

- Connection: terminal, 3-pole, max. 1.5mm<sup>2</sup>
- Nominal voltage: 24V, DC

#### Dimensions, Weight

- Length: 39mm
- Width: 73mm
- Height: 100mm
- Weight: 0.3kg


#### Outputs

##### 5x Ethernet

- Connection: socket RJ-45
- Feature: 10BASE-T/100BASE-TX ethernet

Order No.: 5LZ930302 | GTIN (EAN): 4058352386026

Dimensions: SCon11,Switch,centCtrl

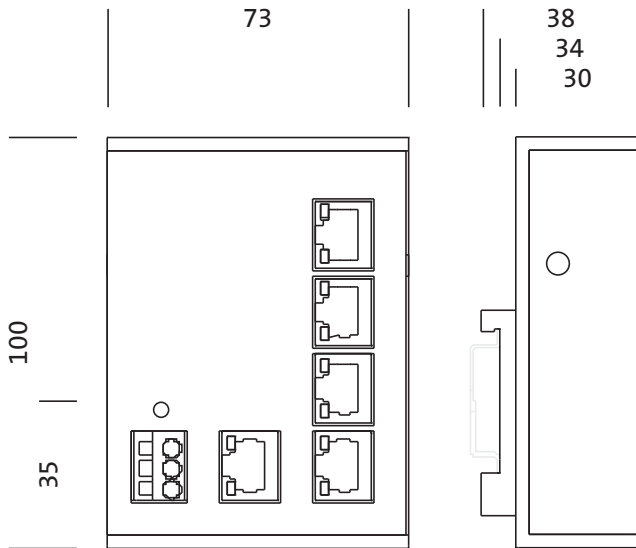

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 29.09.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -