

Order No.: 5LZ930203 | GTIN (EAN): 4058352386682


Product description: SCon11,pwr.meas.term,centCtrl,K-Bus



SITECO Connect 11 power measurement terminal, central control, installation type: recessed, installation location: in an electrical distributor, protection rating (complete): IP20, certification: CE, voltage: 24V, voltage type: DC, 1 x K-Bus, packaging unit: 1 piece

IP 20 

Wt. (kg): 0.1
GTIN (EAN): 4058352386682



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 29.09.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ930203 | GTIN (EAN): 4058352386682

Detailed technical description: SCon11,pwr.meas.term,centCtrl,K-Bus



Key data

- System family: Siteco Connect 11
- Product type: lighting management components
- Product name: SITECO Connect 11
- Order No.: 5LZ930203

Certificates, Standards

- Protection rating: IP20
- Temperature range (operation): -25..+60°C
- Certification, designation: CE

Material, Colour

- Colour specification: grey

Mounting

- Mounting method, mounting location: recessed, in an electrical distributor

Electrical connection

- Nominal voltage: 24V, DC

Dimensions, Weight

- Length: 100mm
- Width: 12mm
- Height: 68mm
- Weight: 0.1kg


Inputs

1x K-Bus

- Option: system current 115mA

Order No.: 5LZ930203 | GTIN (EAN): 4058352386682

Dimensions: SCon11,pwr.meas.term,centCtrl,K-Bus

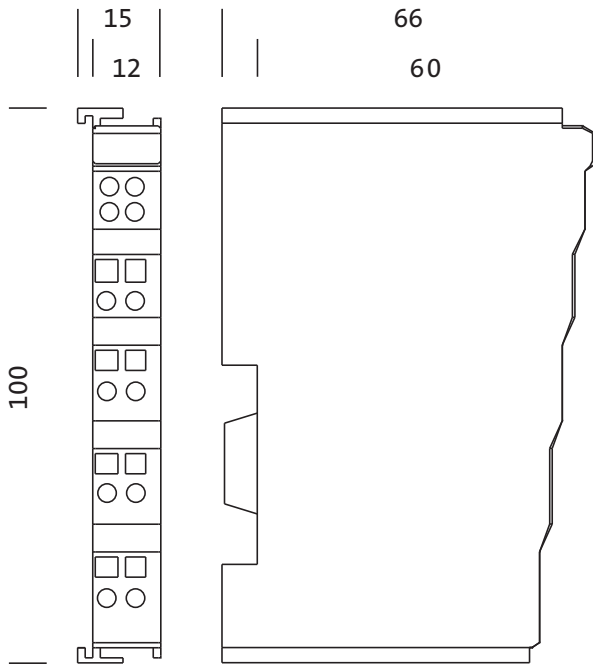

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 29.09.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -