

Order No.: 5LZ930201 | GTIN (EAN): 4058352385951


Product description: SCon11,inp.term,centCtrl,K-Bus



SITECO Connect 11 input terminal, central control, installation type: recessed, installation location: in an electrical distributor, protection rating (complete): IP20, certification: CE, voltage: 24V, voltage type: DC, 1 x K-Bus, 8 x digital switching contact, packaging unit: 1 piece

IP 20 

Wt. (kg): 0.1
GTIN (EAN): 4058352385951



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 29.09.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ930201 | GTIN (EAN): 4058352385951

Detailed technical description: SCon11,inp.term,centCtrl,K-Bus



Key data

- System family: Siteco Connect 11
- Product type: lighting management components
- Product name: SITECO Connect 11
- Order No.: 5LZ930201

Certificates, Standards

- Protection rating: IP20
- Temperature range (operation): -25..+60°C
- Certification, designation: CE

Material, Colour

- Colour specification: grey

Mounting

- Mounting method, mounting location: recessed, in an electrical distributor

Electrical connection

- Nominal voltage: 24V, DC

Dimensions, Weight

- Length: 100mm
- Width: 12mm
- Height: 68mm
- Weight: 0.1kg

Inputs

1x K-Bus


- Option: system current 15mA

8x digital switching contact

- Option: for connection of on-site push buttons

Order No.: 5LZ930201 | GTIN (EAN): 4058352385951

Dimensions: SCon11,inp.term,centCtrl,K-Bus

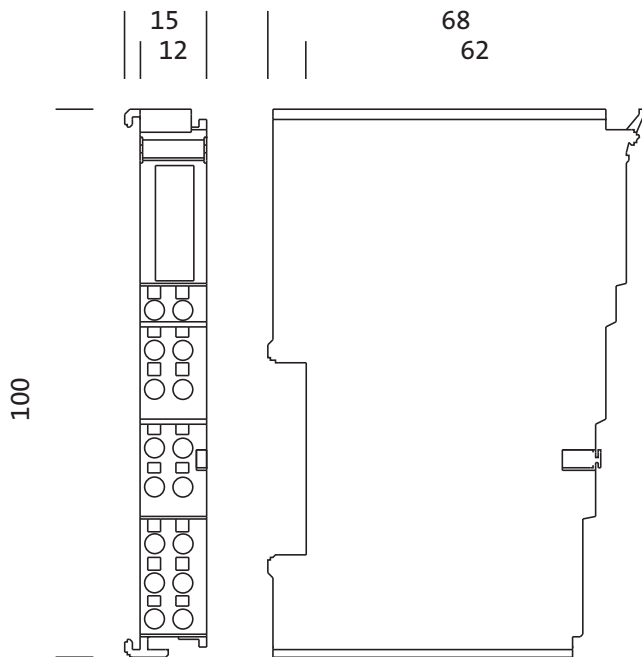

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 29.09.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -