

Order No.: 51TR6C0 | GTIN (EAN): 4058352446379


Product description: Lic, trunk.rail, L1500, sr



Licross®, trunking rail, of sheet steel, galvanised, coil coated, metallic grey (RAL 9006), length: 1.500 mm, width: 64 mm, height: 67mm, protection rating (complete): maximum IP64, depends on used inserts and accessories, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, LABS conformity tested according to VDMA 24364:2018-05, packaging unit: 1 piece



Wt. (kg): 1.9  
GTIN (EAN): 4058352446379

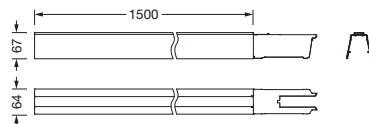

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51TR6C0 | GTIN (EAN): 4058352446379

Detailed technical description: Lic,trunk.rail,L1500,sr



#### Key data

- Product type: trunking components group (TS)
- Product name: Licross®
- Order No.: 51TR6C0

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lamps:

- Supplement: without through-wiring

#### Certificates, Standards

- Protection rating: maximum IP64, depends on used inserts and accessories
- Insulation class: insulation class I (protective earthing)
- Supplement: LABS conformity tested according to VDMA 24364:2018-05
- Certification, designation: CE, UKCA

#### Material, Colour

- trunking rail: sheet steel, galvanised, coil coated, metallic grey (RAL 9006)
- Colour specification: metallic grey (RAL 9006)

#### Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

#### Dimensions, Weight

- Length: 1500mm
- Width: 64mm
- Height: 67mm
- Weight: 1.9kg

Order No.: 51TR6C0 | GTIN (EAN): 4058352446379

Dimensions: Lic,trunk.rail,L1500,sr

