

Order No.: 5WM25CD03XN2 | **GTIN (EAN):** 4058352385364

Product description: TL13,51600lm850,DA,TSG




TL 13, tunnel luminaire, primary optical cover: cover panel, of toughened safety glass, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, connection on control gear side, LED, Mid Power LED, rated luminous flux: 51.600lm, luminous efficacy: 188lm/W, light colour: 850, colour temperature: 5000K, control gear: DALI, with connection cable with system connection, mains connection: 220..240V, AC, 50/60Hz, connection cable pre-assembled, cable length: 1m, wiring characteristics: FE05B/CPR class B2ca s1a-d1-a1, rated input power: 275W, connection on mains side, 7-pole, max. 10mm² (5G+2), with terminal, luminaire housing, of stainless steel 1.4404 (AISI316), etched and passivated, length: 1.529mm, width: 56mm, height: 36mm, e-box, of stainless steel 1.4404 (AISI316), etched and passivated, length: 510mm, width: 213mm, height: 112mm, protection rating (complete): IP66, certification: CE, packaging unit: set of 12

IP 66



Lamps:	LED
Wt. (kg):	30.1
GTIN (EAN):	4058352385364

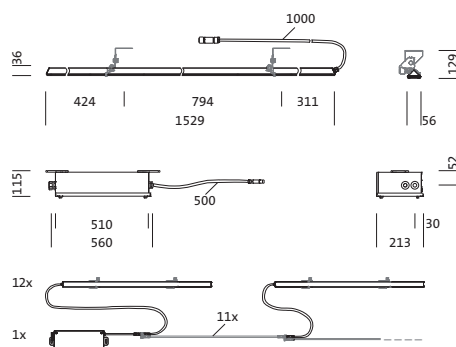

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5WM25CD03XN2 | **GTIN (EAN):** 4058352385364

Detailed technical description: TL13,51600lm850,DA,TSG



Key data

- Product type: tunnel luminaire
- Product name: TL 13
- Order No.: 5WM25CD03XN2

Dimensions, Weight

- Length: 1529mm
- Width: 56mm
- Height: 36mm
- Weight: 30.1kg

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover panel
- Symmetry: symmetric distribution
- Light emission: direct distribution

Lamps:

- Supplement: minimum bending radius:
cable diameter x 10

Operating device:

- Control gear: ECG DALI
- Control: DALI

Component 2

Component 3

Certificates, Standards

- Protection rating: IP66
- Certification, designation: CE

Material, Colour

- luminaire housing: stainless steel
1.4404 (AISI316), etched and
passivated
- Quantity: 12 piece
- e-box: stainless steel 1.4404 (AISI316),
etched and passivated
- Quantity: 1 piece
- Cover: cover panel of toughened safety
glass

Mounting

- Mounting method, mounting location:
surface-mounted, to supporting
structure, to the ceiling

Electrical connection

- Connection: connection cable with
system connection
- Nominal voltage: 220..240V, 50/60Hz,
AC
- Connection cable: pre-assembled, L=
1m




It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5WM25CD03XN2 | GTIN (EAN): 4058352385364

Dimensions: TL13,51600lm850,DA,TSG

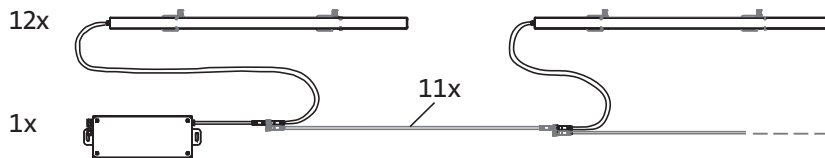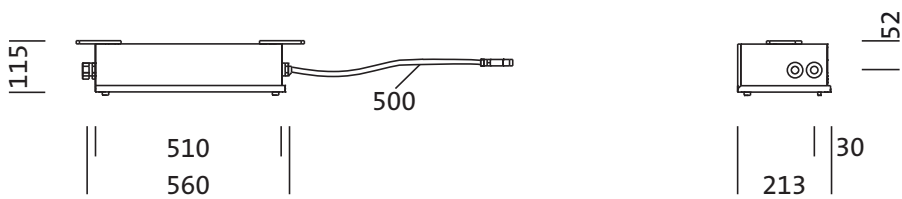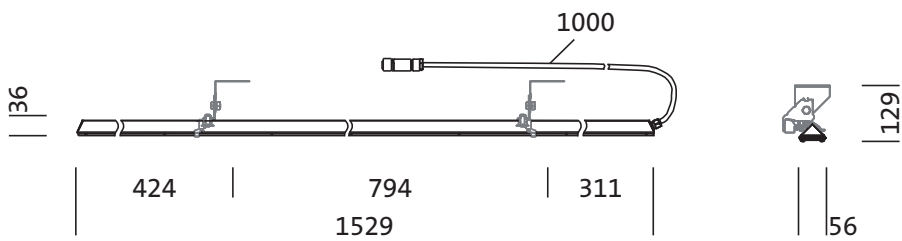

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5WM25CD03XN2 | **GTIN (EAN):** 4058352385364

Planning data: TL13,51600lm850,DA,TSG


5WM25CD03XN2: 1x LED

4058352385364

5WM25CD03XN2

LED 5000 K | CRI ≥ 80

ϕ_N 4300 lm



— C 0/180

- - - C 90/270

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com