

Order No.: 56TL1FCMA | **GTIN (EAN):** 4058352373873


Product description: LicIntbasemod



Licross® Interface MD, master, local control - self-sufficient standalone sensors, dimmable, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, voltage: 230V, voltage type: AC, 1 x 1 x DALI, 1 x relay contact, packaging unit: 1 piece



Wt. (kg): 0.5
GTIN (EAN): 4058352373873

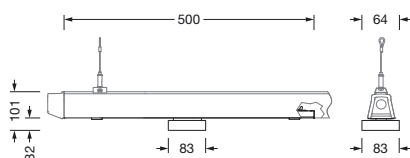

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

Order No.: 56TL1FCMA | **GTIN (EAN):** 4058352373873

Detailed technical description: LicIntbasemod



Key data

- System family: SITECO Connect 31 Logistic DALI
- Product type: base module
- Product name: Licross® Interface
- Order No.: 56TL1FCMA

1x DALI

- Connection: screw terminal, 2-pole, max. 1.5mm²
- Feature: DALI, master function, broadcast addressing, max. 30 DALI ECGs

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: internal wiring halogen-free

Operating device:

- Control: DALI, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): -20...+50°C
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- trunking rail adapter set: sheet steel, coil coated, white
- Colour specification: white

Mounting

- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 230V, 50Hz, AC

Dimensions, Weight

- Length: 500mm
- Width: 96mm
- Height: 97mm
- Weight: 0.5kg

Outputs


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 56TL1FCMA | **GTIN (EAN):** 4058352373873

Dimensions: LicIntbasemod

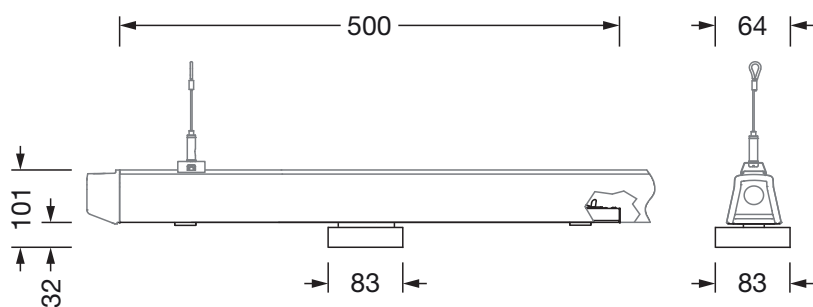

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -