


Order No.: 5MN91402 | GTIN (EAN): 4050737755007

Product description: Vega11passepartout,dir/ind




Vega 11, passepartout, light emission: direct/indirect distribution, passepartout, for luminaire, packaging unit: 1 piece

Wt. (kg): 0.5
GTIN (EAN): 4050737755007


4050737963761 + 4050737755007
5MN238DLC + 5MN91402

LED 4000K / CRI \geq 80 ϕ_N 4240 lm



Order No.: 5MN91402 | GTIN (EAN): 4050737755007

Detailed technical description: Vega11 passepartout,dir/ind



Key data

- Product type: passepartout
- Product name: Vega 11
- Order No.: 5MN91402

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light emission: direct/indirect distribution, 70:30

Dimensions, Weight


- Weight: 0.5kg

Order No.: 5MN91402 | GTIN (EAN): 4050737755007

Planning data: Vega11passepartout,dir/ind


**5MN238DLC + 5MN91402: 1x
LED 4000K / CRI ≥ 80**

4050737963761 + 4050737755007
5MN238DLC + 5MN91402
LED 4000K / CRI ≥ 80 ϕ_N 4240 lm




**5MN238DLC003 + 5MN91402:
1x LED 3000K / CRI ≥ 80**

4050737964164 + 4050737755007
5MN238DLC003 + 5MN91402
LED 3000K / CRI ≥ 80 ϕ_N 4250 lm



**5MN238DLC0S + 5MN91402:
1x LED 4000K / CRI ≥ 80**

4050737964041 + 4050737755007
5MN238DLC0S + 5MN91402
LED 4000K / CRI ≥ 80 ϕ_N 4240 lm

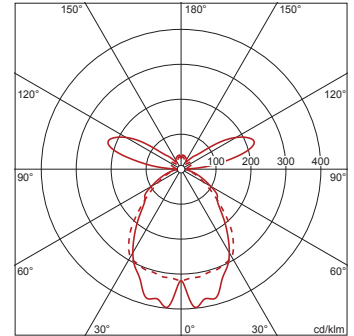

No. of luminaires in room
Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.8	0.9	1.6	1.8	4.1	4.6
30 m ²	1.2	1.3	2.4	2.6	6.1	6.6
40 m ²	1.5	1.7	3.0	3.3	7.5	8.3
50 m ²	1.8	2.0	3.6	3.9	9.1	9.9
75 m ²	2.7	2.8	5.4	5.7	14	14
100 m ²	3.5	3.7	6.9	7.3	17	18
500 m ²	15	16	31	32	77	80

Maintenance factor 0.8 Rh = Lh + 0.5 m

No. of luminaires in room
Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.8	0.9	1.6	1.8	4.1	4.6
30 m ²	1.2	1.3	2.4	2.6	6.1	6.6
40 m ²	1.5	1.6	3.0	3.3	7.5	8.2
50 m ²	1.8	2.0	3.6	3.9	9.1	9.8
75 m ²	2.7	2.8	5.4	5.7	14	14
100 m ²	3.5	3.7	6.9	7.3	17	18
500 m ²	15	16	31	32	77	79

Maintenance factor 0.8 Rh = Lh + 0.5 m

No. of luminaires in room
Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.8	0.9	1.6	1.8	4.1	4.6
30 m ²	1.2	1.3	2.4	2.6	6.1	6.6
40 m ²	1.5	1.7	3.0	3.3	7.5	8.3
50 m ²	1.8	2.0	3.6	3.9	9.1	9.9
75 m ²	2.7	2.8	5.4	5.7	14	14
100 m ²	3.5	3.7	6.9	7.3	17	18
500 m ²	15	16	31	32	77	80

Maintenance factor 0.8 Rh = Lh + 0.5 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722


Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MN91402 | GTIN (EAN): 4050737755007

Planning data: Vega11passepartout,dir/ind

**5MN238DLE + 5MN91402: 1x
LED 4000K / CRI ≥ 80**

4050737964188 + 4050737755007
5MN238DLE + 5MN91402
LED 4000K / CRI ≥ 80 ϕ_N 8030 lm




No. of luminaires in room						
Reflection factors 70/50/20						
Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.4	0.5	0.9	1.0	2.1	2.4
30 m ²	0.6	0.7	1.3	1.4	3.2	3.5
40 m ²	0.8	0.9	1.6	1.7	4.0	4.4
50 m ²	1.0	1.0	1.9	2.1	4.8	5.2
75 m ²	1.4	1.5	2.9	3.0	7.2	7.5
100 m ²	1.8	1.9	3.7	3.9	9.2	9.7
500 m ²	8.2	8.4	16	17	41	42

Maintenance factor 0.8 Rh = Lh + 0.5 m

**5MN238DLE003 + 5MN91402:
1x LED 3000K / CRI ≥ 80**

4050737963846 + 4050737755007
5MN238DLE003 + 5MN91402
LED 3000K / CRI ≥ 80 ϕ_N 7210 lm




No. of luminaires in room						
Reflection factors 70/50/20						
Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.5	0.5	1.0	1.1	2.4	2.7
30 m ²	0.7	0.8	1.4	1.6	3.6	3.9
40 m ²	0.9	1.0	1.8	1.9	4.4	4.9
50 m ²	1.1	1.2	2.1	2.3	5.4	5.8
75 m ²	1.6	1.7	3.2	3.3	8.0	8.4
100 m ²	2.0	2.2	4.1	4.3	10	11
500 m ²	9.1	9.4	18	19	46	47

Maintenance factor 0.8 Rh = Lh + 0.5 m

**5MN238DLE0S + 5MN91402:
1x LED 4000K / CRI ≥ 80**

4050737963747 + 4050737755007
5MN238DLE0S + 5MN91402
LED 4000K / CRI ≥ 80 ϕ_N 8030 lm

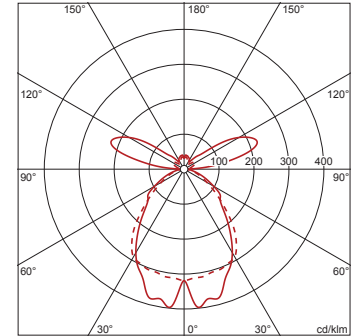

No. of luminaires in room						
Reflection factors 70/50/20						
Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.4	0.5	0.9	1.0	2.1	2.4
30 m ²	0.6	0.7	1.3	1.4	3.2	3.5
40 m ²	0.8	0.9	1.6	1.7	4.0	4.4
50 m ²	1.0	1.0	1.9	2.1	4.8	5.2
75 m ²	1.4	1.5	2.9	3.0	7.2	7.5
100 m ²	1.8	1.9	3.7	3.9	9.2	9.7
500 m ²	8.2	8.4	16	17	41	42

Maintenance factor 0.8 Rh = Lh + 0.5 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MN91402 | GTIN (EAN): 4050737755007


Planning data: Vega11passepartout,dir/ind

5MN238DLE0S3 + 5MN91402:
1x LED 3000K / CRI ≥ 80

4050737964263 + 4050737755007

5MN238DLE0S3 + 5MN91402

LED 3000K / CRI ≥ 80 ϕ_N 7210 lm



No. of luminaires in room

Reflection factors 70/50/20

Em(x)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.5	0.5	1.0	1.1	2.4	2.7
30 m ²	0.7	0.8	1.4	1.6	3.6	3.9
40 m ²	0.9	1.0	1.8	1.9	4.4	4.9
50 m ²	1.1	1.2	2.1	2.3	5.4	5.8
75 m ²	1.6	1.7	3.2	3.3	8.0	8.4
100 m ²	2.0	2.2	4.1	4.3	10	11
500 m ²	9.1	9.4	18	19	46	47

Maintenance factor 0.8

Rh = Lh + 0.5 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -