

Order No.: 5MT217704WD | **GTIN (EAN):** 4058352219218


Product description: Tar21,LED6140lm840,0/1,surf



Taris® 21, office luminaire, primary anti-glare with micro louvre, primary optical cover: axial lens, of PMMA, structured, CAT 2 ($L \leq 1500 \text{cd/m}^2$), light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 6.140lm, luminous efficacy: 166lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG, with terminal, 5-pole, mains connection: 230V, AC, 50Hz, rated input power: 37W, housing, luminaire housing, of plastic, traffic white (RAL 9016), length: 1.510mm, width: 134mm, height: 50mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, protection symbol: F, impact resistance: IK02, permissible operating ambient temperature: 0..+35°C, standard: EN 50419, packaging unit: 1 piece



Lamps: LED
 Wt. (kg): 4.1
 GTIN (EAN): 4058352219218

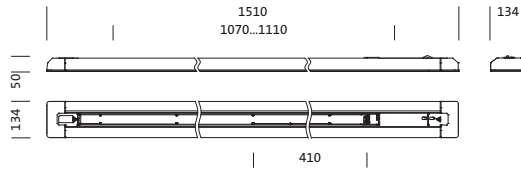

Order No.: 5MT217704WD | GTIN (EAN): 4058352219218

Detailed technical description: Tar21,LED6140lm840,0/1,surf



Key data

- Product type: office luminaire
- Product name: Taris® 21
- Order No.: 5MT217704WD

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: axial lens, structured
- Glare reduction: micro louvre
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 6140lm
- Luminous efficacy: 166lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 37W

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Protection symbol: F
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE, ENEC, VDE

Material, Colour

- housing: plastic, traffic white (RAL 9016)
- luminaire housing: plastic, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: axial lens of PMMA

Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 230V, 230..240V, 50Hz, AC

Dimensions, Weight


- Length: 1510mm
- Width: 134mm
- Height: 50mm
- Weight: 4.1kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 5MT217704WD | GTIN (EAN): 4058352219218

Dimensions: Tar21,LED6140lm840,0/1,surf

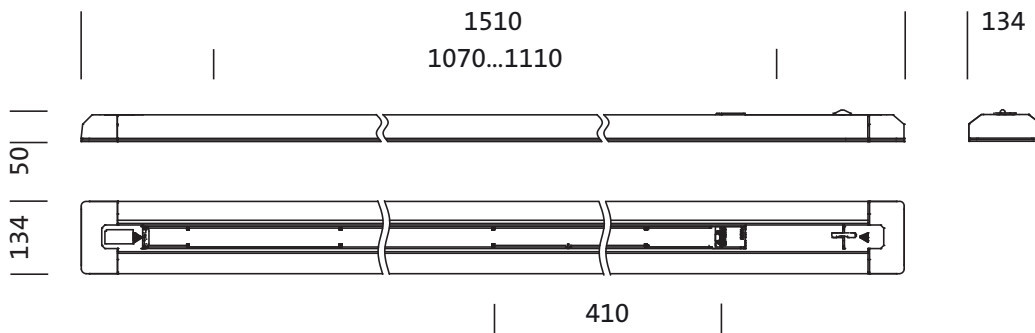

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MT217704WD | **GTIN (EAN):** 4058352219218


Planning data: Tar21,LED6140lm840,0/1,surf

5MT217704WD: 1x LED

4058352219218

5MT217704WD

LED 4000 K | CRI ≥ 80 ϕ_{N} 6140 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	1278	1897
L ₇₀	1403	2760
L ₆₅	1378	2998

UGR 17.8 18.9

X 4H Y 8H ρ 70/50/20 S 0.25H