

**Order No.:** 5TR103A0H | **GTIN (EAN):** 4039806496393


**Product description:** Mod, trunk.rail, 3lg, L3588, 10x2.5<sup>2</sup>, wh



Modario®, trunking rail, of sheet steel, coated, pure white, 3-length, length: 3.588 mm, width: 58 mm, height: 43mm, through-wiring: 10x 2.5mm<sup>2</sup>, with terminal, 10-pole, max. 2.5mm<sup>2</sup>, protection rating (complete): for IP20/IP40 protection rating, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, standard: EN 60598, packaging unit: 1 piece



Wt. (kg): 5.2  
GTIN (EAN): 4039806496393

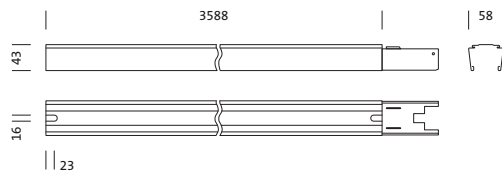

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5TR103A0H | **GTIN (EAN):** 4039806496393

**Detailed technical description:** Mod,trunk.rail,3lg,L3588,10x2.5<sup>2</sup>,wh



#### Key data

- Product type: trunking components group (TS)
- Product name: Modario®
- Order No.: 5TR103A0H

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Lamps:

- Supplement: for electrical and mechanical plug and socket connection of rail elements

#### Certificates, Standards

- Protection rating: for IP20/IP40 protection rating
- Insulation class: insulation class I (protective earthing)
- Standard: EN 60598
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- trunking rail: sheet steel, coated, pure white, 3-length
- Colour specification: pure white

#### Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: terminal, 10-pole, max. 2.5mm<sup>2</sup>
- Through-wiring: 10x 2.5mm<sup>2</sup>

#### Dimensions, Weight

- System units: 12x SE
- Length: 3588mm
- Width: 58mm
- Height: 43mm
- Mounting distance: max. 3.5m
- Weight: 5.2kg


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5TR103A0H | **GTIN (EAN):** 4039806496393

**Dimensions:** Mod,trunk.rail,3lg,L3588,10x2.5<sup>2</sup>,wh

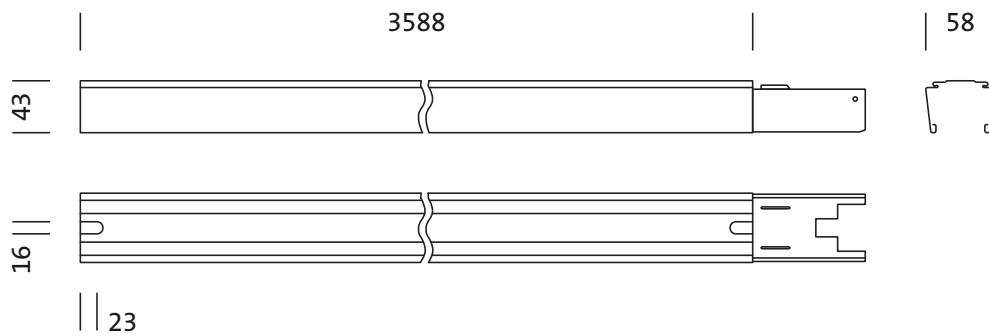

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)