

Order No.: 5TR30600 | GTIN (EAN): 4039806582287


Product description: Modrail-ins



Modario®, rail insert, socket outlet, with plug, 3-pole, with phase selection, mains connection: 240V, AC, 50Hz, socket outlet insert, of sheet steel, coil coated, pure white, 1x system unit, length: 299mm, width: 48mm, protection rating (complete): for IP20 protection rating, insulation class (complete): insulation class I (protective earthing), certification: CE, packaging unit: 1 piece



Wt. (kg): 0.3
GTIN (EAN): 4039806582287

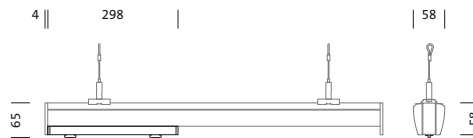

Order No.: 5TR30600 | GTIN (EAN): 4039806582287

Detailed technical description: Modrail-ins



Key data

- Product type: rail insert
- Product name: Modario®
- Order No.: 5TR30600

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: max. current consumption 6A, with Wieland plug system GST 18I3, incl. connection cable with safety coupling (D, A, Scan), 3x 1.5mm², cable length 0.3m, black

Certificates, Standards

- Protection rating: for IP20 protection rating
- Insulation class: insulation class I (protective earthing)
- Certification, designation: CE

Material, Colour

- socket outlet insert: sheet steel, coil coated, pure white, 1x system unit
- Colour specification: pure white

Electrical connection


- Connection: plug, 3-pole, with phase selection
- Nominal voltage: 240V, 50Hz, AC

Dimensions, Weight

- System units: 1x SE
- Length: 299mm
- Width: 48mm
- Weight: 0.3kg

Order No.: 5TR30600 | GTIN (EAN): 4039806582287

Dimensions: Modrail-ins

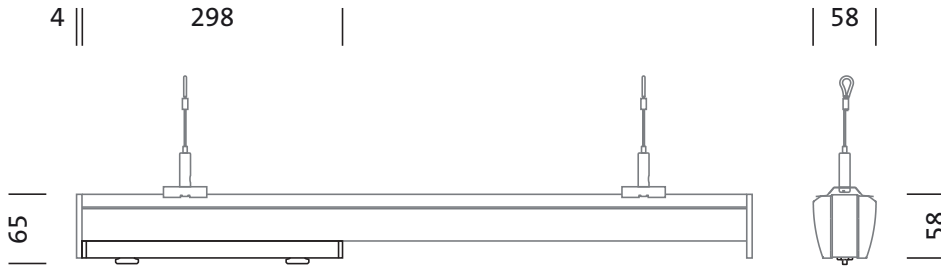

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 12.05.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -