


### **Order No.:** 5TS102A0Q | **GTIN (EAN):** 4039806907066 **Product description:** Mod64,trunk.rail,2lg,L2990,10x2.5<sup>2</sup>,wh



Modario<sup>®</sup> IP64, trunking rail, of sheet steel, galvanised, coated, pure white, 2length, length: 2.990 mm, width: 58 mm, height: 43mm, through-wiring: 10x 2.5mm<sup>2</sup>, with terminal, 10-pole, max. 2.5mm<sup>2</sup>, protection rating (complete): for IP64 protection rating, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, standard: EN 60598, packaging unit: 1 piece

Wt. (kg): GTIN (EAN): 4.4 4039806907066



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

# ѕітесо

### Order No.: 5TS102A0Q | GTIN (EAN): 4039806907066 Detailed technical description: Mod64,trunk.rail,2lg,L2990,10x2.5<sup>2</sup>,wh



#### Key data

- Product type: trunking components group (TS)
- Product name: Modario® IP64
- Order No.: 5TS102A0Q

# Lighting technology | Lamps | Control gear

#### **Component 1**

#### Lamps:

 Supplement: for electrical and mechanical plug and socket connection of rail elements

#### **Certificates, Standards**

- Protection rating: for IP64 protection rating
- Insulation class: insulation class I (protective earthing)
- Standard: EN 60598
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- trunking rail: sheet steel, galvanised, coated, pure white, 2-length
- Colour specification: pure white

#### Mounting

- Mounting method, mounting location: suspended mounting, surfacemounted, to the ceiling
- Arrangement: single/continuous arrangement

#### **Electrical connection**


- Connection: terminal, 10-pole, max.
  2.5mm<sup>2</sup>
- Through-wiring: 10x 2.5mm<sup>2</sup>

#### **Dimensions, Weight**

- System units: 10x SE
- Length: 2990mm
- Width: 58mm
- Height: 43mm
- Mounting distance: max. 3.5m
- Weight: 4.4kg

# ѕітесо

## **Order No.:** 5TS102A0Q | **GTIN (EAN):** 4039806907066 **Dimensions:** Mod64,trunk.rail,2lg,L2990,10x2.5<sup>2</sup>,wh

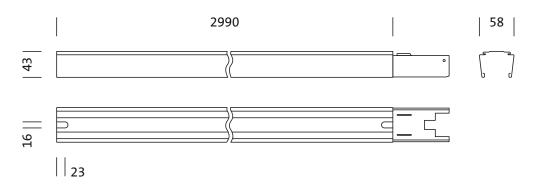

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -