

**Order No.:** 5XA861D4N0X | **GTIN (EAN):** 4069025029072

**Product description:** TV20VPL,LED,5120lm840,DALI,PC,dir,surf



TV 20, vandal-proof luminaire, primary light control with specular reflector, of aluminium, matt, primary optical cover: enclosure, of PC, frosted, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 5.120lm, luminous efficacy: 102lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI, mains connection: 230V, AC, 50Hz, rated input power: 50W, luminaire housing, of aluminium, coated, Siteco® metallic grey (DB 702S), with wall and ceiling fixing element, length: 1.561mm, width: 260mm, height: 70mm, mounting height: 2.5..4.0m, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, protection symbol: F, impact resistance: 2x IK10, standard: EN 60598, packaging unit: 1 piece


4050737978338

5XA861D4N0X


LED 4000K / CRI ≥ 80

Φ<sub>h</sub> 5120 lm

IP 65 2xIK 10

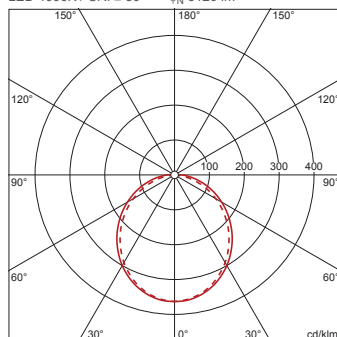

Lamps: LED  
Wt. (kg): 8.9  
GTIN (EAN): 4069025029072

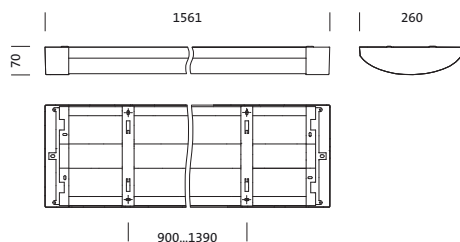

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5XA861D4N0X | **GTIN (EAN):** 4069025029072

**Detailed technical description:** TV20VPL,LED,5120lm840,DALI,PC,dir,surf



#### Key data

- Product type: vandal-proof luminaire
- Product name: TV 20
- Order No.: 5XA861D4N0X

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Light control: specular reflector of aluminium, matt
- Cover: enclosure, frosted
- Symmetry: symmetric
- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 5120lm
- Luminous efficacy: 102lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 50W

#### Operating device:

- Control gear: ECG DALI
- Control: DALI

#### Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Impact resistance: 2x IK10
- Protection symbol: F
- Standard: EN 60598
- Certification, designation: CE

#### Material, Colour

- luminaire housing: aluminium, coated, Siteco® metallic grey (DB 702S), with wall and ceiling fixing element
- Colour specification: Siteco® metallic grey (DB 702S)
- Cover: enclosure of PC

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall
- Arrangement: single/continuous arrangement

#### Electrical connection

- Nominal voltage: 230V, 50Hz, AC

#### Dimensions, Weight


- Length: 1561mm
- Width: 260mm
- Height: 70mm
- Weight: 8.9kg

#### Service life

- Rated service life: 50000h (L80/B10) at AT = 25°C

**Order No.:** 5XA861D4N0X | **GTIN (EAN):** 4069025029072

**Dimensions:** TV20VPL,LED,5120lm840,DALI,PC,dir,surf

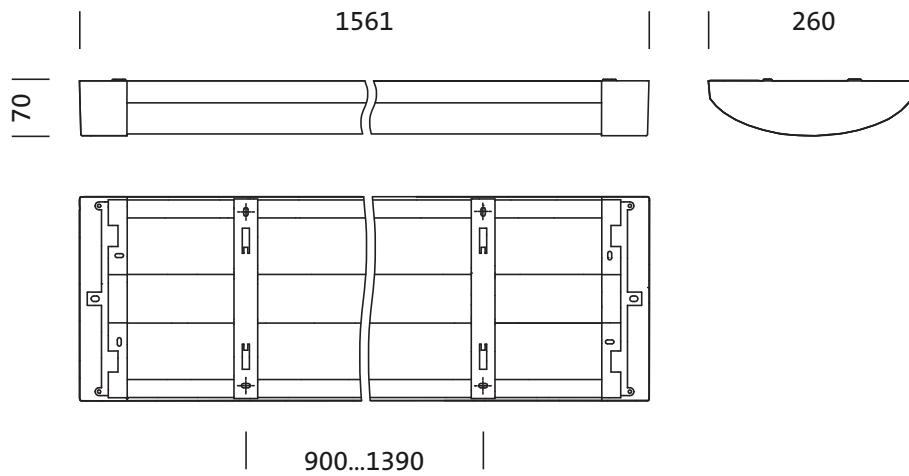

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5XA861D4N0X | GTIN (EAN): 4069025029072

Planning data: TV20VPL,LED,5120lm840,DALI,PC,dir,surf


5XA861D4N0X: 1x LED 4000K  
/ CRI ≥ 80

4050737978338

5XA861D4N0X

LED 4000K / CRI ≥ 80

Φ<sub>N</sub> 5120 lm

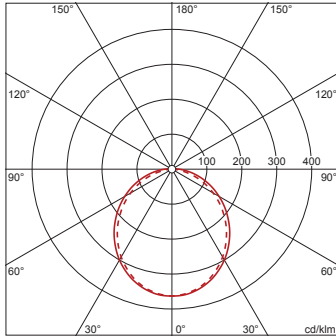

C 0/180

C 90/270

No. of luminaires in room

Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m²	0.6	0.7	1.2	1.4	3.0	3.5
30 m²	0.9	1.0	1.8	2.0	4.5	5.0
40 m²	1.1	1.3	2.3	2.5	5.7	6.3
50 m²	1.4	1.5	2.7	3.0	6.8	7.6
75 m²	2.0	2.2	4.0	4.3	9.9	11
100 m²	2.6	2.8	5.1	5.5	13	14
500 m²	12	12	23	24	58	60

Maintenance factor 0.8

Rh = Lh