

Order No.: 59US1HXSPR2A | **GTIN (EAN):** 4058352361979


Product description: SConsens,PIR-sens,SI



SITECO ConnectSensor-Head PR2-S, slave, local control - self-sufficient standalone sensors, central control - connection to lighting or building management, dimmable, installation type: slip-in mounting, installation location: to the ceiling, to the Modario® trunking rail, to the Licross® trunking rail, of plastic, protection rating (complete): IP54, certification: CE, VDE, 1 x PIR movement sensor, 1 x light sensor, packaging unit: 1 piece



Wt. (kg): 0.1
GTIN (EAN): 4058352361979



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 59US1HXSPR2A | **GTIN (EAN):** 4058352361979

Detailed technical description: SConsens,PIR-sens,SI



Key data

- System family: Siteco Connect 11, DALI-2, SITECO Connect, SITECO Connect 22
- Product type: sensor
- Product name: SITECO Connect
- Order No.: 59US1HXSPR2A

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI 2, dimmable

Certificates, Standards

- Protection rating: IP54
- Temperature range (operation): - 20..+50°C
- Certification, designation: CE, VDE

Material, Colour

- housing: plastic, white
- Colour specification: white

Mounting

- Mounting method, mounting location: slip-in mounting, to the ceiling, to the Modario® trunking rail, to the Licross® trunking rail
- Mounting height: 4..14m
- Supplement: only suitable for use in indoor areas

Dimensions, Weight

- Length: 95mm
- Width: 95mm
- Height: 65mm
- Weight: 0.1kg

Inputs

1x PIR movement sensor

- Connection: system connector
- Detection range: max. 30x4m
- Option: 5 detection levels, 120 switching zones
- Feature: rectangular detection area

1x light sensor

- Feature: light sensor with 'local control' without function



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 59US1HXSPR2A | GTIN (EAN): 4058352361979

Dimensions: SConsens,PIR-sens,SI

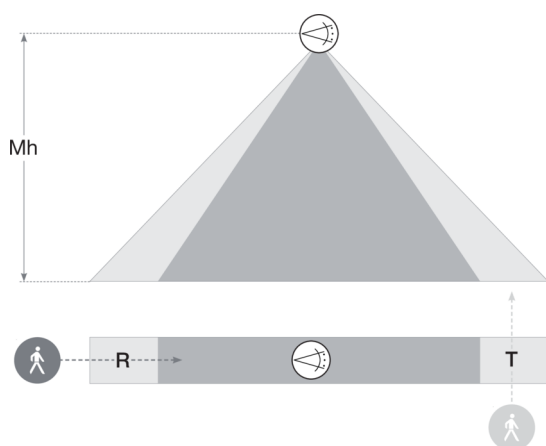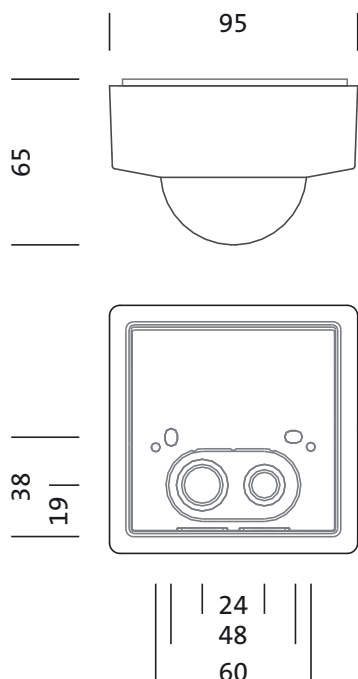

Sensor Head PR2

Mh	R	T
14m	30 x 4m	30 x 4m
12m	30 x 4m	30 x 4m
10m	25 x 4m	25 x 4m
8m	20 x 4m	20 x 4m
6m	15 x 4m	15 x 4m
4m	10 x 4m	10 x 4m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -