

Order No.: 59US1HXMPR1A | **GTIN (EAN):** 4058352363850


Product description: SConsens,PIR-sens,SI



SITECO ConnectSensor-Head PR1-M, master, local control - self-sufficient standalone sensors, switchable, dimmable, installation type: slip-in mounting, installation location: to the Licross® trunking rail, to the Modario® trunking rail, to the ceiling, of plastic, protection rating (complete): IP54, certification: CE, VDE, 1 x PIR movement sensor, 1 x light sensor, 1 x IR receiver, packaging unit: 1 piece



Wt. (kg): 0.1
GTIN (EAN): 4058352363850



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 59US1HXMPR1A | **GTIN (EAN):** 4058352363850

Detailed technical description: SConsens,PIR-sens,SI



Key data

- System family: SITECO Connect
- Product type: sensor
- Product name: SITECO Connect
- Order No.: 59US1HXMPR1A

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI, switchable, dimmable

Certificates, Standards

- Protection rating: IP54
- Temperature range (operation): - 20..+50°C
- Certification, designation: CE, VDE

Material, Colour

- housing: plastic, white
- Colour specification: white

Mounting

- Mounting method, mounting location: slip-in mounting, to the ceiling, to the Modario® trunking rail, to the Licross® trunking rail
- Mounting height: 2.5..5m
- Supplement: only suitable for use in indoor areas

Dimensions, Weight

- Length: 95mm
- Width: 95mm
- Height: 65mm
- Weight: 0.1kg

Inputs

1x PIR movement sensor

- Connection: system connector
- Detection range: max. 23x6m
- Option: 5 detection levels, 280 switching zones
- Feature: detection range can be limited with shield, rectangular detection area

1x IR receiver

- Feature: IR receiver for programming with Smart Remote



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 59US1HXMPR1A | GTIN (EAN): 4058352363850

Dimensions: SConsens,PIR-sens,SI

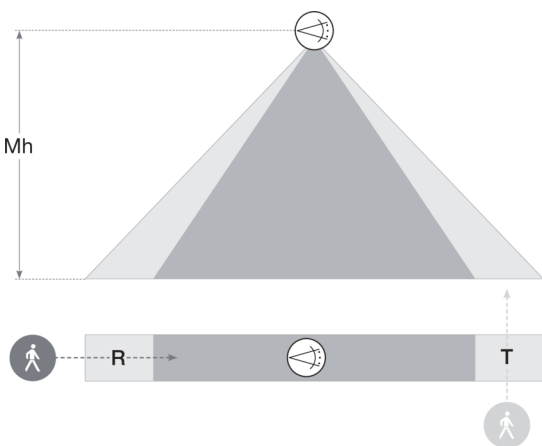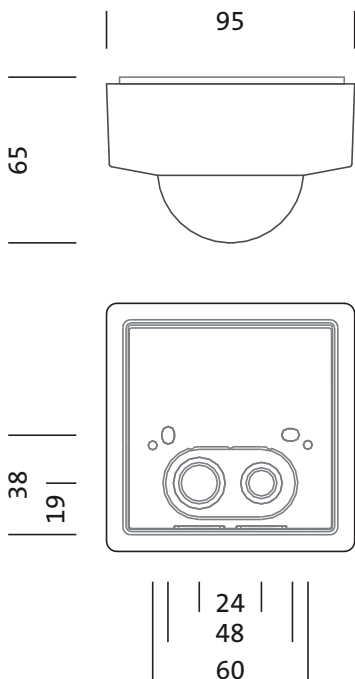

Sensor Head PR1

Mh	R	T
2,5m	14 x 4m	20 x 4m
3,5m	14 x 4m	20 x 4m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -