

**Order No.:** 56TL6MDSPC3A | **GTIN (EAN):** 4058352407653

**Product description:** Licsens,PIR-sens,rec



Licross®sensor PC3, slave, central control - connection to lighting or building management, dimmable, installation type: recessed, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, 1 x PIR movement sensor, 1 x light sensor, 1 x DALI-2, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.3  
GTIN (EAN): 4058352407653

**Order No.:** 56TL6MDSPC3A | **GTIN (EAN):** 4058352407653

**Detailed technical description:** Licensens,PIR-sens,rec



## Key data

- System family: Siteco Connect 11, SITECO Connect 22
- Product type: sensor
- Product name: Licross®
- Order No.: 56TL6MDSPC3A

## Lighting technology | Lamps | Control gear

### Component 1

#### Lamps:

- Supplement: internal wiring halogen-free

#### Operating device:

- Control: DALI 2, dimmable

## Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE, UKCA

## Material, Colour

- sensor module: sheet steel, coil coated, silver
- Colour specification: silver

## Mounting

- Mounting method, mounting location: recessed, to the Licross® trunking rail
- Mounting height: 2.5..5m
- Supplement: only suitable for use in indoor areas

## Dimensions, Weight

- Length: 300mm
- Width: 66mm
- Height: 71mm
- Weight: 0.3kg

## Inputs

### 1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection range: tangential max. 4x5m
- Detection range: max. 2x 2m

### 1x light sensor

- Illuminance: 2..1000lx



## Outputs

### 1x DALI-2

- Feature: DALI, slave function, DALI current max. 6mA

Order No.: 56TL6MDSPC3A | GTIN (EAN): 4058352407653

Dimensions: Licsens,PIR-sens,rec

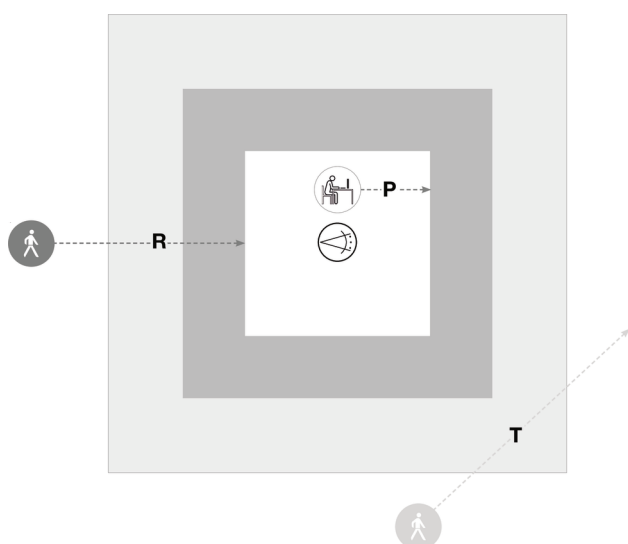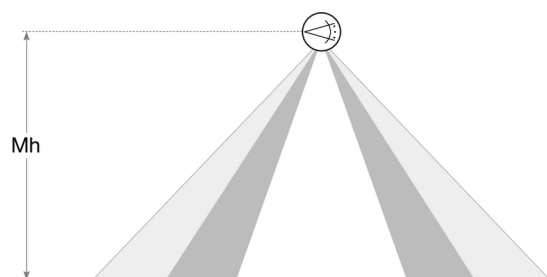

## Sensor PS3

| Mh   | R    | T        | P        |
|------|------|----------|----------|
| 2,8m | 4x4m | ca. 4x5m | ca. 2x2m |

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 06.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -