

**Order No.:** 5EA40EH01 | **GTIN (EAN):** 4058352450178

**Product description:** SConWi,SmartPlugMotionHigh



SITECO Connect WirelessSmart Plug Motion High, sensor, communication: 2.4GHz, local mesh radio network, D4i type A, control: local setting and operation with USB stick, by daylight, by movement, manual, by time, by timer, by weekday, via API, optionally via radio push button, sensor technology: 1 PIR movement sensor, daylight sensor, temperature sensor, inclination sensor, Smart Interface below, Logarithmic DALI dimming curve preset. Can be switched to linear via software, installation type: screw fastening, installation location: to the luminaire, of plastic, voltage: 24V, voltage type: DC, PIR movement sensor, protection rating (complete): IP66, certification: CE, packaging unit: 1 piece

IP 66 CE

Wt. (kg): 0.1  
GTIN (EAN): 4058352450178

**Order No.:** 5EA40EH01 | **GTIN (EAN):** 4058352450178

**Detailed technical description:** SConWi,SmartPlugMotionHigh



#### Key data

- System family: SITECO Connect 31 Wireless
- Product type: sensor
- Product name: SITECO Connect Wireless
- Order No.: 5EA40EH01

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Operating device:

- Control: D4i, Smart Interface below, Logarithmic DALI dimming curve preset. Can be switched to linear via software

#### Certificates, Standards

- Protection rating: IP66
- Temperature range (operation): -40..+85°C
- Standard: according to Zhaga book 18
- Certification, designation: CE

#### Material, Colour

- housing: plastic, transparent, colour-backed, transparent
- Colour specification: transparent

#### Mounting

- Mounting method, mounting location: screw fastening, to the luminaire
- Mounting height: 6..12m

#### Electrical connection

- Nominal voltage: 24V, DC

#### Dimensions, Weight

- Weight: 0.1kg

#### Inputs


#### PIR movement sensor

- Detection range: max. ø18m

Order No.: 5EA40EH01 | GTIN (EAN): 4058352450178

Dimensions: SConWi,SmartPlugMotionHigh

Detection zone "Smart Plug Motion High"  
5EA40EH01

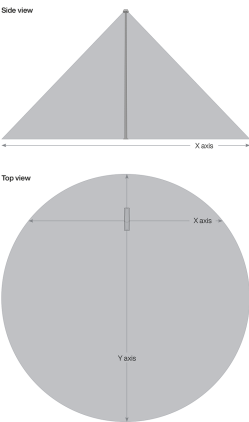

Mounting height	X axis	Y axis
7.0 m	11.9 m	12.4 m
8.0 m	13.6 m	14.2 m
9.0 m	15.3 m	15.9 m
10.0 m	17.0 m	17.7 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -