

**Order No.:** 5LZ904722A | **GTIN (EAN):** 4058352541524


**Product description:** SConsens,lightsens,surf



SITECO Connectlight sensor D1, slave, central control - connection to lighting or building management, dimmable, installation type: surface-mounted, installation location: to the ceiling, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, voltage: 120..277V, voltage type: AC, 1 x light sensor, 1 x DALI-2, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.1  
GTIN (EAN): 4058352541524



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ904722A | **GTIN (EAN):** 4058352541524

**Detailed technical description:** SConsens,lightsens,surf



## Key data

- System family: Siteco Connect 11, SITECO Connect 21
- Product type: sensor
- Product name: SITECO Connect
- Order No.: 5LZ904722A

## Outputs

### 1x DALI-2

- System current: 7mA

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: DALI 2, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+50°C
- Certification, designation: CE, UKCA

#### Material, Colour

- surface-mounted housing: plastic, white
- Colour specification: white

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Mounting height: 4..12m
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: screw terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 120..277V, 50/60Hz, AC

#### Dimensions, Weight

- Length: 135mm
- Width: 115mm
- Height: 37mm
- Weight: 0.1kg

## Inputs

### 1x light sensor

- Connection: light sensor
- Illuminance: 20..800lx
- Option: usability at high altitudes


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ904722A | **GTIN (EAN):** 4058352541524

**Dimensions:** SConsens,lightsens,surf

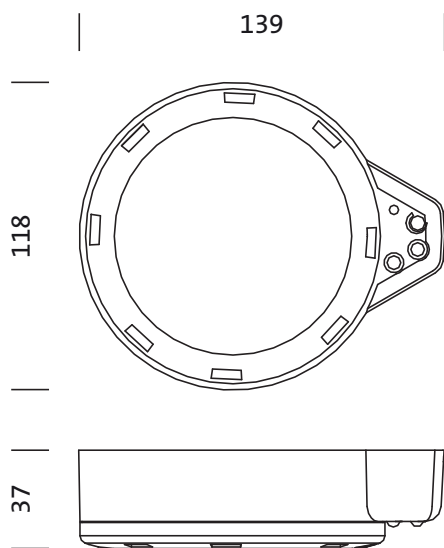

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)