


**Order No.:** GB82470MXSUMNM4WES | **GTIN (EAN):**

**Product description:** MXL/ESA10SOL,LED,845,PMMA,3h,sp



IP 40 

Lamps: LED  
Wt. (kg): 1.2



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** GB82470MXSUMNM4WES | **GTIN (EAN):**

**Detailed technical description:** MXL/ESA10SOL,LED,845,PMMA,3h,sp



#### Key data

- Product type: signage/orientation luminaire
- Product name: MXL/ESA10
- Order No.: GB82470MXSUMNM4WES

#### Dimensions, Weight

- Length: 330mm
- Width: 45mm
- Height: 265mm
- Weight: 1.2kg

#### Lighting technology | Lamps | Control gear

#### Service life

- Rated service life: 50000h (L70/B50) at AT = 25°C

#### Component 1

##### Lighting technology:

- Cover: info panel

##### Lamps:

- Supplement: with self-test function, LED status display: green = system ok; red = failure

##### Operating device:

- Battery: LiFePO4
- Nominal operating time: 3h

#### Component 2

##### Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0..+45°C
- Supplement: manual test and automatic self-test according to BS EN 62034

##### Material, Colour

- ceiling canopy: PC, traffic white (RAL 9016), cable entry from the rear or from above
- Colour specification: traffic white (RAL 9016)
- Cover: info panel of PMMA

##### Mounting

- Mounting method, mounting location: suspended mounting, to the ceiling, to the wall

##### Electrical connection

- Connection: terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** GB82470MXSUMNM4WES | **GTIN (EAN):**

**Dimensions:** MXL/ESA10SOL,LED,845,PMMA,3h,sp

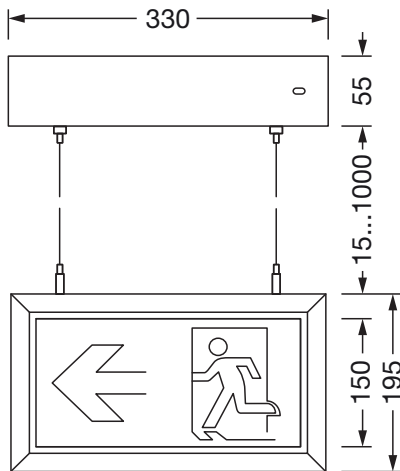

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -