


**Order No.:** 5CL613603 | **GTIN (EAN):** 4058352521571


**Product description:** CL31 Ceiling, 1500lm830, DA



CL 31 Ceiling, ceiling luminaire, primary light control with reflector, of aluminium, primary optical cover: cover panel, of glass, transparent, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 1.500lm, luminous efficacy: 100lm/W, light colour: 830, colour temperature: 3000K, control gear: DALI, with terminal, 5-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V, AC, 50/60Hz, rated input power: 15W, luminaire housing, of aluminium, powder-coated, SITECO metallic grey, length: 120mm, width: 120mm, height: 165mm, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, impact resistance: IK09, permissible operating ambient temperature for outdoor applications: -20..+50°C, packaging unit: 1 piece




Lamps:	LED
Wt. (kg):	2.0
GTIN (EAN):	4058352521571

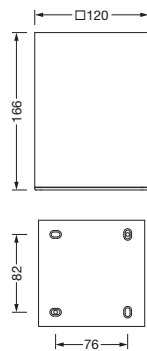

Order No.: 5CL613603 | GTIN (EAN): 4058352521571

Detailed technical description: CL31Ceiling,1500lm830,DA



#### Key data

- Product type: ceiling luminaire
- Product name: CL 31 Ceiling
- Order No.: 5CL613603

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light control: reflector of aluminium
- Cover: cover panel, transparent
- Beam angle: medium distribution, 36°
- Symmetry: symmetric

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 1500lm
- Luminous efficacy: 100lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 15W

#### Operating device:

- Control gear: ECG DALI
- Control: DALI

#### Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK09
- Temperature range (operation): -20..+50°C
- Certification, designation: CE, ENEC

#### Material, Colour

- luminaire housing: aluminium, powder-coated, SITECO metallic grey
- Cover: cover panel of glass

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling

#### Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight



- Length: 120mm
- Width: 120mm
- Height: 165mm
- Weight: 2.0kg

#### Service life

- Rated service life: 65000h (L80/B50) at AT = 25°C

Order No.: 5CL613603 | GTIN (EAN): 4058352521571

Dimensions: CL31 Ceiling, 1500lm830, DA

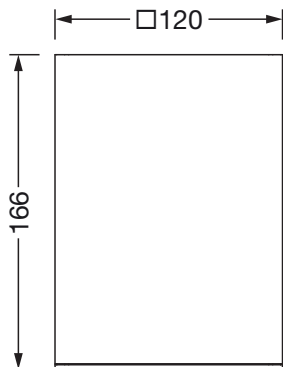

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 14.02.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -