

Order No.: 51SE137CB3A | **GTIN (EAN):** 4058352598962


Product description: Spot21st,26°,3000lm930,0/1,90,wh



Spot 21 standard, directional spotlight, light control with reflector, of aluminium, beam angle: 26°, LED rated luminous flux: 3.000lm, light colour: 930, control gear: ECG, with 3-phase adapter, mains connection: 220..240V, AC, 50/60Hz, housing, of aluminium, white, length: 228mm, diameter: 90mm, adapter, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, impact resistance: IK02, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	0.7
GTIN (EAN):	4058352598962



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51SE137CB3A | **GTIN (EAN):** 4058352598962

Detailed technical description: Spot21st,26°,3000lm930,0/1,90,wh



Key data

- Product type: directional spotlight
- Product name: Spot 21 standard
- Order No.: 51SE137CB3A

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: reflector of aluminium
- Beam angle: 26°
- Symmetry: symmetric

Lamps:

- Lamps: with LED
- Rated luminous flux: 3000lm
- Colour temperature: 3000K
- Colour rendering index: CRI > 90
- Light colour: 930

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Certification, designation: CE

Material, Colour

- housing: aluminium, white
- adapter: plastic

Electrical connection

- Connection: 3-phase adapter
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- Length: 228mm
- Diameter: 90mm
- Weight: 0.7kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 51SE137CB3A | **GTIN (EAN):** 4058352598962

Dimensions: Spot21st,26°,3000lm930,0/1,90,wh

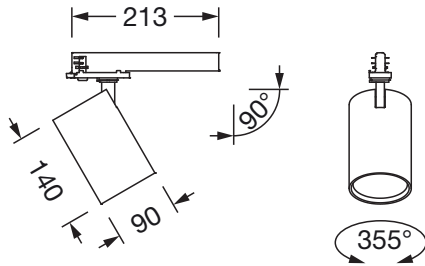

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -