

**Order No.:** 5LZ935202A | **GTIN (EAN):** 4058352838105


**Product description:** SConmultisens,PIR-sens,rec



SITECO Connect, multi-sensor, installation type: recessed, control gear: DALI 2, housing, of plastic, matt pure white (RAL 9010), length: 86mm, width: 86mm, height: 63mm, recess depth: 30mm, multi-sensor PC4, local control - self-sufficient standalone sensorscentral control - connection to lighting or building management, equipment: slave, dimmable, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, permissible operating ambient temperature: - 10..+40°C, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.1  
GTIN (EAN): 4058352838105

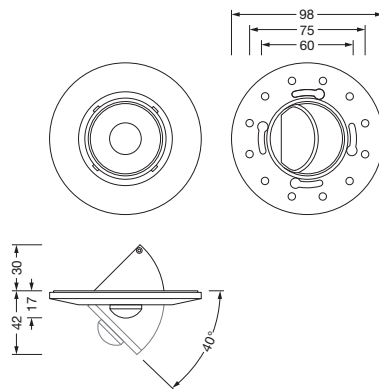

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 03.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ935202A | **GTIN (EAN):** 4058352838105

**Detailed technical description:** SConmultisens,PIR-sens,rec



## Key data

- System family: SITECO Connect 31 Office
- Product type: multi-sensor
- Product name: SITECO Connect
- Order No.: 5LZ935202A

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: DALI 2, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): -10..+40°C
- Certification, designation: CE

#### Material, Colour

- housing: plastic, matt pure white (RAL 9010)
- Colour specification: matt pure white (RAL 9010)

#### Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Mounting height: 2..5m
- Supplement: only suitable for use in indoor areas

#### Dimensions, Weight

- Length: 86mm
- Width: 86mm
- Height: 63mm
- Recess depth: 30mm
- Weight: 0.1kg

#### Inputs

#### 1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection angle: 360°
- Detection range: radial min. ø5m, max. ø7m; tangential min. ø6.5m, max. ø8.5m
- Detection range: min. ø3.5m, max. ø6.0m
- Feature: circular detection area


#### Outputs

#### 1x LED red/green

- Feature: for displaying initialization

Order No.: 5LZ935202A | GTIN (EAN): 4058352838105

Dimensions: SConmultisens,PIR-sens,rec

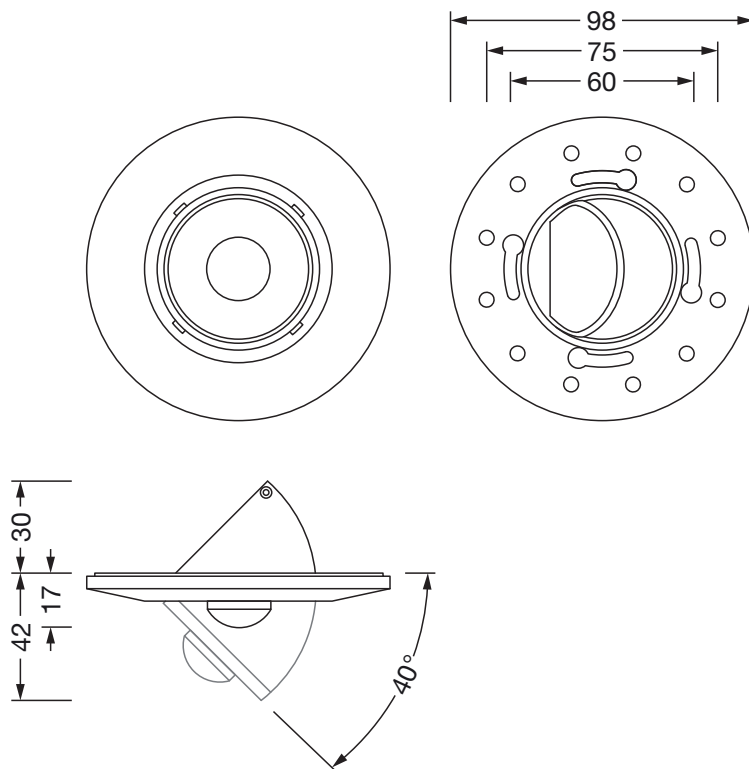

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 03.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -